
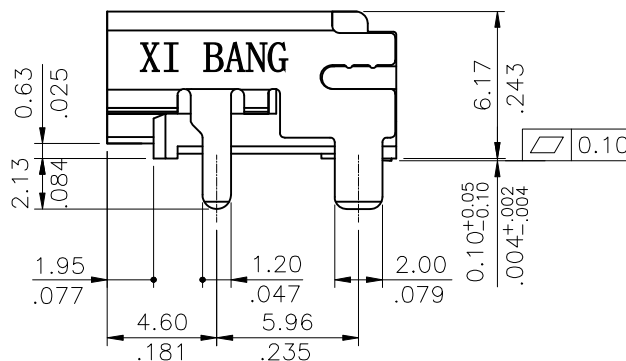


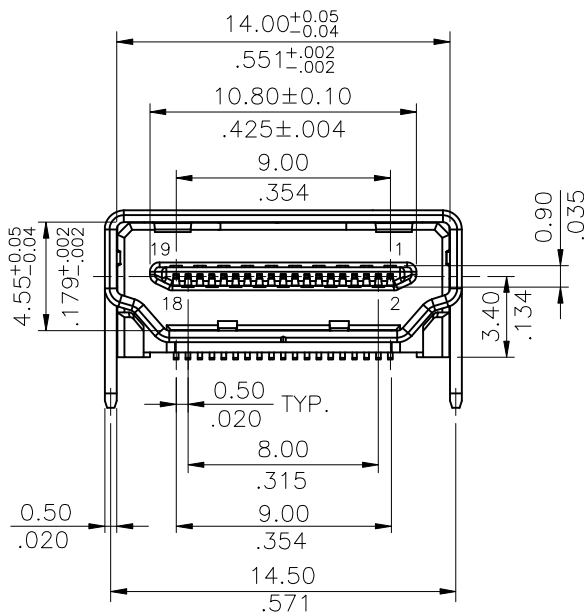



- * Insulation: LCP+30%G.F., UL 94V-0.
Color Black
- * Contacts: Copper Alloy, T= 0.20mm
- * Shell: Copper Alloy, T= 0.50mm.
- * Shell Plating: 50 μ " Nickel plated

CU11	S	A	M	1	OE0	-R0
①	②	③	④	⑤	⑥	⑦

- ① Series No.
- ② S= Socket
- ③ Plating option:
A= Selective Gold flash plated
over $1.27\mu\text{m}(50\mu\text{'})$ Nickel
- ④ Tail style: M= SMT Type
- ⑤ Insulator Color: 1= Black
- ⑥ Option: 0E0= Standard
- ⑦ R0= Tape & Reel



RoHS Compliant

4						DATE	UNIT: mm / inch		TITLE: HDMI SMT RIGHT ANGLE BOARD MOUNT CONNECTOR	XGB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY:	Sun	8/27-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
2				ENGINEER:	Sun	8/27-18'	.X ± 0.25/010	X' ± 1'	MATERIAL:				
1	Sun	8/08-18'	ECRB118037,45/ECNT118188	CHECKED BY:	Eisley	8/30-18'	.XX ± 0.15/006	.X' ±			FINISH:		
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	8/30-18'	.XXX ± 0.10/004	.XX' ±					
										DRAWING NO.	CU1122SB	PART NO.	CU11SAM10E0-R0
										SCALE	4 / 1	SHEET	1 OF 2

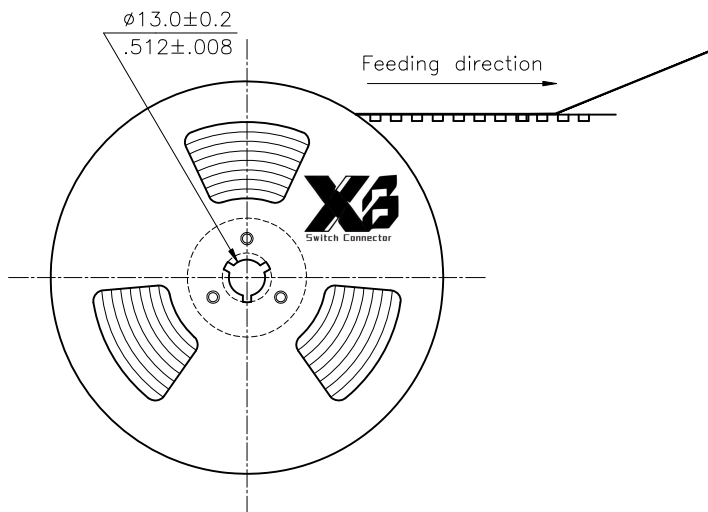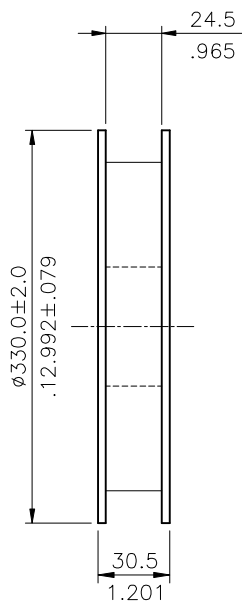

NOTES:

1. MATERIAL:
BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.
TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, BLACK COLOR.
REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.
BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C
2. PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)
3. PEELING SPEED: 300 mm/min.
4. Quantity : 450 PCS/Reel ; 10 Reel/Carton

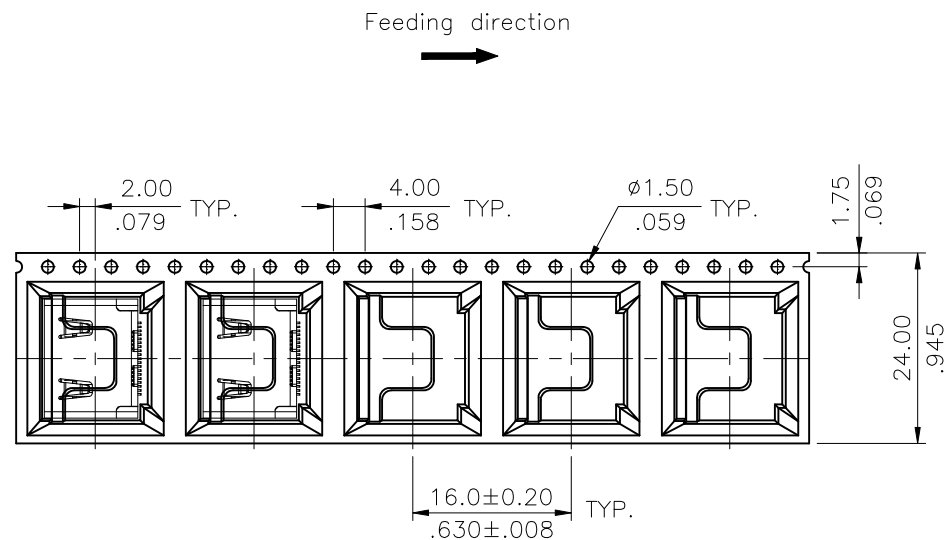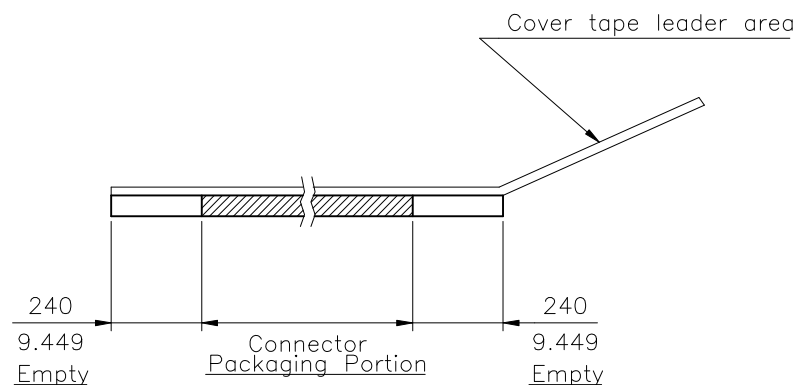

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: HDMI SMT RIGHT ANGLE	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY: Sun	8/27-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED	BOARD MOUNT CONNECTOR				
2				ENGINEER: Sun	8/27-18'	.X ± 0.15/.006 X' ± 1'	MATERIAL:	DRAWING NO. CU1122SB	PART NO. CU11SAM10E0-R0	SHEET 2 OF 2	
1	Sun	8/08-18'	ECRB118037,45/ECNT118188	CHECKED BY: Eisley	8/30-18'	.XX ± 0.10/.004 X' ±	FINISH:	SCALE			
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	8/30-18'	.XXX ± 0.10/.004 XX' ±					