

Material:

Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy

△ Shell: Steel, Nickel plated as standard

Ordering Code

11W1 S0 S0 A 100 000
① ② ③ ④ ⑤ ⑥

① Series No.

② Connector Type:

S0= Receptacle

③ Contact tail Style:

S0= Solder Cup type

④ Singal Contact Plating:

A= Seletive Gold flash plated over Nickel

B= Seletive 15μ" Gold plated over Nickel

C= Seletive 30μ" Gold plated over Nickel

⑤ Insulator Color:

100= Black

600= Green


⑥ Mounting Style:

000= With ø3.05mm holes on shell

A00= Riveted #4-40 UNC close nuts on front shell

B00= Riveted #4-40 UNC open nuts on front shell

C00= Riveted #4-40 UNC open nuts on rear shell

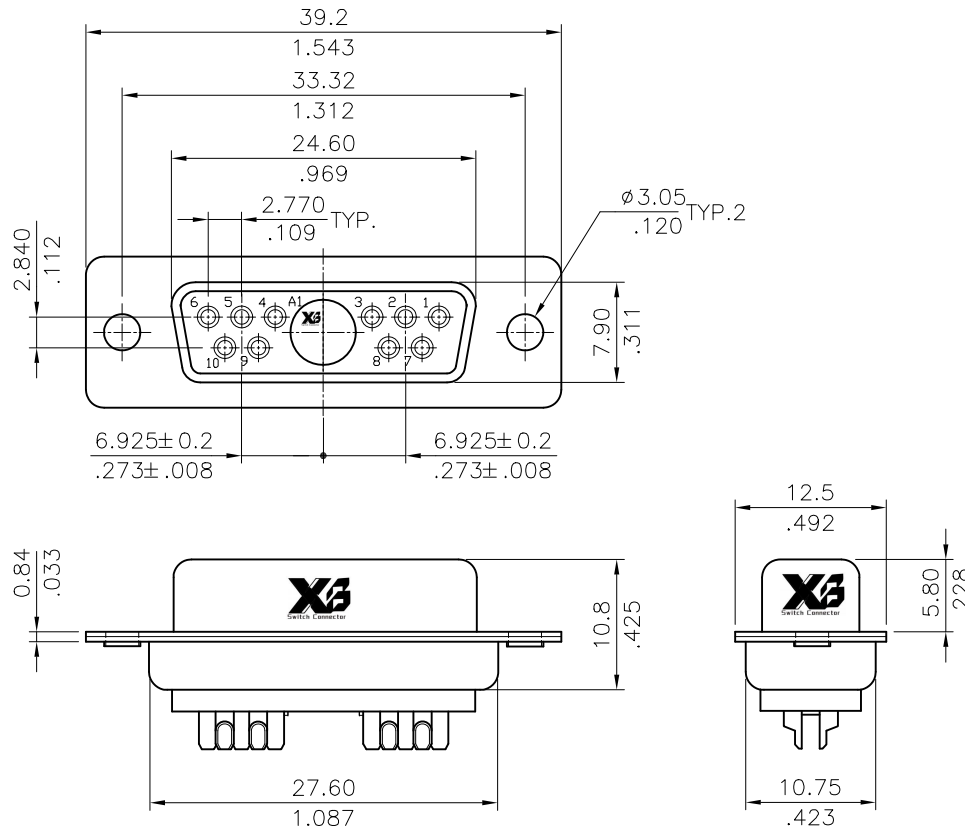

Mounting Style

RoHS Compliant

Code	000	Code	A00	Code	B00	Code	C00
		DIM. L= 5.8mm 		DIM. L= 4.0mm 		DIM. L= 4.0mm 	

4						DATE	UNIT: mm / inch		TITLE: 11W1 FEMALE COMBO D-SUB CONNECTOR (SOLDER CUP TYPE)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD			
3				DRAWN BY:	Karen	1/09-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
2				ENGINEER:	Sun	1/10-18'	.X ±0.30/.012	X' ± 1"	MATERIAL:				
1	Karen	1/09-18'	ECNT117262/ECRT117074	CHECKED BY:	Eisley	1/11-18'	.XX ±0.20/.008	X' ±			DRAWING NO.	11W102SD	PART NO.
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	1/11-18'	.XXX ±0.10/.004	.XX ±	FINISH:	SCALE	2 / 1	SHEET	1 OF 1