

Material:

Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy

Shell: Steel, Tin plated as standard

Ordering Code

17W2 P0 S0 A 100 000
① ② ③ ④ ⑤ ⑥

① Series No.

② Connector Type:

P0= Plug

③ Contact tail Style:

S0= Solder Cup type

④ Signal Contact Plating:

A= Seletive Gold flash plated over Nickel

B= Seletive 15μ" Gold plated over Nickel

C= Seletive 30μ" Gold plated over Nickel

⑤ Insulator Color:

100= Black

600= Green




⑥ Mounting Style:

000= With ø3.05mm holes on shell

A00= Riveted #4-40 UNC close nuts on front shell

B00= Riveted #4-40 UNC open nuts on front shell

C00= Riveted #4-40 UNC open nuts on rear shell

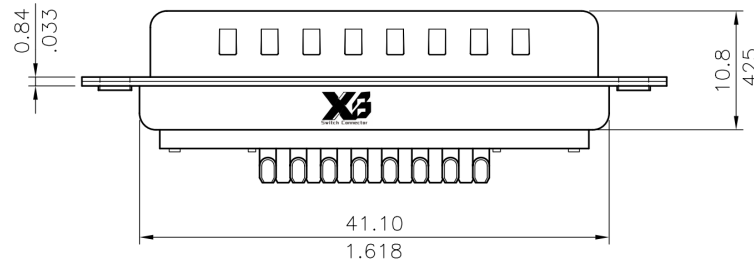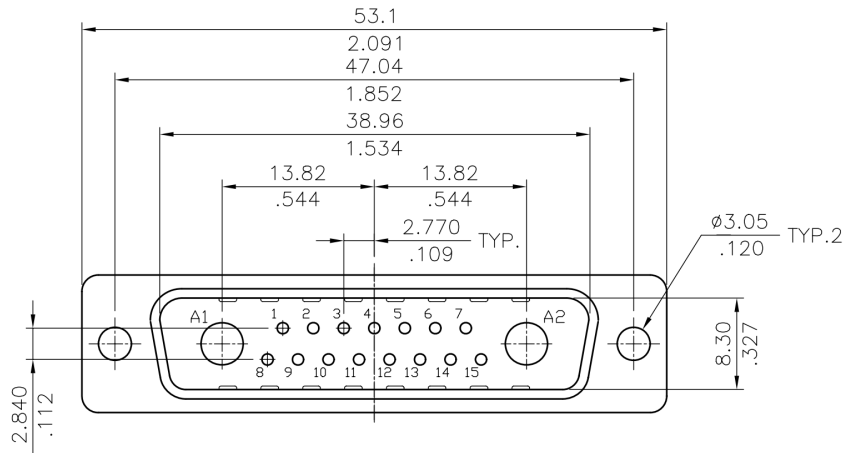

Mounting Style

RoHS Compliant

Code	000	Code	A00	Code	B00	Code	C00
	DIM. L= 5.8mm		DIM. L= 4.0mm		DIM. L= 4.0mm		DIM. L= 4.0mm

4						DATE	UNIT: mm / inch		TITLE: 17W2 MALE COMBO D-SUB CONNECTOR (SOLDER CUP TYPE)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD	
3				DRAWN BY:	James	11/18-02'	TOLERANCE UNLESS OTHERWISE SPECIFIED				MATERIAL:
2				ENGINEER:	David	11/19-02'	.X	±0.30/.012	X' ± 1'	DRAWING NO. 17W201SC	
1				CHECKED BY:	David	11/19-02'	.XX	±0.20/.008	X' ±		FINISH:
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	11/19-02'	.XXX	±0.10/.004	.XX' ±	SCALE 2 / 1	