


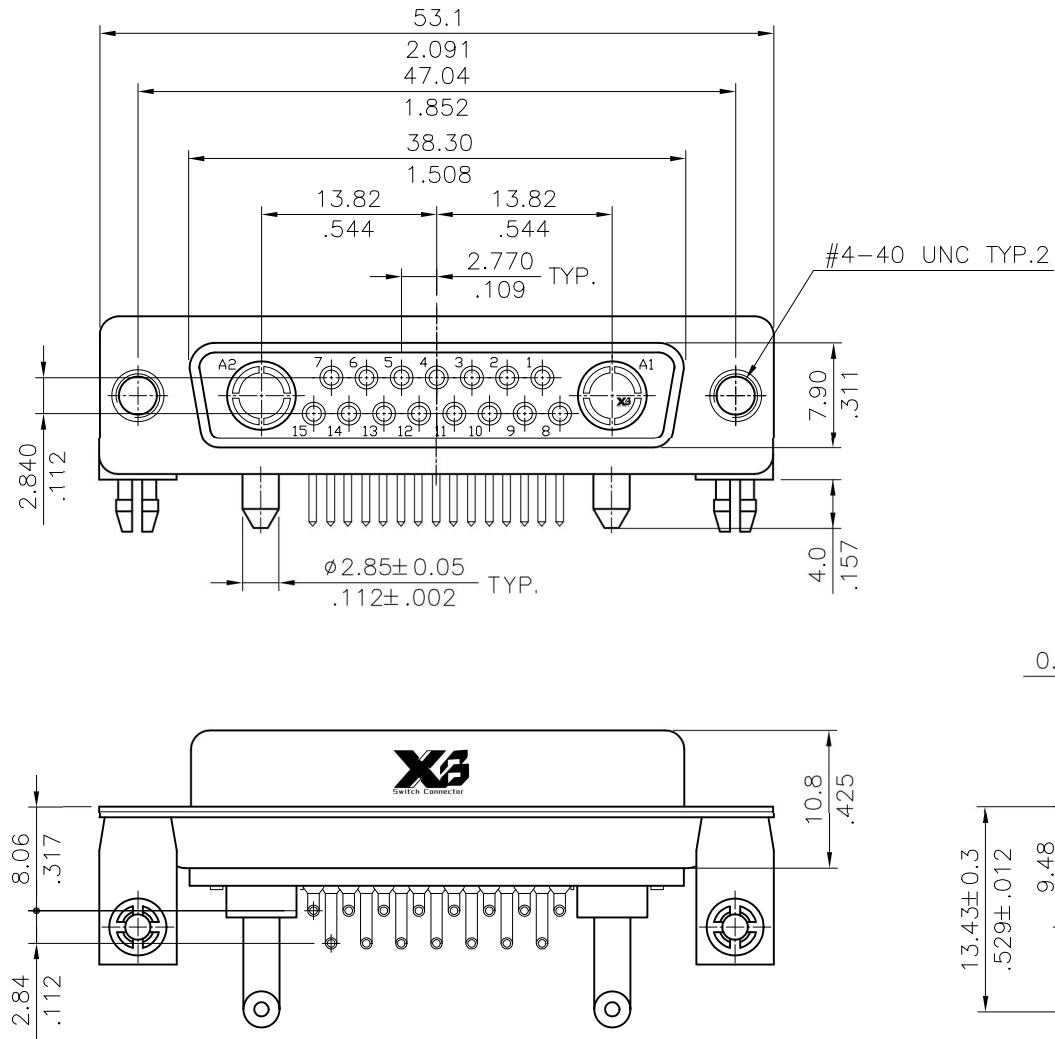

Notes:

Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy

Shell: Steel, Tin plated as standard

High power Contact : Brass with Gold plated

* For Lead Free Wave Flow Process

Lead Free Process

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 17W2 20A HIGH POWER FEMALE D-SUB CONNECTOR (RIGHT ANGLE TYPE)	MATERIAL:	FINISH:	DRAWING NO. 17W212SC	PART NO. 17W2SPH***20***	SCALE 2 / 1	SHEET 1 OF 2
3				DRAWN BY: Karen	4/20-17'	TOLERANCE UNLESS OTHERWISE SPECIFIED							
2				ENGINEER: Sun	4/21-17'	.X ± 0.30/.012	X' ±						
1	Karen	4/18-17'	ECNT117049/ECRT117003	CHECKED BY: Eisley	4/21-17'	.XX ± 0.20/.008	.X' ±						
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	4/21-17'	.XXX ± 0.10/.004	.XX' ±						



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

