

Material:

Insulator: Glass filled Polyester UL 94V-0

Contact: Brass

Shell: Steel, Tin plated as standard

Ordering Code

21W4 P0 S0 A 100 000
① ② ③ ④ ⑤ ⑥

① Series No.

② Connector Type:

P0= Plug

③ Contact tail Style:

S0= Solder Cup type

④ Singal Contact Plating:

A= Seletive Gold flash plated over Nickel

B= Seletive 15 μ " Gold plated over Nickel

C= Seletive 30 μ " Gold plated over Nickel

⑤ Insulator Color:

100= Black

600= Green




⑥ Mounting Style:

000= With $\phi 3.05$ mm holes on shell

A00= Riveted #4-40 UNC close nuts on front shell

B00= Riveted #4-40 UNC open nuts on front shell

C00= Riveted #4-40 UNC open nuts on rear shell

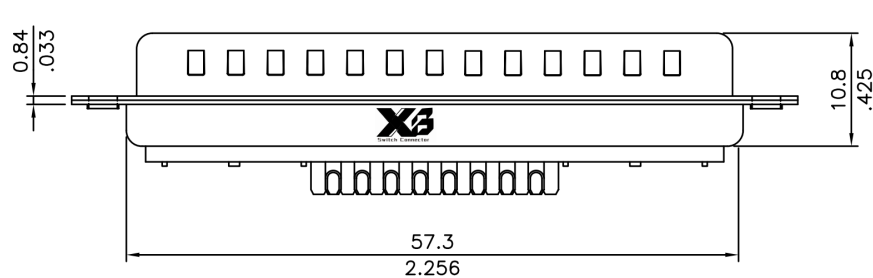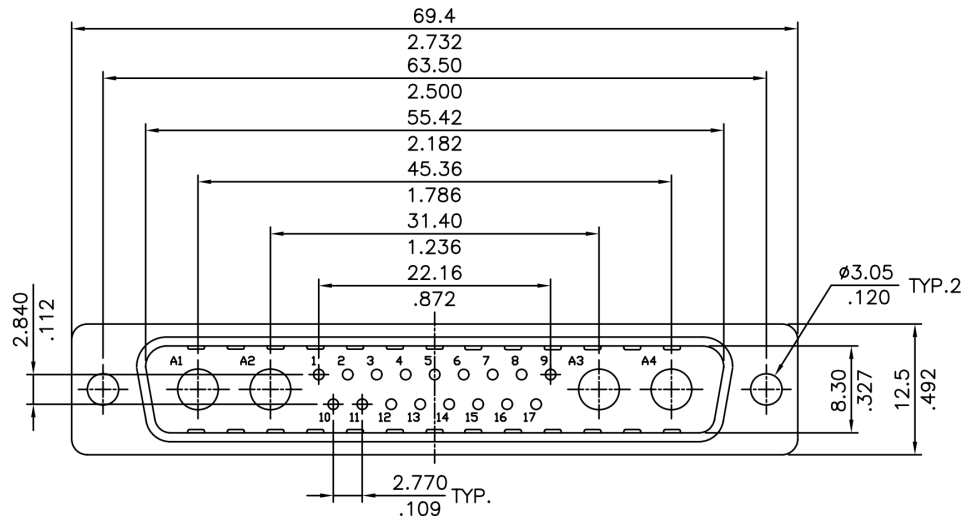

Mounting Style

RoHS Compliant

Code	000	Code	A00	Code	B00	Code	C00
			DIM. L= 5.8mm		DIM. L= 4.0mm		DIM. L= 4.0mm

4					DATE	UNIT: mm / inch	TITLE: 21W4 MALE COMBO D-SUB CONNECTOR (SOLDER CUP TYPE)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
3					DRAWN BY: James	11/18-02'	TOLERANCE UNLESS OTHERWISE SPECIFIED		
2					ENGINEER: David	11/19-02'	.X ±0.30/.012 .X' ± 1'	DRAWING NO. 21W401SC PART NO. 21W4P0S0**00*00	
1					CHECKED BY: David	11/19-02'	.XX ±0.20/.008 .X' ±		
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	11/19-02'	.XXX ±0.10/.004 .XX' ±	FINISH:	SCALE	2 / 1
								SHEET	1 OF 1