




High power Contact : Brass with Gold plated

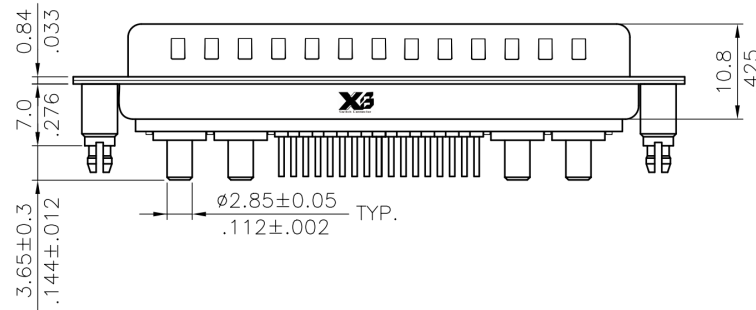

4					DATE	UNIT: mm / inch		TITLE: 21W4 20A HIGH POWER MALE D-SUB CONNECTOR (TOP ENTRY BOARD MOUNT TYPE)	 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD.
3				DRAWN BY: Rita	10/18-01'	TOLERANCE UNLESS OTHERWISE SPECIFIED			
2				ENGINEER: David	10/19-01'	.X ± 0.30/.012	X* ± .1	FINISH:	
1				CHECKED BY: David	10/19-01'	.XX ± 0.20/.008	X* ±		DRAWING NO. 21W407SB PART NO. 21W4PPV***20*00
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	10/19-01'	.XXX ± 0.10/.004	.XX* ±	SCALE 2 / 1 SHEET 1 OF 2	

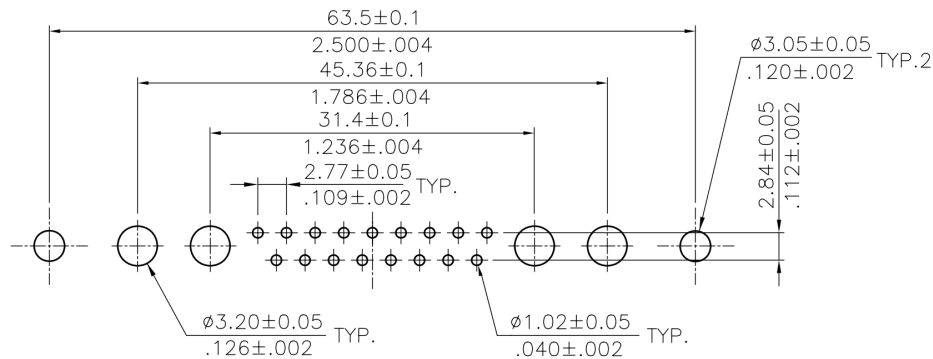

Recommended P.C Board Layout

Ordering Code

21W4 P P V 3 2 1 20 D00
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
② Connector Type: P= Plug
③ Contact type: P= High Power Contact
④ Contact tail style: V= Straight Dip type
⑤ High power contact plating:

2= Gold flash plated over Nickel
3= 15μ" Gold plated over Nickel
4= 30μ" Gold plated over Nickel
5= 50μ" Gold plated over Nickel

- ⑥ Signal contact plating:

2= Gold flash plated over Nickel
3= 15μ" Gold plated over Nickel
4= 30μ" Gold plated over Nickel

- ⑦ Insulator color: 1= Black, 6= Green

- ⑧ Performance: 20= 20A

- ⑨ Mounting Style:

000= With ø3.05mm holes on shell

B00= Riveted #4-40 UNC open nuts on front shell

C00= Riveted #4-40 UNC open nuts on rear shell

D00= Riveted #4-40 UNC ground stand-off
on rear shell(standard)

Mounting Style

RoHS Compliant

Code	000	Code	B00	Code	C00	Code	D00
			DIM. L= 4.0mm		DIM. L= 4.0mm		DIM. L= 7.0mm

4					DATE	UNIT: mm / inch		TITLE: 21W4 20A HIGH POWER MALE D-SUB CONNECTOR (TOP ENTRY BOARD MOUNT TYPE)	XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
3				DRAWN BY:	Rita	10/18-01'	TOLERANCE UNLESS OTHERWISE SPECIFIED			MATERIAL:
2				ENGINEER:	David	10/19-01'				
1				CHECKED BY:	David	10/19-01'	.X ± 0.30/.012 X' ± 1" .XX ± 0.20/.008 .X' ±			FINISH:
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	10/19-01'	.XXX ± 0.10/.004 .XX' ±	DRAWING NO. 21W407SB	PART NO. 21W4PPV***20*00	
								SCALE 2 / 1	SHEET 2 OF 2	