

Material:

Insulator: Glass filled Polyester UL 94V-0

Contact: Brass

Shell: Steel, Tin plated as standard

Ordering Code

25W3 P0 S0 A 100 000
① ② ③ ④ ⑤ ⑥

① Series No.

② Connector Type:

P0= Plug

③ Contact tail Style:

S0= Solder Cup type

④ Signal Contact Plating:

A= Selective Gold flash plated over Nickel

B= Selective 15μ" Gold plated over Nickel

C= Selective 30μ" Gold plated over Nickel

⑤ Insulator Color:

100= Black

600= Green




⑥ Mounting Style:

000= With ø3.05mm holes on shell

A00= Riveted #4-40 UNC close nuts on front shell

B00= Riveted #4-40 UNC open nuts on front shell

C00= Riveted #4-40 UNC open nuts on rear shell

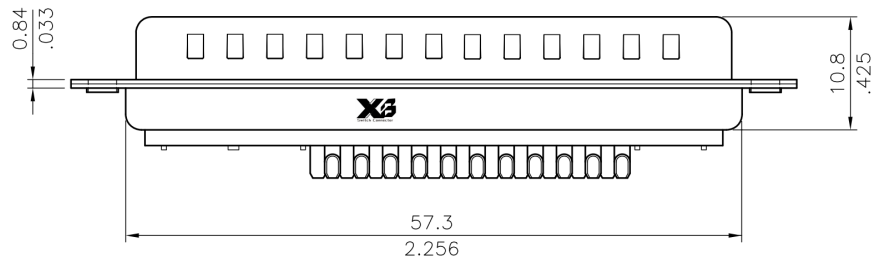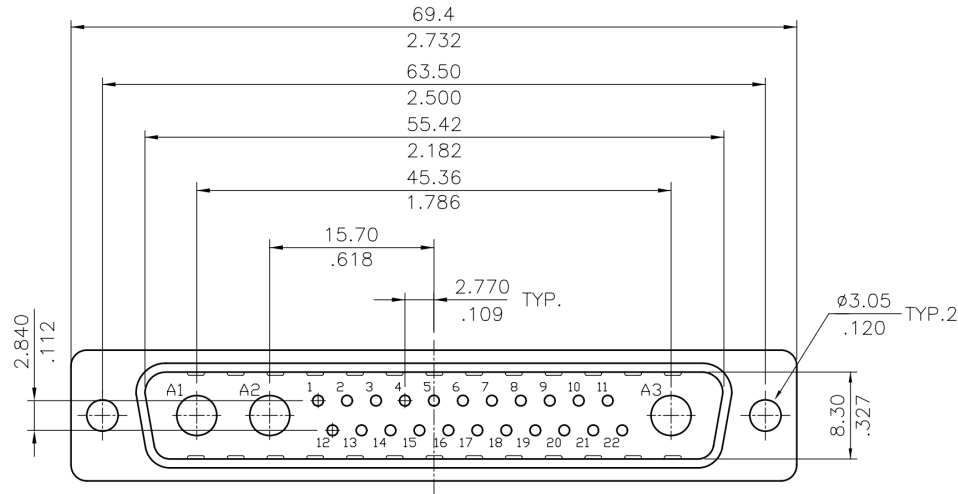

Mounting Style

RoHS Compliant

Code	000	Code	A00	Code	B00	Code	C00
			DIM. L= 5.8mm		DIM. L= 4.0mm		DIM. L= 4.0mm

4					DATE	UNIT: mm / inch		TITLE: 25W3 MALE COMBO D-SUB CONNECTOR (SOLDER CUP TYPE)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY: James	11/18-02'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
2				ENGINEER: David	11/18-02'	.X ±0.30/.012	X' ± .1"	MATERIAL:	DRAWING NO.	25W301SC	PART NO.	25W3P0S0**00*00
1				CHECKED BY: David	11/18-02'	.XX ±0.20/.008	X' ±					
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	11/18-02'	.XXX ±0.10/.004	.XX' ±	FINISH:	SCALE	2 / 1	SHEET	1 OF 1