

Material:

Insulator: Glass filled Polyester UL 94V-0

Contact: Brass

Shell: Steel, Tin plated as standard

Ordering Code

36W4 P0 S0 A 100 000
① ② ③ ④ ⑤ ⑥

① Series No.

② Connector Type:

P0= Plug

③ Contact tail Style:

S0= Solder Cup type

④ Singal Contact Plating:

A= Seletive Gold flash plated over Nickel

B= Seletive 15 μ " Gold plated over Nickel

C= Seletive 30 μ " Gold plated over Nickel

⑤ Insulator Color:

100= Black

600= Green


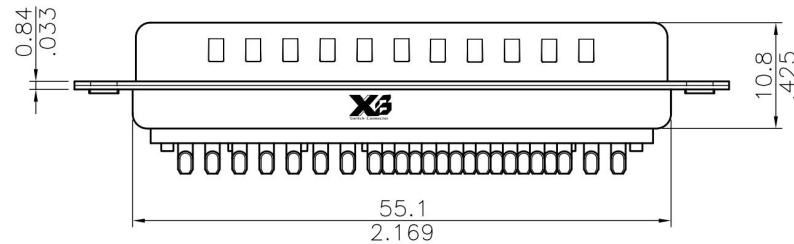
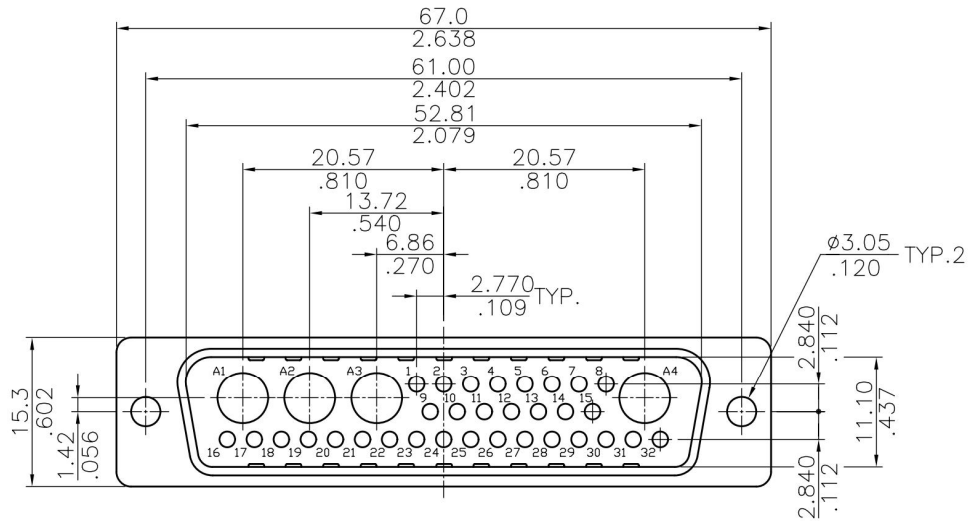
⑥ Mounting Style:

000= With ϕ 3.05mm holes on shell

A00= Riveted #4-40 UNC close nuts on front shell





B00= Riveted #4-40 UNC open nuts on front shell

C00= Riveted #4-40 UNC open nuts on rear shell



Mounting Style

RoHS Compliant

Code	000	Code	A00	Code	B00	Code	C00
		DIM. L= 5.8mm 		DIM. L= 4.0mm 		DIM. L= 4.0mm 	

4					DATE	UNIT: mm / inch		TITLE: 36W4 MALE COMBO D-SUB CONNECTOR (SOLDER CUP TYPE)		X3 Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.				
3				DRAWN BY:	James	11/18-02'	TOLERANCE UNLESS OTHERWISE SPECIFIED							
2				ENGINEER:	David	11/19-02'	.X ±0.30/.012	X' ± 1'	MATERIAL:					
1				CHECKED BY:	David	11/19-02'	.XX ±0.20/.008	X' ±						
Sym	NAME	DATE	REVISIONS	APPROVED BY:	Alex	11/19-02'	.XXX ±0.10/.004	.XX ±	FINISH:		DRAWING NO.	36W401SC	PART NO.	36W4P0S0**00*00
											SCALE	2 / 1	SHEET	1 OF 1