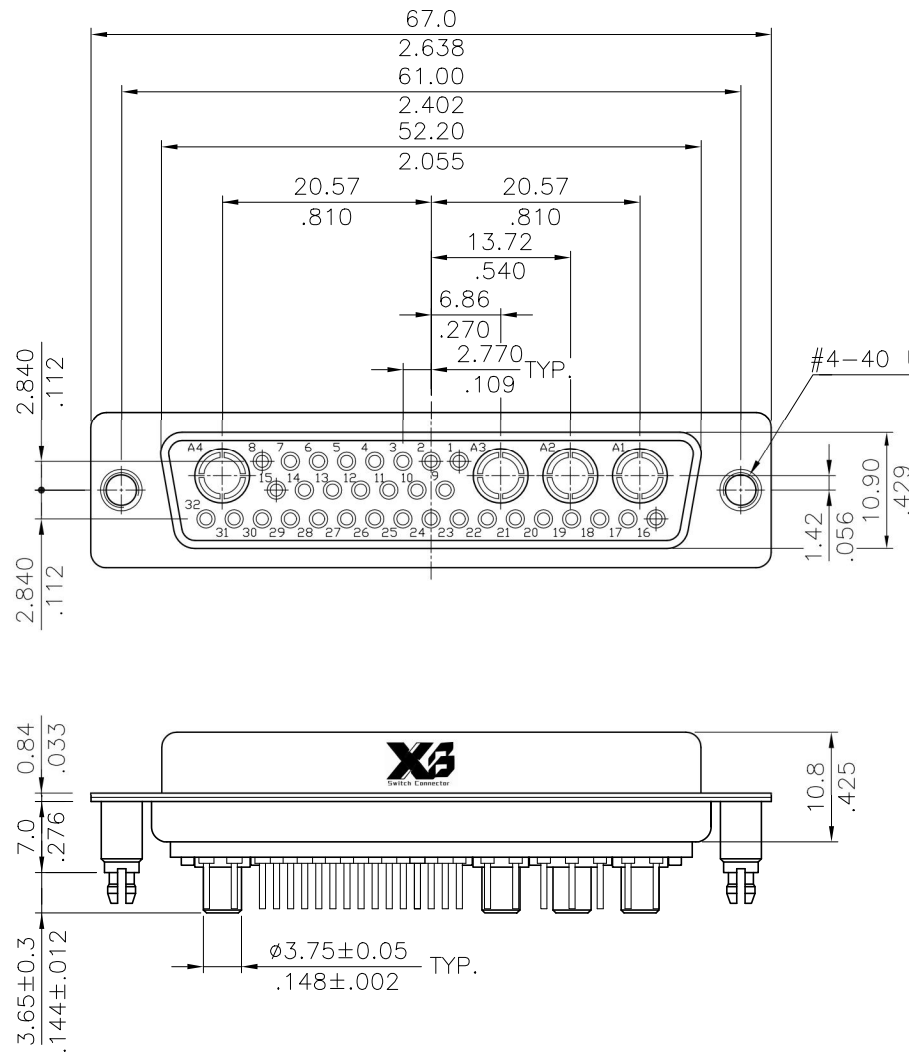




Material:

Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy

Shell: Steel, Tin plated as standard

High power Contact : Brass with Gold plated

Lead Free Process

RoHS Compliant

|     |       |          |           |                    |          |                                         |                                                                                      |                                                                                                                                                    |                          |  |  |
|-----|-------|----------|-----------|--------------------|----------|-----------------------------------------|--------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|--|--|
| 4   |       |          |           |                    | DATE     | UNIT: mm / inch                         | TITLE: 36W4 40A HIGH POWER FEMALE<br>D-SUB CONNECTOR (TOP ENTRY<br>BOARD MOUNT TYPE) |  <b>东莞市溪榜电子有限公司</b><br>DONG GUAN XI BANG ELECTRONIC CO., LTD. |                          |  |  |
| 3   |       |          |           | DRAWN BY: Karen    | 2/26-10' | TOLERANCE<br>UNLESS OTHERWISE SPECIFIED |                                                                                      |                                                                                                                                                    |                          |  |  |
| 2   |       |          |           | ENGINEER: Eisley   | 3/2-10'  | .X ±0.30/.012 X' ± 1'                   | MATERIAL:                                                                            |                                                                                                                                                    |                          |  |  |
| 1   | Karen | 2/26-10' | ECN10040  | CHECKED BY: David  | 3/2-10'  | .XX ±0.20/.008 X' ±                     | FINISH:                                                                              | DRAWING NO. 36W408SC                                                                                                                               | PART NO. 36W4SPV***40*00 |  |  |
| SYM | NAME  | DATE     | REVISIONS | APPROVED BY: David | 3/2-10'  | .XXX ±0.10/.004 X' ±                    |                                                                                      | SCALE 2 / 1                                                                                                                                        | SHEET 1 OF 2             |  |  |

|      |   |   |   |   |   |   |    |     |
|------|---|---|---|---|---|---|----|-----|
| 36W4 | S | P | V | 3 | 2 | 1 | 40 | D00 |
| ①    | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧  | ⑨   |

- |    |            |       |        |      |        |
|----|------------|-------|--------|------|--------|
| 2= | Gold       | flash | plated | over | Nickel |
| 3= | 15 $\mu$ " | Gold  | plated | over | Nickel |
| 4= | 30 $\mu$ " | Gold  | plated | over | Nickel |
| 5= | 50 $\mu$ " | Gold  | plated | over | Nickel |

- 2= Gold flash plated over Nickel  
3= 15 $\mu$ " Gold plated over Nickel  
4= 30 $\mu$ " Gold plated over Nickel

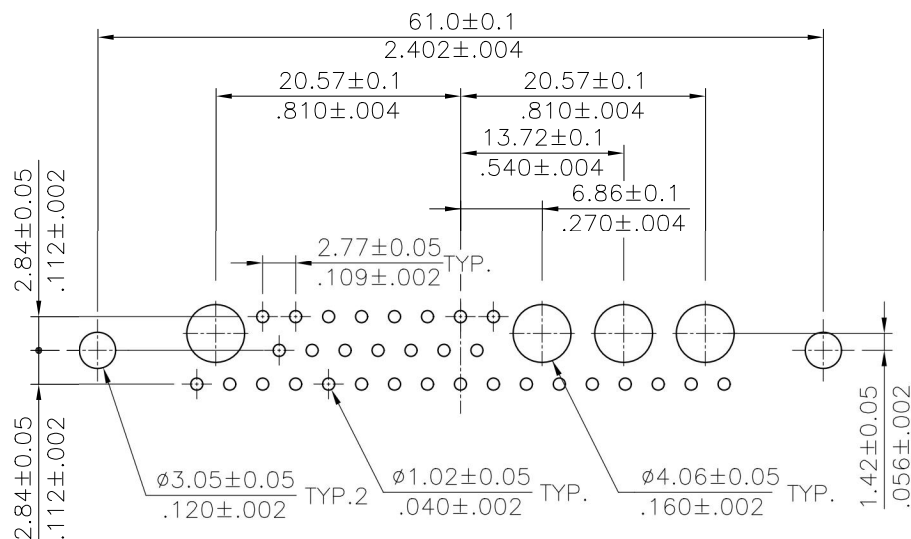
- (8) Performance:  $40 = 40A$

- 000= With  $\varnothing 3.05\text{mm}$  holes on shell

- B00= Riveted #4-40 UNC open nuts on front shell

- C00= Riveted #4-40 UNC open nuts on rear shell





- D00= Riveted #4-40 UNC ground stand-off  
on rear shell(standard)



### Mounting Style

Lead Free Process

RoHS Compliant

| Mounting Style                                                                        |     | Lead Free Process                                                                                       |     | RoHS Compliant                                                                                          |     |
|---------------------------------------------------------------------------------------|-----|---------------------------------------------------------------------------------------------------------|-----|---------------------------------------------------------------------------------------------------------|-----|
| Code                                                                                  | 000 | Code                                                                                                    | B00 | Code                                                                                                    | C00 |
|  |     | DIM. L = 4.0mm<br> |     | DIM. L = 4.0mm<br> |     |
|                                                                                       |     | DIM. L = 7.0mm<br> |     |                                                                                                         |     |

|              |       |          |           |              |        |          |                                         |            |                                                                                      |                                                                                                                               |           |             |          |          |                 |
|--------------|-------|----------|-----------|--------------|--------|----------|-----------------------------------------|------------|--------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|-----------|-------------|----------|----------|-----------------|
| <div>4</div> |       |          |           |              |        | DATE     | UNIT: mm / inch                         |            | TITLE: 36W4 40A HIGH POWER FEMALE<br>D-SUB CONNECTOR (TOP ENTRY<br>BOARD MOUNT TYPE) | <div><div>X3</div><div>Switch Connector</div></div> <div>东莞市溪榜电子有限公司</div> <div>DONG GUAN XI BANG ELECTRONICS CO., LTD.</div> |           |             |          |          |                 |
| <div>3</div> |       |          |           | DRAWN BY:    | Karen  | 2/26-10' | TOLERANCE<br>UNLESS OTHERWISE SPECIFIED |            |                                                                                      |                                                                                                                               | MATERIAL: | DRAWING NO. | 36W408SC | PART NO. | 36W4SPV***40*0C |
| <div>2</div> |       |          |           | ENGINEER:    | Eisley | 3/2-10'  |                                         |            |                                                                                      |                                                                                                                               |           |             |          |          |                 |
| <div>1</div> | Karen | 2/26-10' | ECN10040  | CHECKED BY:  | David  | 3/2-10'  | .X                                      | ±0.30/.012 |                                                                                      |                                                                                                                               | X.*       | ± 1"        | FINISH:  | SCALE    | 2 / 1           |
|              |       |          |           |              |        |          | .XX                                     | ±0.20/.008 | X.*                                                                                  | ±                                                                                                                             |           |             |          |          |                 |
| Sym          | NAME  | DATE     | REVISIONS | APPROVED BY: | David  | 3/2-10'  | .XXX                                    | ±0.10/.004 | .XX.*                                                                                | ±                                                                                                                             |           |             |          |          |                 |