

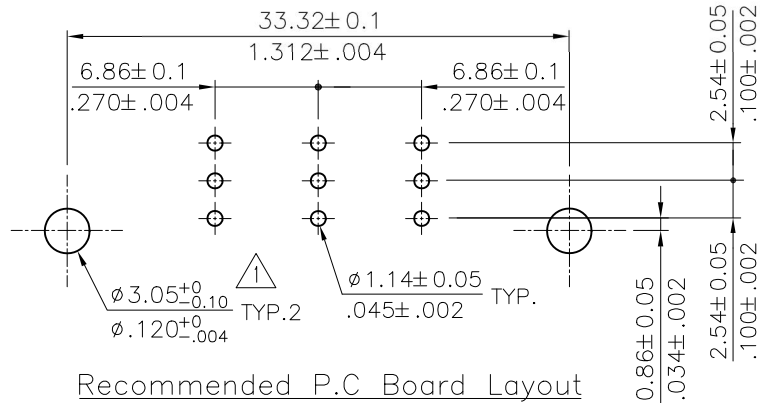
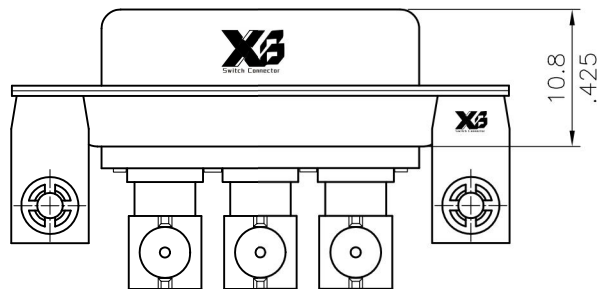


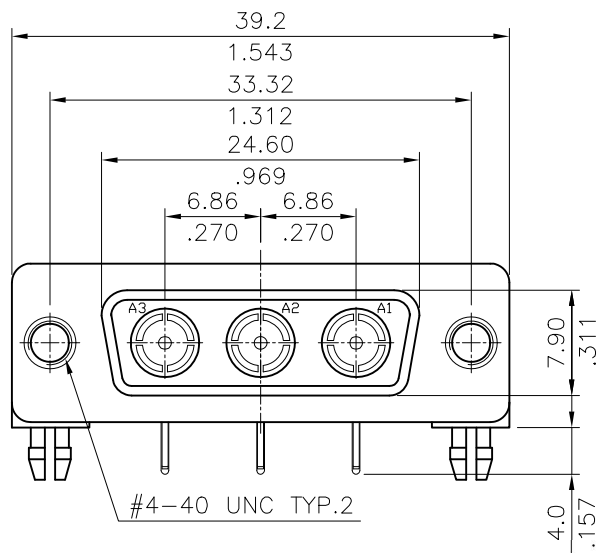

Notes:

- * Insulator: Glass filled Polyester UL 94V-0
- * Shell: Steel, Tin plated as standard
- * Coaxial terminal
Insulator: Teflon UL 94V-0
Color white
- Contact: Brass with Gold plated
- * For Lead Free Wave Flow Process

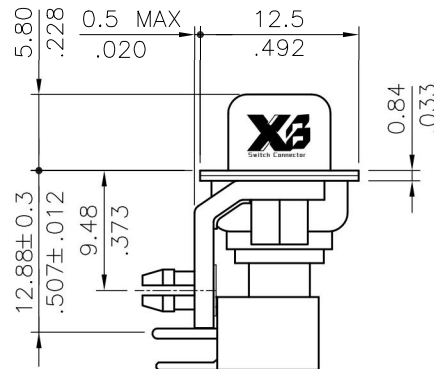

Ordering Code

C3W3 S C H 3 0 1 75 I10
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type: S= Receptacle
- ③ Contact type: C= Coaxial Contact
- ④ Contact tail style: H= Right Angle Dip type
- ⑤ Coaxial contact plating:
2= Gold flash plated over Nickel
3= 15μ" Gold plated over Nickel
4= 30μ" Gold plated over Nickel
5= 50μ" Gold plated over Nickel
- ⑥ Signal contact plating:
0= Without signal contact
- ⑦ Insulator color: 1= Black, 6= Green
- ⑧ Performance: 50= 50Ω, 75= 75Ω
- ⑨ Mounting Style:
000= With Ø3.05mm holes on shell
B00= Riveted #4-40 UNC open nuts on front shell
C00= Riveted #4-40 UNC open nuts on rear shell
I00= Riveted #4-40 UNC ground tabs with Ø3.2mm holes
I10= Riveted #4-40 UNC ground tabs with board locks(standard)

Mounting Style

Code		Code		Code		Code		Code	
000		B00		C00		I00		I10	
DIM. L= 4.0mm		DIM. L= 4.0mm		DIM. L= 4.0mm		ØA=3.2mm			

Lead Free Process

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: C3W3 COAXIAL FEMALE D-SUB CONNECTOR (RIGHT ANGLE BOARD MOUNT TYPE)		MATERIAL:		FINISH:		DRAWING NO. C3W306SC		PART NO. C3W3SCH*0*****0	
3					DRAWN BY: Karen	3/20-17'										
2					ENGINEER: Sun	3/20-17'	TOLERANCE UNLESS OTHERWISE SPECIFIED		.X ± 0.30/.012 X' ± .1'		.XX ± 0.20/.008 .X' ± .01		SCALE 2 / 1		SHEET 1 OF 1	
1	Karen	3/3-17'	ECNT117049/ECRT117003		CHECKED BY: Eisley	3/22-17'										
SYM	NAME	DATE	REVISIONS		APPROVED BY: Eisley	3/22-17'	.XXX ± 0.10/.004 .XX' ± .01									



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.