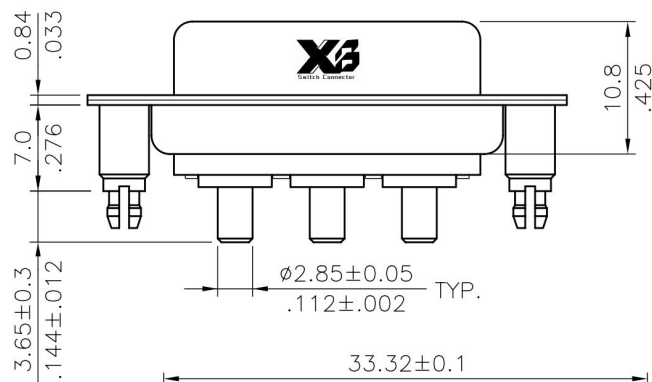
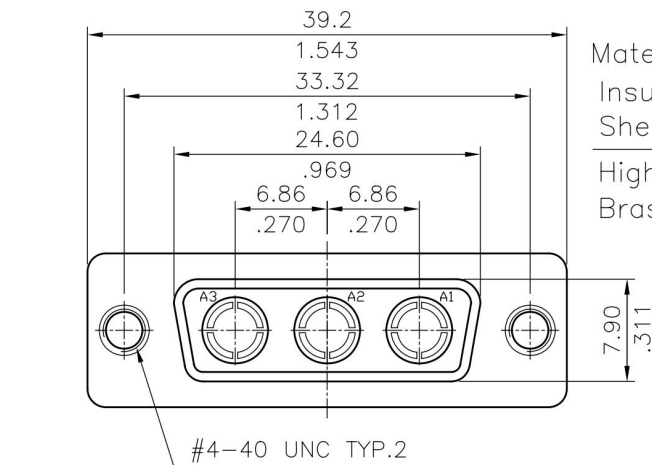


Recommended P.C Board Layout

Material:

Insulator: Glass filled Polyester UL 94V-0

Shell: Steel, Tin plated as standard

High power Contact :

Brass with Gold plated

Ordering Code

C3W3 S P V 3 0 1 20 D00
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type: S= Receptacle
- ③ Contact type: P= High Power Contact
- ④ Contact tail style: V= Straight Dip type
- ⑤ High power contact plating:

2= Gold flash plated over Nickel

3= 15μ" Gold plated over Nickel

4= 30μ" Gold plated over Nickel

5= 50μ" Gold plated over Nickel

- ⑥ Singal contact plating:

0= Without singal contact

- ⑦ Insulator color: 1= Black, 6= Green

- ⑧ Performance: 20= 20A

- ⑨ Mounting Style:

000= With Ø3.05mm holes on shell

B00= Riveted #4-40 UNC open nuts on front shell

C00= Riveted #4-40 UNC open nuts on rear shell

D00= Riveted #4-40 UNC ground stand-off on rear shell(standard)

Mounting Style

RoHS Compliant

Code	000	Code	B00	Code	C00	Code	D00
	DIM. L= 4.0mm		DIM. L= 4.0mm		DIM. L= 4.0mm		DIM. L= 7.0mm

4					DATE	UNIT: mm / inch		TITLE: C3W3 20A HIGH POWER FEMALE D-SUB CONNECTOR (TOP ENTRY BOARD MOUNT TYPE)	X3 Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
3				DRAWN BY:	Rita	10/18-01'	TOLERANCE UNLESS OTHERWISE SPECIFIED			
2				ENGINEER:	David	10/18-01'	.X ± 0.30/.012	X' ± 1'		MATERIAL:
1				CHECKED BY:	David	10/18-01'	.XX ± 0.20/.008	.X' ±		FINISH:
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	10/18-01'	.XXX ± 0.10/.004	.XX' ±		
DRAWING NO.		C3W308SB		PART NO.		C3W3SPV*0*20*00				
SCALE		2 / 1		SHEET		1 OF		1		