


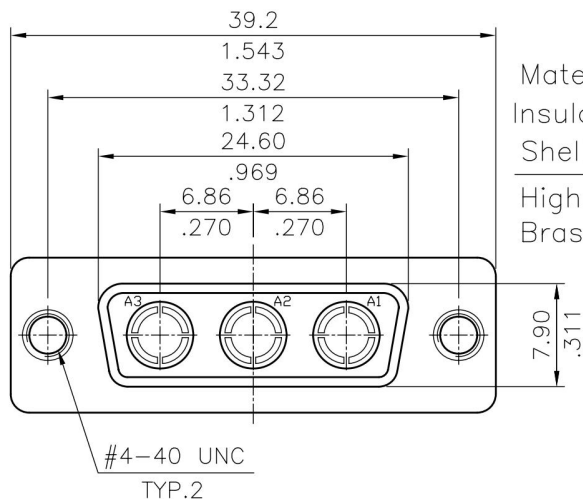

Material:

Insulator: Glass filled Polyester UL 94V-0

Shell: Steel, Tin plated as standard




High power Contact :

Brass with Gold plated

Ordering Code

C3W3 S P V 3 0 1 40 D00
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type: S= Receptacle
- ③ Contact type: P= High Power Contact
- ④ Contact tail style: V= Straight Dip type
- ⑤ High power contact plating:
2= Gold flash plated over Nickel
3= 15μ" Gold plated over Nickel
4= 30μ" Gold plated over Nickel
5= 50μ" Gold plated over Nickel
- ⑥ Singal contact plating:
0= Without singal contact
- ⑦ Insulator color: 1= Black, 6= Green
- ⑧ Performance: 40= 40A
- ⑨ Mounting Style:
000= With ø3.05mm holes on shell
B00= Riveted #4-40 UNC open nuts on front shell
C00= Riveted #4-40 UNC open nuts on rear shell
D00= Riveted #4-40 UNC ground stand-off on rear shell(standard)

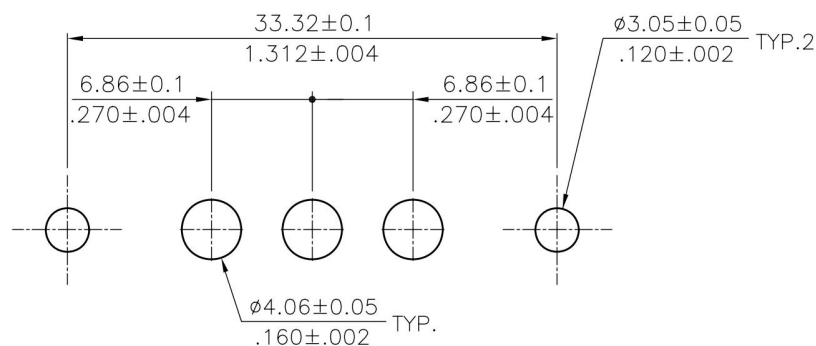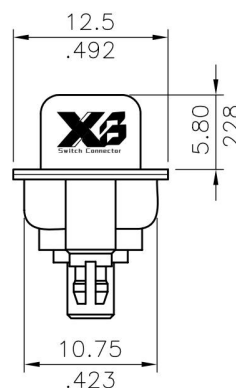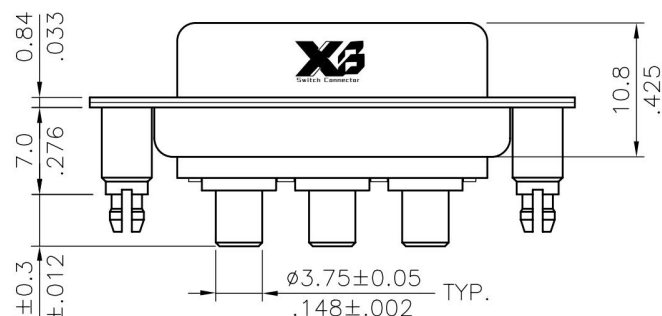

Recommended P.C Board Layout

Mounting Style

Code	000	Code	B00	Code	C00	Code	D00
DIM. L= 4.0mm		DIM. L= 4.0mm		DIM. L= 4.0mm		DIM. L= 7.0mm	

RoHS Compliant

4					DATE	UNIT: mm / inch
3				DRAWN BY: Rita	10/18-01'	TOLERANCE UNLESS OTHERWISE SPECIFIED
2				ENGINEER: David	10/18-01'	.X ± 0.30/.012 X' ± 1"
1				CHECKED BY: David	10/18-01'	.XX ± 0.20/.008 X' ±
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	10/18-01'	.XXX ± 0.10/.004 XX' ±

TITLE: C3W3 40A HIGH POWER FEMALE
D-SUB CONNECTOR (TOP ENTRY
BOARD MOUNT TYPE)

MATERIAL:

FINISH:



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DRAWING NO.	C3W310SB	PART NO.	C3W3SPV*0*40***
SCALE	2 / 1	SHEET	1 OF 1