


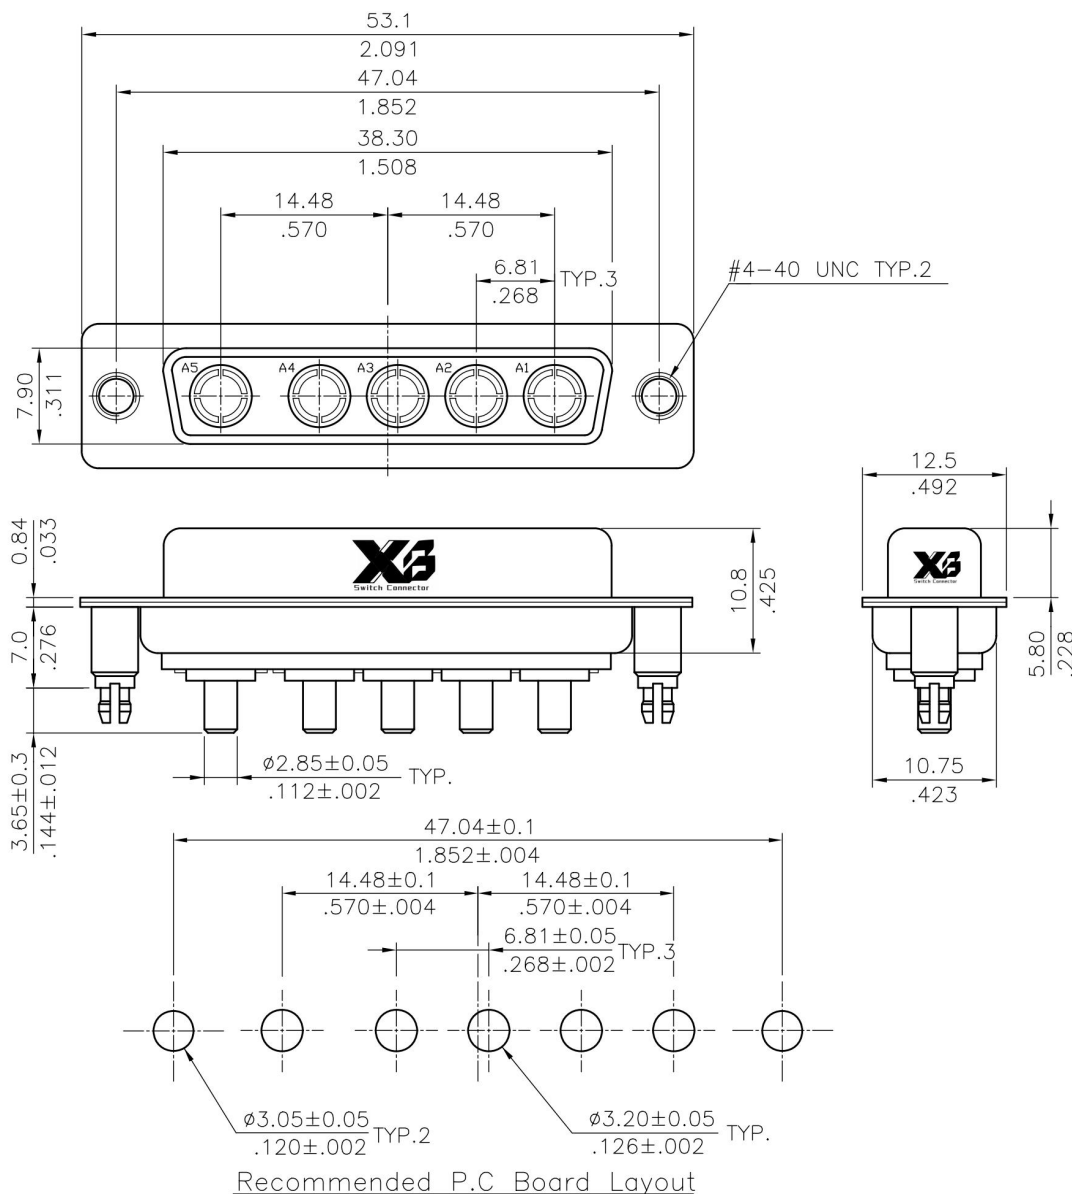

Material:

Insulator: Glass filled Polyester UL 94V-0

Shell: Steel, Tin plated as standard

High power Contact : Brass with Gold plated

Ordering Code

C5W5 P P V 3 0 1 20 D00
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type: P= Plug
- ③ Contact type: P= High Power Contact
- ④ Contact tail style: V= Straight Dip type
- ⑤ High power contact plating:

2= Gold flash plated over Nickel

3= 15μ" Gold plated over Nickel

4= 30μ" Gold plated over Nickel

5= 50μ" Gold plated over Nickel

- ⑥ Singal contact plating:

0= Without singal contact

- ⑦ Insulator color: 1= Black, 6= Green

- ⑧ Performance: 20= 20A

- ⑨ Mounting Style:

000= With ø3.05mm holes on shell

B00= Riveted #4-40 UNC open nuts on front shell

C00= Riveted #4-40 UNC open nuts on rear shell

D00= Riveted #4-40 UNC ground stand-off on rear shell(standard)

Mounting Style

RoHS Compliant

Code	000	Code	B00	Code	C00	Code	D00
			DIM. L= 4.0mm		DIM. L= 4.0mm		DIM. L= 7.0mm

4					DATE	UNIT: mm / inch		TITLE: C5W5 20A HIGH POWER FEMALE D-SUB CONNECTOR (TOP ENTRY BOARD MOUNT TYPE)	X3 Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.						
3				DRAWN BY:	Rita	10/18-01'	TOLERANCE UNLESS OTHERWISE SPECIFIED			MATERIAL:	DRAWING NO.	C5W508SB	PART NO.	C5W5SPV*0*20**	
2				ENGINEER:	David	10/19-01'	.X ± 0.30/.012								X' ± 1'
1				CHECKED BY:	David	10/19-01'	.XX ± 0.20/.008			X' ±	FINISH:	SCALE	2 / 1	SHEET	1 OF 1
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	10/19-01'	.XXX ± 0.10/.004	.XX ±							