


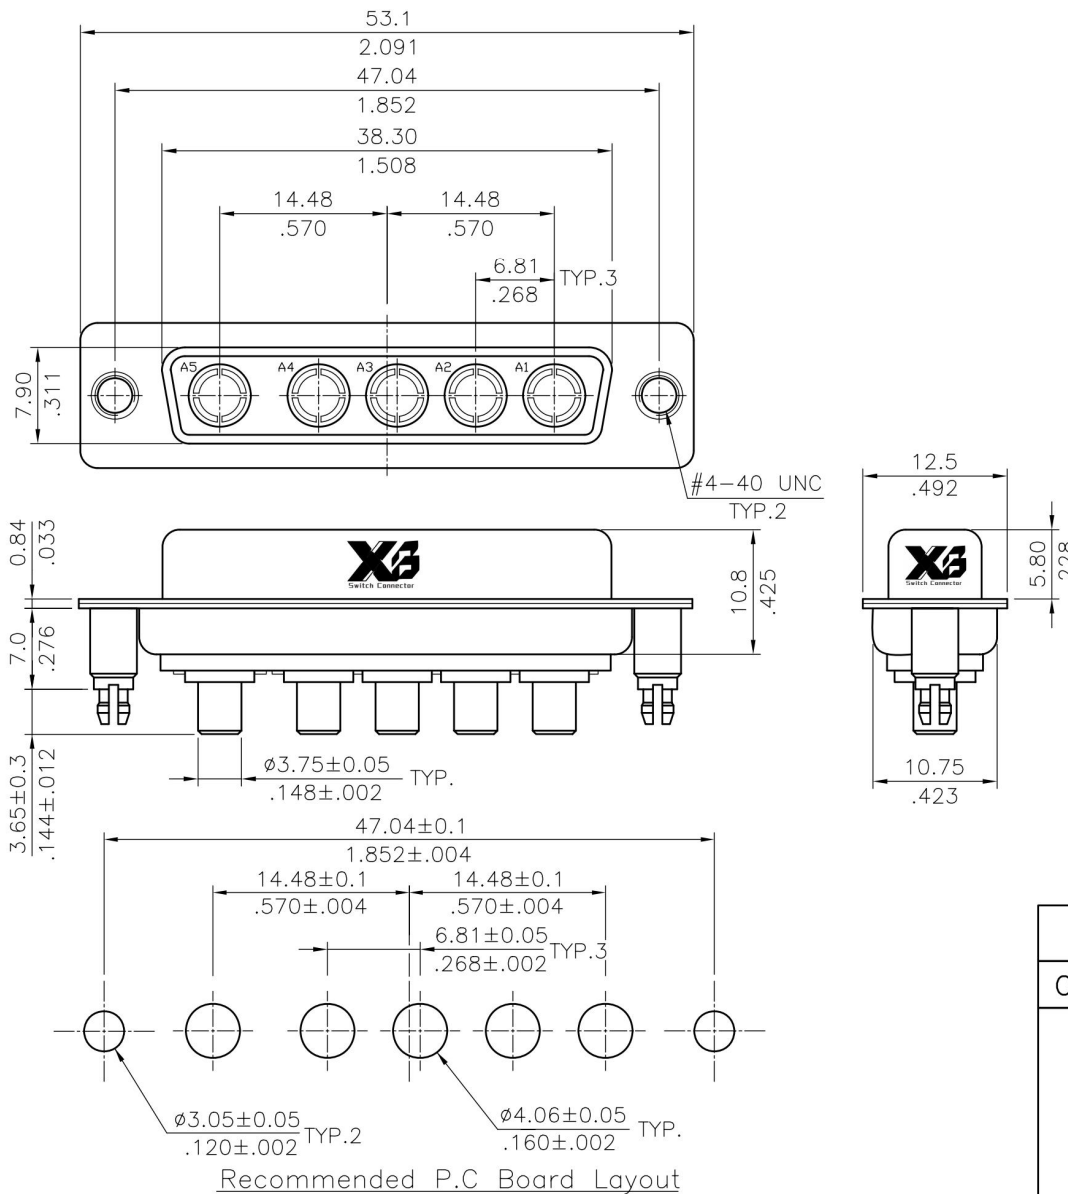

Material:

Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy

Shell: Steel, Tin plated as standard

High power Contact : Brass with Gold plated

Ordering Code

C5W5 S P V 3 0 1 40 D00
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type: S= Receptacle
- ③ Contact type: P= High Power Contact
- ④ Contact tail style: V= Straight Dip type
- ⑤ High power contact plating:
2= Gold flash plated over Nickel
3= 15μ" Gold plated over Nickel
4= 30μ" Gold plated over Nickel
5= 50μ" Gold plated over Nickel
- ⑥ Singal contact plating:
0= Without singal contact
- ⑦ Insulator color: 1= Black, 6= Green
- ⑧ Performance: 40= 40A
- ⑨ Mounting Style:
000=With ø3.05mm holes on shell
B00=Riveted #4-40 UNC open nuts on front shell
C00=Riveted #4-40 UNC open nuts on rear shell
D00=Riveted #4-40 UNC ground stand-off on rear shell(standard)

Mounting Style

RoHS Compliant

Code	000	Code	B00	Code	C00	Code	D00
			DIM. L= 4.0mm		DIM. L= 4.0mm		DIM. L= 7.0mm

4						DATE	UNIT: mm / inch		TITLE: C5W5 40A HIGH POWER FEMALE D-SUB CONNECTOR (TOP ENTRY BOARD MOUNT TYPE)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	DRAWING NO. C5W510SB PART NO. C5W5SPV*0*40***		
3				DRAWN BY: Rita	10/18-01'	TOLERANCE UNLESS OTHERWISE SPECIFIED							
2				ENGINEER: David	10/19-01'								
1				CHECKED BY: David	10/19-01'	.X ± 0.30/.012	X' ± 1'	MATERIAL:	FINISH:				
						.XX ± 0.20/.008	.X' ±						
						.XXX ± 0.10/.004	.XX' ±			SCALE	2 / 1	SHEET 1 OF 1	
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	10/19-01'								