


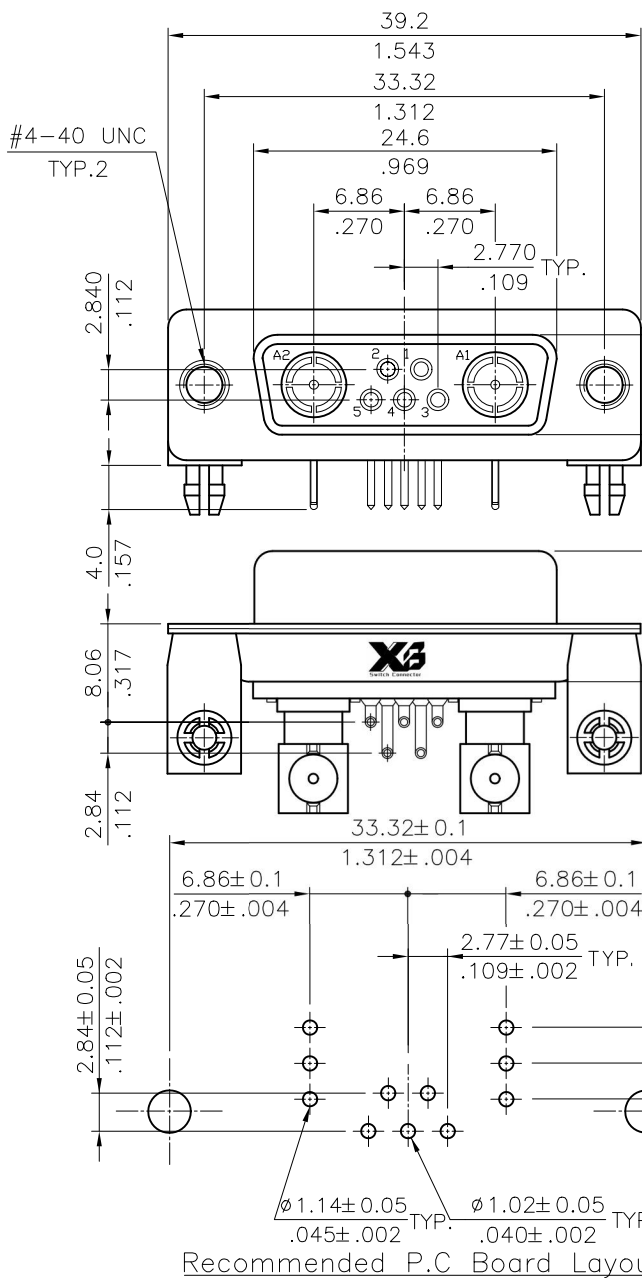

Material:

Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy

Shell: Steel, Tin plated as standard

Coaxial terminal

Insulator: Teflon UL 94V-0

Color white

Contact: Brass

Ordering Code

C7W2 S C H 3 2 1 75 I10
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① Series No.

② Connector Type: S= Receptacle

③ Contact type: C= Coaxial Contact

④ Contact tail style: H= Right Angle Dip type

⑤ Coaxial contact plating:

2= Gold flash plated over Nickel

3= 15μ" Gold plated over Nickel

4= 30μ" Gold plated over Nickel

5= 50μ" Gold plated over Nickel

⑥ Signal contact plating:

2= Gold flash plated over Nickel

3= 15μ" Gold plated over Nickel

4= 30μ" Gold plated over Nickel

⑦ Insulator color: 1= Black, 6= Green

⑧ Performance: 50= 50Ω, 75= 75Ω

⑨ Mounting Style:

000= With ø3.05mm holes on shell

B00= Riveted #4-40 UNC open nuts on front shell

C00= Riveted #4-40 UNC open nuts on rear shell

I00= Riveted #4-40 UNC ground tabs with ø3.2mm holes

I10= Riveted #4-40 UNC ground tabs

with board locks(standard)

Mounting Style

Lead Free Process

RoHS Compliant

Code	000	Code	B00	Code	C00	Code	I00	Code	I10
	DIM. L= 4.0mm		DIM. L= 4.0mm		DIM. L= 4.0mm		øA=3.2mm		

Recommended P.C Board Layout

4					DATE	UNIT: mm / inch		TITLE: C7W2 COAXIAL FEMALE D-SUB CONNECTOR (RIGHT ANGLE PCB MOUNT TYPE)	XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY:	Karen	3/20-17'	TOLERANCE UNLESS OTHERWISE SPECIFIED			MATERIAL:		
2				ENGINEER:	Sun	3/20-17'						
1	Karen	3/20-17'	ECNT117049/ECRT117003	CHECKED BY:	Eisley	3/22-17'	.X ± 0.30/.012 .XX ± 0.20/.008 .XXX ± 0.10/.004	X' ± 1' .X' ± .XX' ±	FINISH:			
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	3/22-17'						
										DRAWING NO.	C7W206SC	PART NO.
									SCALE	2 / 1	SHEET	1 OF 1