

Material:
 Insulator: Glass filled Polyester UL 94V-0
 Contact: Copper alloy
 Shell: Steel, Tin plated as standard
 High power Contact :
 Brass with Gold plated

Ordering Code

C7W2 S P V 3 2 1 40 D00
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
 ② Connector Type: S= Receptacle
 ③ Contact type: P= High Power Contact
 ④ Contact tail style: V= Straight Dip type
 ⑤ High power contact plating:

2= Gold flash plated over Nickel
 3= 15μ" Gold plated over Nickel
 4= 30μ" Gold plated over Nickel
 5= 50μ" Gold plated over Nickel

- ⑥ Singal contact plating:

2= Gold flash plated over Nickel
 3= 15μ" Gold plated over Nickel
 4= 30μ" Gold plated over Nickel

- ⑦ Insulator color: 1= Black, 6= Green

- ⑧ Performance: 40= 40A

- ⑨ Mounting Style:

000= With ø3.05mm holes on shell





B00= Riveted #4-40 UNC open nuts on front shell

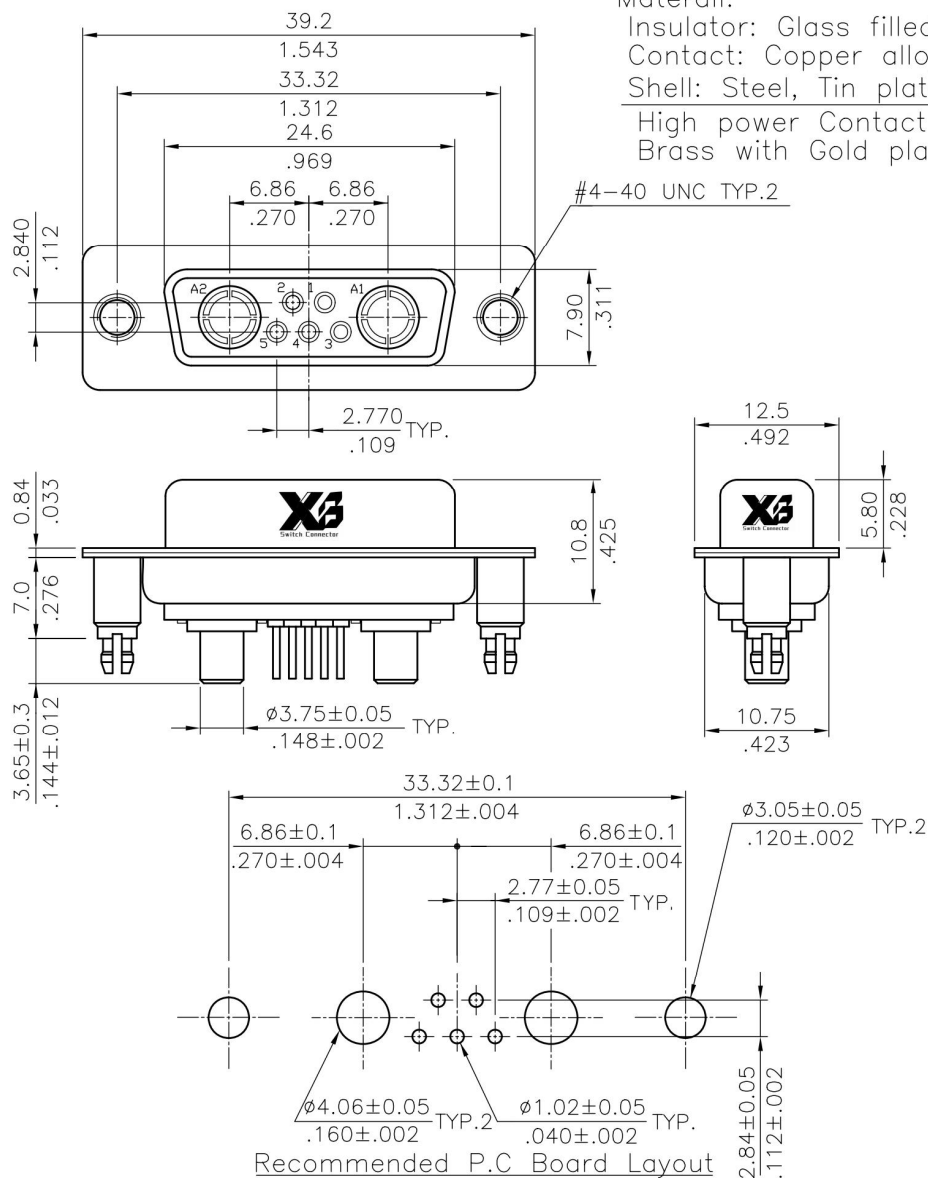
C00= Riveted #4-40 UNC open nuts on rear shell

D00= Riveted #4-40 UNC ground stand-off
 on rear shell(standard)

Mounting Style

RoHS Compliant

Code	000	Code	B00	Code	C00	Code	D00
		DIM. L= 4.0mm 	DIM. L= 4.0mm 	DIM. L= 7.0mm 			



4					DATE	UNIT: mm / inch	TITLE: C7W2 40A HIGH POWER FEMALE D-SUB CONNECTOR (TOP ENTRY BOARD MOUNT TYPE)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY: Rita	10/18-01'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:				
2				ENGINEER: David	10/19-01'	.X ± 0.30/.012 X' ± 1'	FINISH:	DRAWING NO.	C7W210SB	PART NO.	C7W2SPV***40*00
1				CHECKED BY: David	10/19-01'	.XX ± 0.20/.008 X' ±		SCALE	2 / 1	SHEET	1 OF 1
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	10/19-01'	.XXX ± 0.10/.004 XX' ±					