
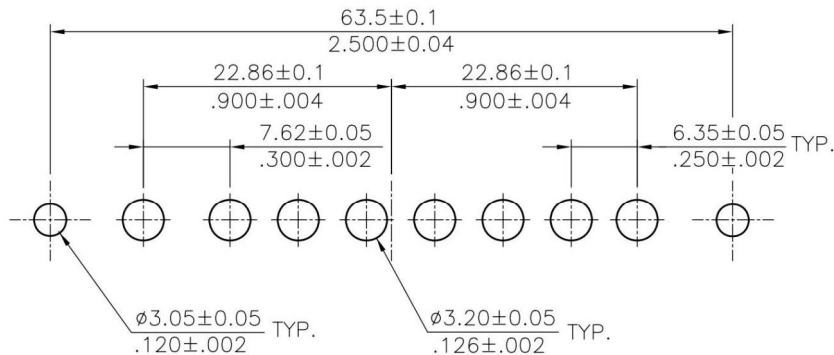

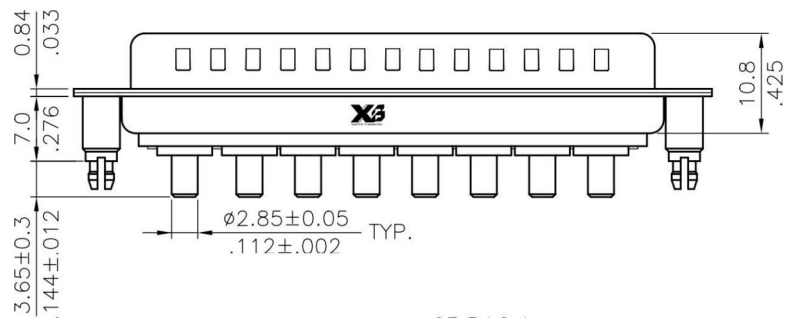


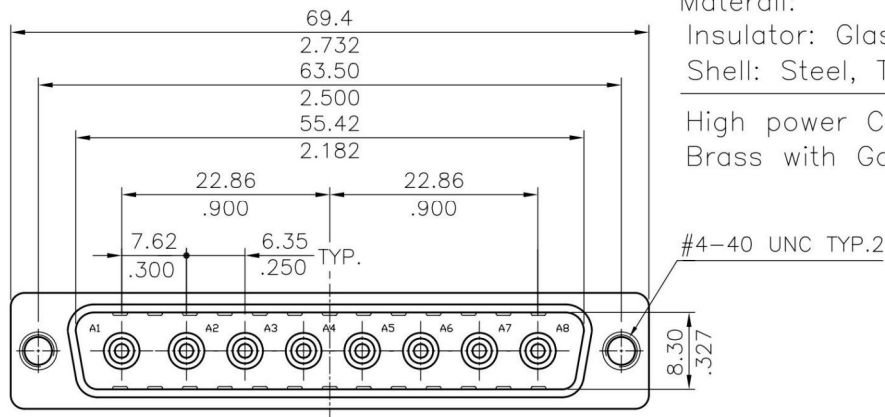

Ordering Code

C8W8 P P V 3 0 1 20 D00
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type: P= Plug
- ③ Contact type: P= High Power Contact
- ④ Contact tail style: V= Straight Dip type
- ⑤ High power contact plating:
2= Gold flash plated over Nickel
3= 15μ" Gold plated over Nickel
4= 30μ" Gold plated over Nickel
5= 50μ" Gold plated over Nickel
- ⑥ Singal contact plating:
0= Without singal contact
- ⑦ Insulator color: 1= Black, 6= Green
- ⑧ Performance: 20= 20A
- ⑨ Mounting Style:
000= With $\phi 3.05$ mm holes on shell
B00= Riveted #4-40 UNC open nuts on front shell
C00= Riveted #4-40 UNC open nuts on rear shell
D00= Riveted #4-40 UNC ground stand-off on rear shell(standard)

Mounting Style

RoHS Compliant

Code	000	Code	B00	Code	C00	Code	D00
DIM. L= 4.0mm		DIM. L= 4.0mm		DIM. L= 4.0mm		DIM. L= 7.0mm	

4					DATE	UNIT: mm / inch	TITLE: C8W8 20A HIGH POWER MALE D-SUB CONNECTOR (TOP ENTRY BOARD MOUNT TYPE)	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
3				DRAWN BY: Rita	10/18-01'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:		
2				ENGINEER: David	10/19-01'	.X $\pm 0.30/.012$ X' $\pm 1'$	FINISH:	DRAWING NO. C8W807SB	PART NO. C8W8PPV*0*20*00
1				CHECKED BY: David	10/19-01'	.XX $\pm 0.20/.008$ X' $\pm$		SCALE 2 / 1	SHEET 1 OF 1
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	10/19-01'	.XXX $\pm 0.10/.004$ XX' $\pm$			