
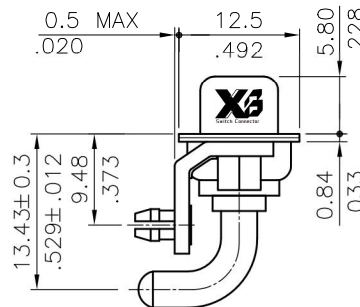


Ordering Code

C8W8	S	P	H	3	0	1	40	110
<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>
①	②	③	④	⑤	⑥	⑦	⑧	⑨

- ① Series No.
- ② Connector Type: S= Receptacle
- ③ Contact type: P= High Power Contact
- ④ Contact tail style: H= Right Angle Dip type
- ⑤ High power contact plating:
 - 2= Gold flash plated over Nickel
 - 3= 15 μ " Gold plated over Nickel
 - 4= 30 μ " Gold plated over Nickel
 - 5= 50 μ " Gold plated over Nickel
- ⑥ Signal contact plating:
 - 0= Without signal contact
- ⑦ Insulator color: 1= Black, 6= Green
- ⑧ Performance: 40= 40A
- ⑨ Mounting Style:
 - 000= With ϕ 3.05mm holes on shell
 - B00= Riveted #4-40 UNC open nuts on front shell
 - C00= Riveted #4-40 UNC open nuts on rear shell
 - I00= Riveted #4-40 UNC ground tabs with ϕ 3.2mm holes
 - I10= Riveted #4-40 UNC ground tabs with board locks(standard)

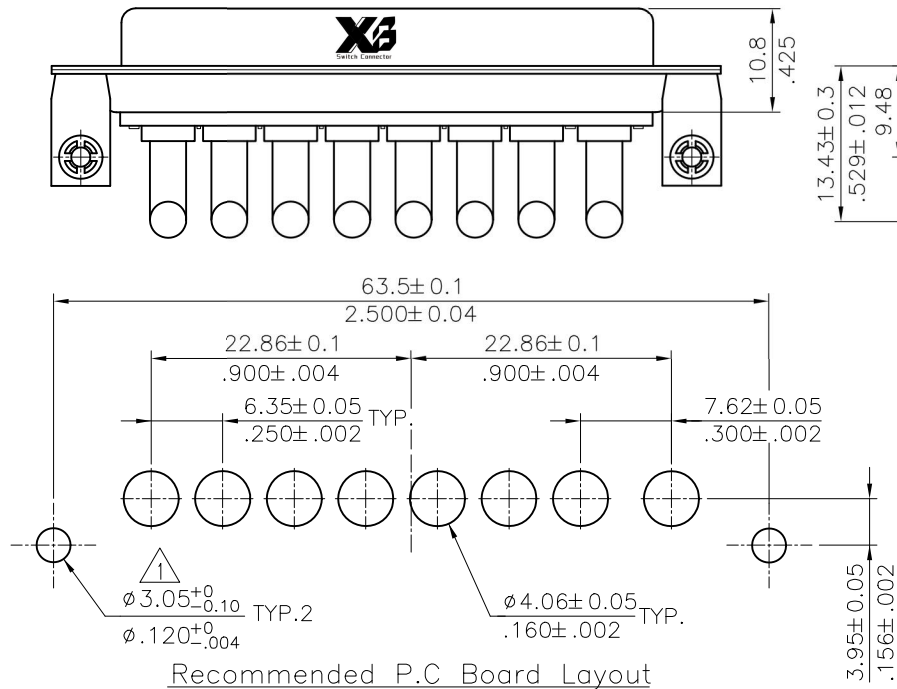

Mounting Style

Code	000	Code	B00	Code	C00	Code	I00	Code	I10
		DIM. L= 4.0mm 		DIM. L= 4.0mm 		$\phi A=3.2mm$ 			

4						DATE	UNIT: mm / inch		TITLE: C8W8 40A HIGH POWER FEMALE D-SUB CONNECTOR (RIGHT ANGLE BOARD MOUNT TYPE)	XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3	Karen	3/20-17'	ECNT117049/ECRT117003	DRAWN BY:	Karen	3/20-17'	TOLERANCE UNLESS OTHERWISE SPECIFIED				MATERIAL:	DRAWING NO.	C8W814SE
2	Jim	10/13/06'	ECR06094-0/ECN06369	ENGINEER:	Sun	3/20-17'	.X ± 0.30/.012	X* ± 1"	FINISH:	SCALE		2 / 1	SHEET
1	SUN	3/24/05'	ECR05025-0/ECN05095	CHECKED BY:	Eisley	3/22-17'	.XX ± 0.20/.008	X* ±					
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	3/22-17'	.XXX ± 0.10/.004	.XX ±					