
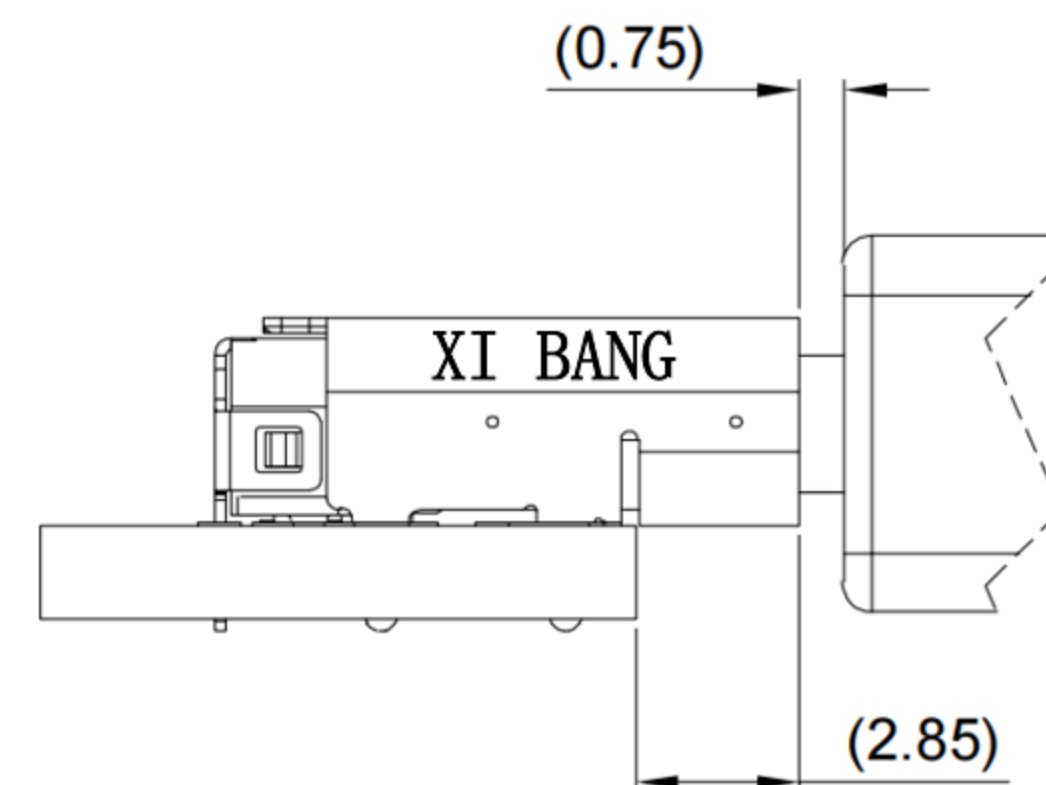
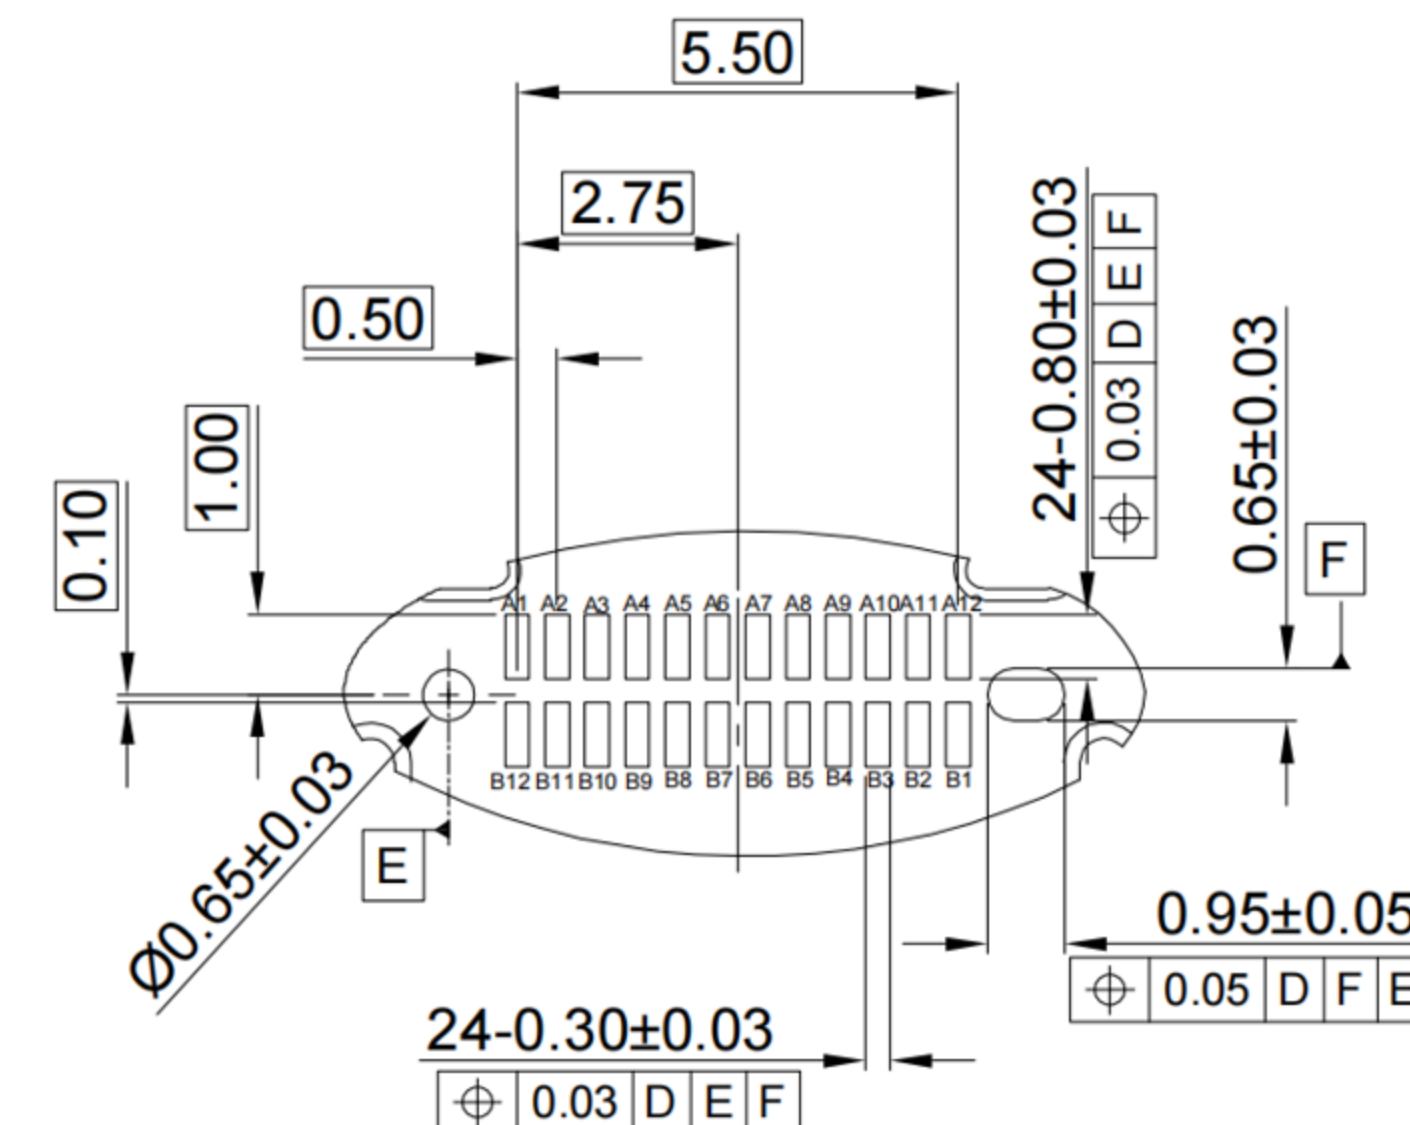


3 : 30u"

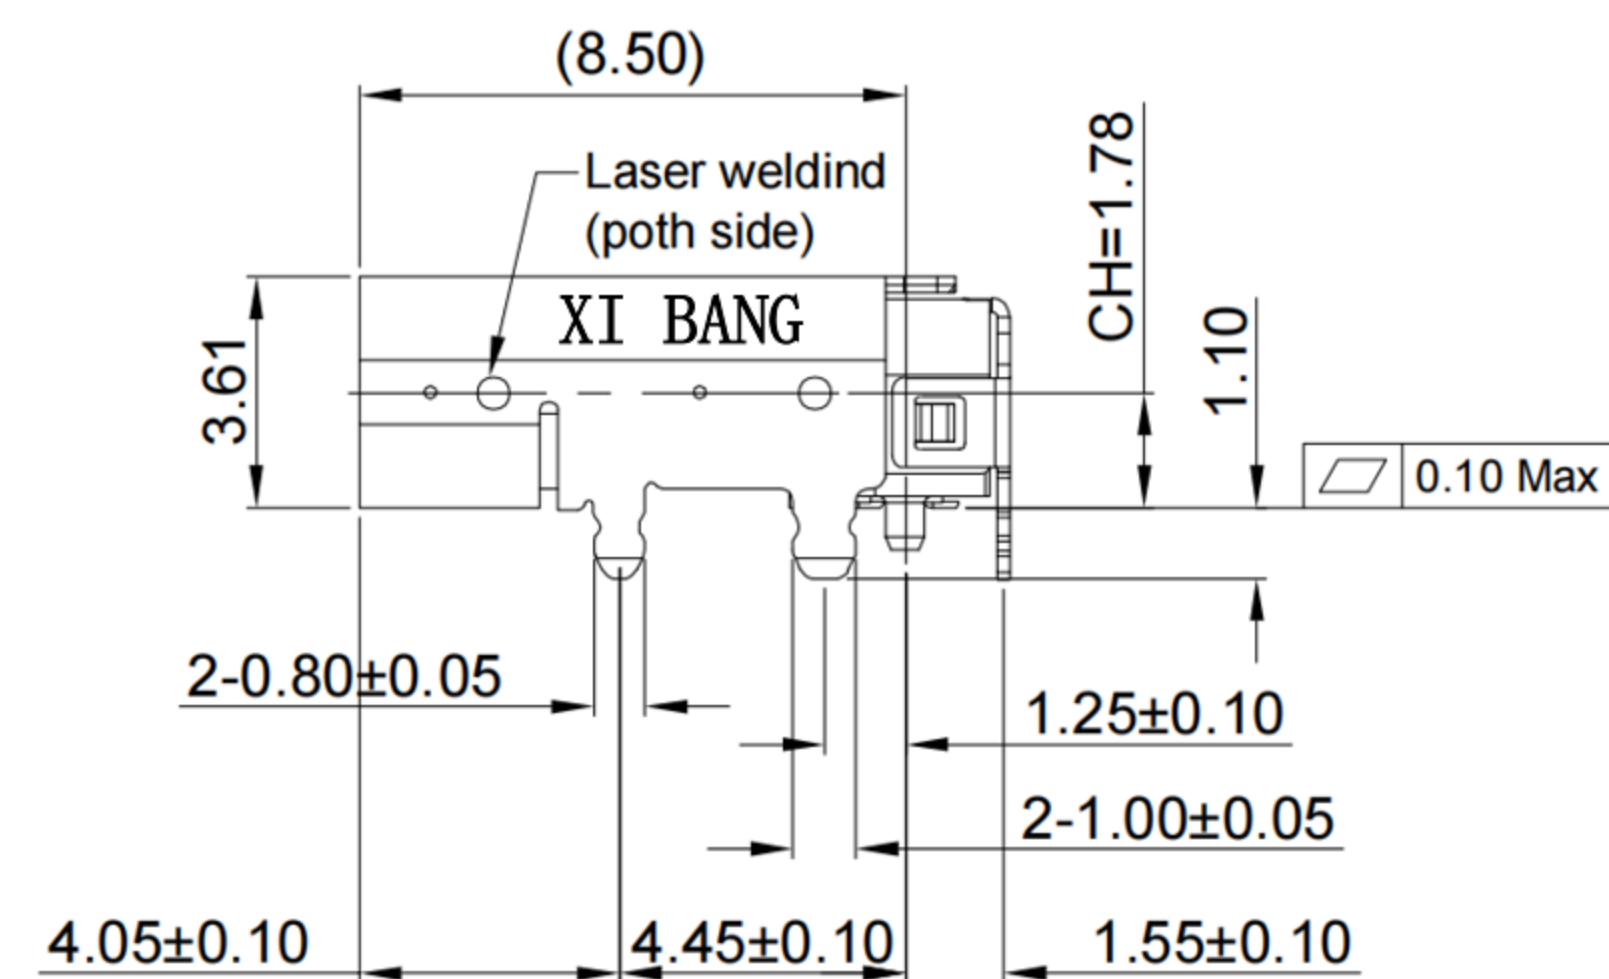


1. Rating: 5.0A (V BUS&GND), 0.25A (Other Pin)
2. Voltage rating: 12V 24V AC
3. Contact Resistance: 40 mΩ Max
4. Insulation Resistance: 100 MΩ Min
5. Dielectric Withstanding Voltage: 100V AC
6. Operating temperature: -40° C ~ +85° C
7. Waterproof grade: IP 50
8. Durability cycle: 10,000 cycles

1. Connector Mate and Unmate Force
 - 1.1 Mate force: 5~20 N .
 - 1.2 Unmate force: 8~20 N

- 1.Housing: LCP
- 2.Contact: C18400
- 3.Shell: SUS
- 4.O-ring: Silicone


1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
2.Shell: Nickel under Plated surface layer

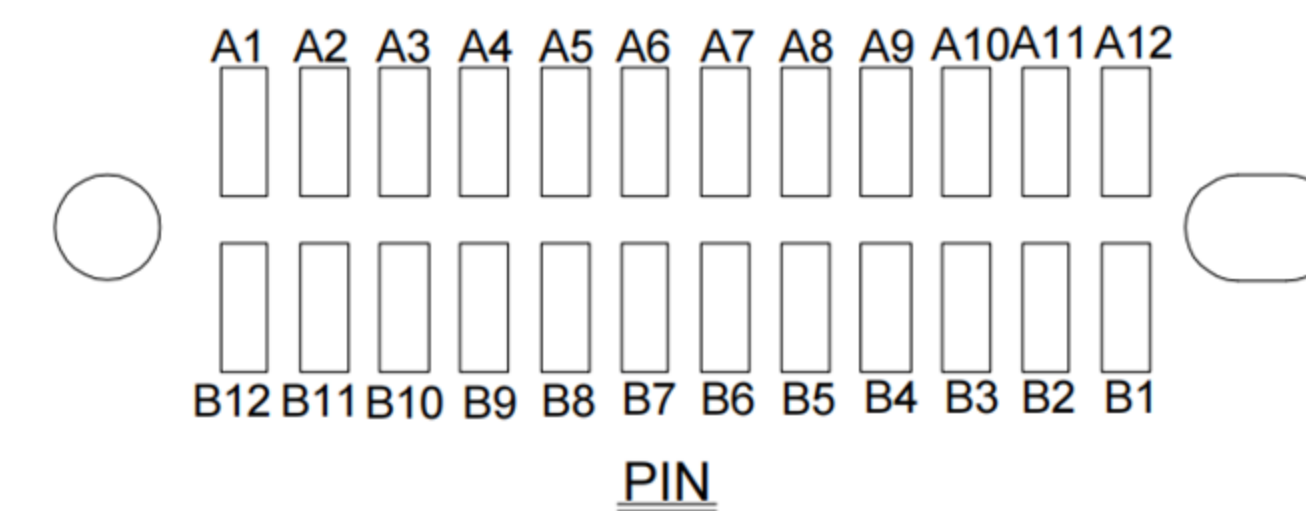[illegible]

TOLERANCE UNLESS
OTHERWISE STATED

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
Above 30 ~ 50	± 0.5
Angle	$\pm 0.3^\circ$

3RD.
ANGEL'S



MM

APPROVED BY:	DATE
Tony Kao	03/10/22

SHEET N

PART NO

CONNECTOR	Horizontal Type-c 24P Female SMT CH=1.78 L=10.15mm
-----------	---

R1

7			
1	更新圖面	Jack	031022
ITEM NO.	DESCRIPTION	DRAWN	DATE