




Rating	3A DC48V	Electrical Life	30,000 cycles
	3A 125VAC		10,000 cycles
Contact Resistance	100mΩ Max	Mechanical Life	300,000 cycles
Insulation Resistance	>100MΩ DC500V	Ambient Temper. Used	-25℃ to +85℃
Withstand Voltage	AC500V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	150gf max
说明	利用橡胶封装的密封结构实现防尘防水（IEC IP67）端子部分除外。		

8	密封垫	1	TPE	
7	密封帽	1	硅胶	
6	端子	3	C2680	镀银
5	触点	3	银合金	
4	按钮	1	PBT UL94 V0	
3	弹片	1	C17200	进口镀铜
2	盖片	1	PA66 UL94 V0	
1	底座	1	PBT UL94 V0	
序号	零件名称	数量	材质	备注

制 图 DRAWIN	高鹏			东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.									
设 计 DESIGN	阮寬展												
审 核 CHECKED	路建宏		比 例 SCALE	4:1	名 称 TITLE	DP系列 密封型 超小型 微动开关							
核 准 APPROVE	阮寬展		张 数 SHEET	1/1	料 号 P/N NO.	XB-DPE-D-00N2							
一般公差 TOLERANCE		±0.20	单 位 UNIT	mm	模具编号 P/N NO.								
		±0.15											
		±0.10	角 度 ANGLES	±2.0°					纸 张 SIZE	A4	角 法 P R O J.		工 程 圖 ENG DRAW
		±0.05											

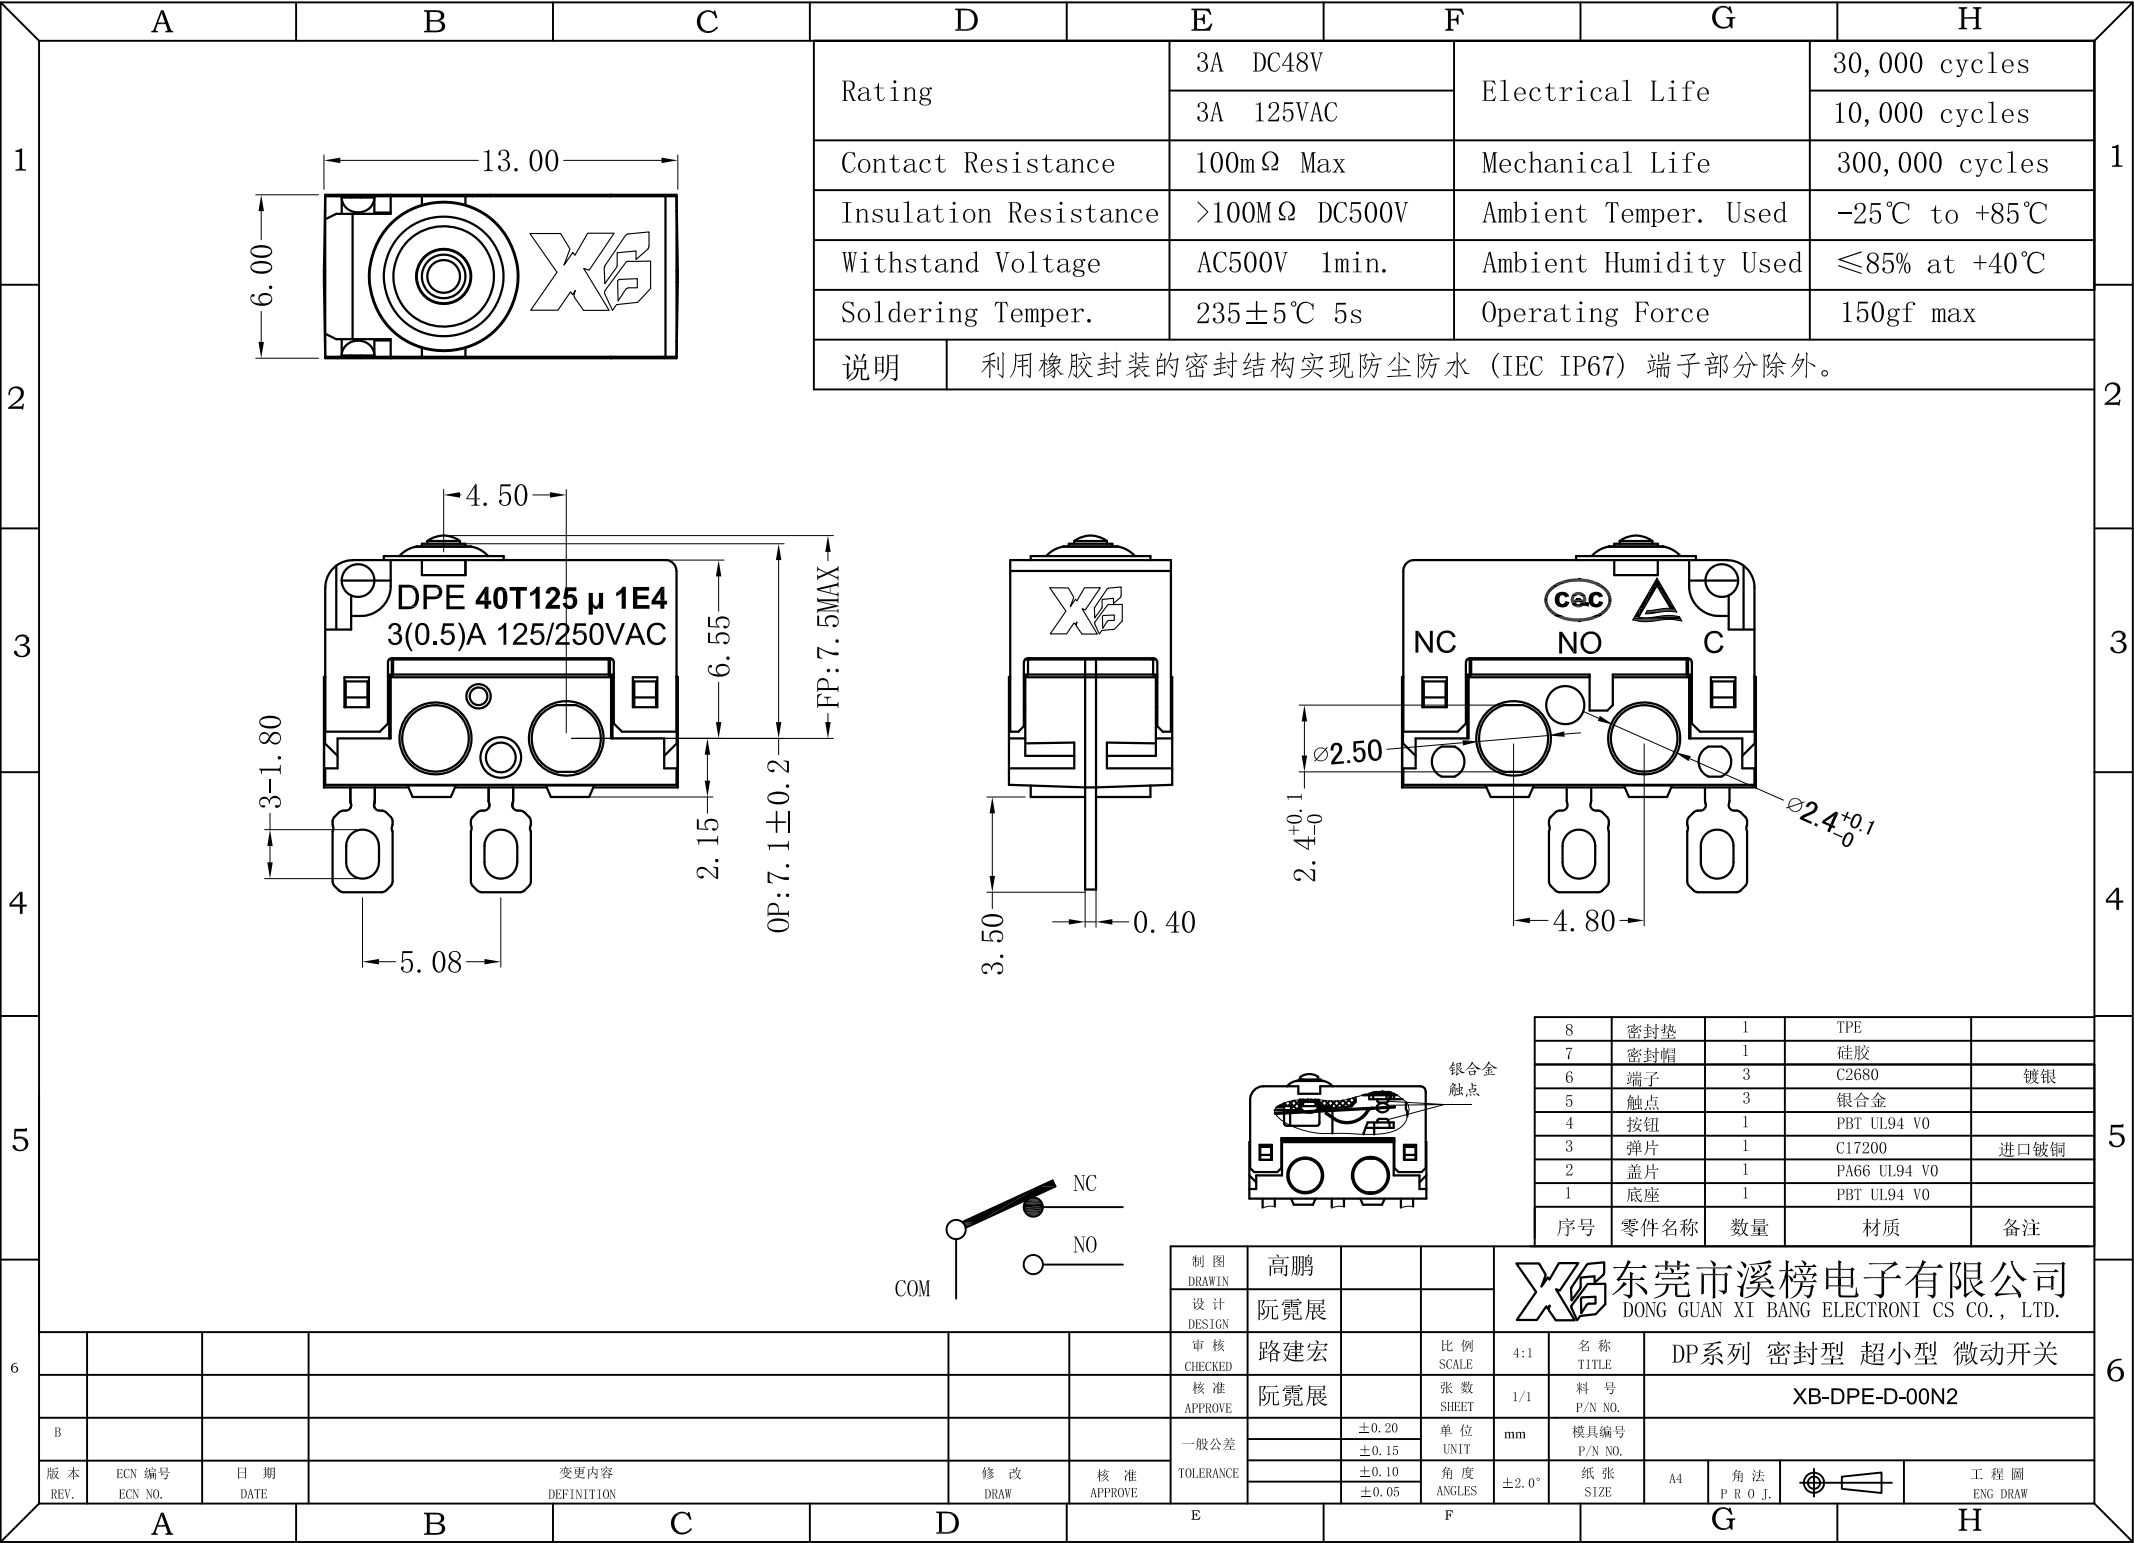