
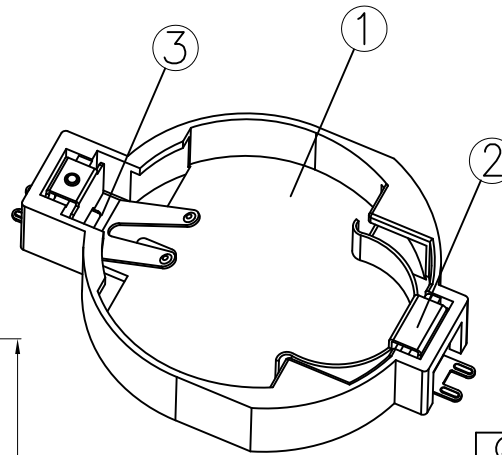
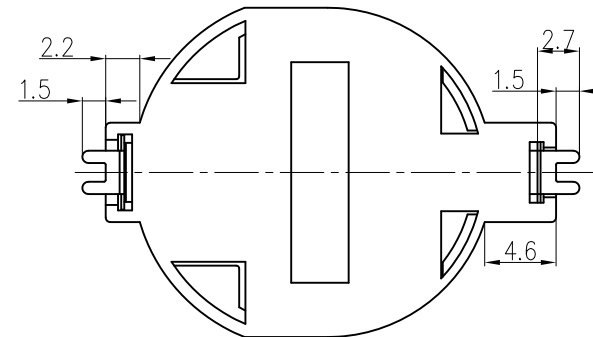
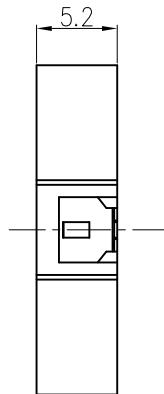


RoHS


REVISIONS

LTR	DESCRIPTION	DATE	REVISED	APPROVED
-----	-------------	------	---------	----------

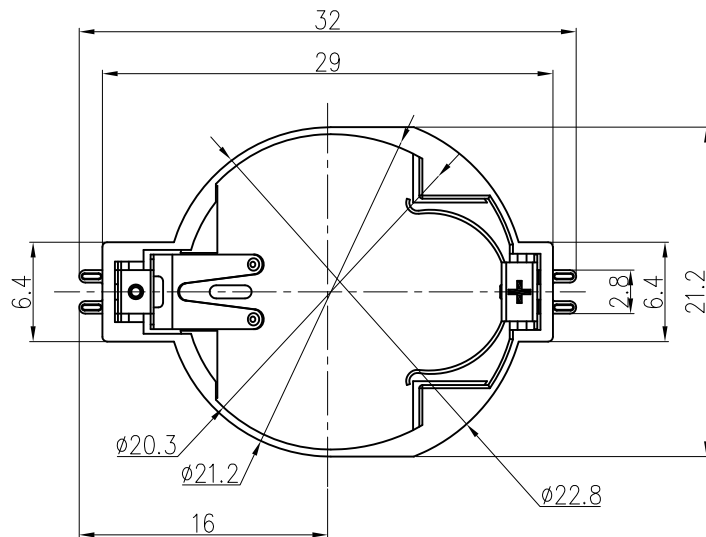

Performance:

1. Rated current: 2.0A;
2. Voltage rating: 12V;
3. Withstand voltage: 500V;
4. Contact resistance: < 30 mΩ;
5. Insulation resistance: 500 MΩ;
6. Operating Temperature: -40°C ~ 85°C;
7. *Key control dimensions.

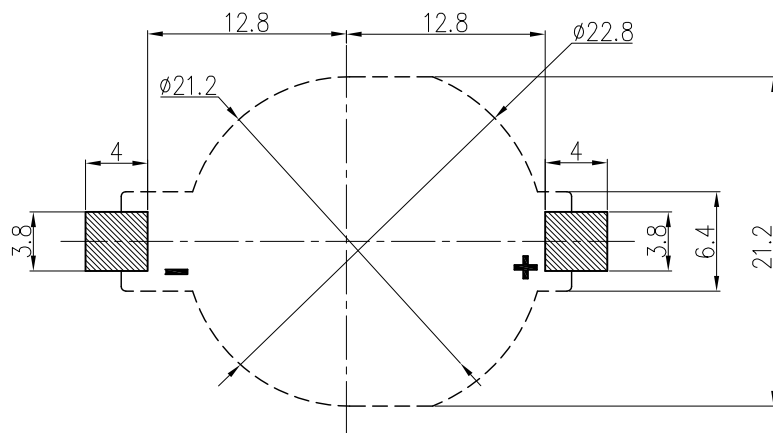

RECOMMENDED PCB LAYOUT
TOP VIEW(TOLERANCE:±0.05)

③	NEGATIVE SHRAPNEL	1	C5191	MB: NiAu/NiAg
②	POSITIVE SPRING	1	C5191	MB: NiAu/NiAg
①	HOUSING	1	PBT 4830	BLACK
NO.	PART NAME	Q'TY	MATERIAL	FINISH

UNLESS OTHERWISE SPECIFIED TOLERANCES

1.GENERAL TOLERANCE	2.ANGLE TOLERANCE
X ±0.38	XX' ±3°
X.X ±0.30	X' ±2°
X.XX ±0.25	X.X' ±1°



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGNER BY:

TYPE:


The battery holder

CHECK BY:

MODEL NO:

BS-10-001T

PROJECTION:



APPROVED BY:

SCALE:1:1

UNIT: mm

VERSION: A/0

PAGE: 1/1

DATE : 2019/11/08