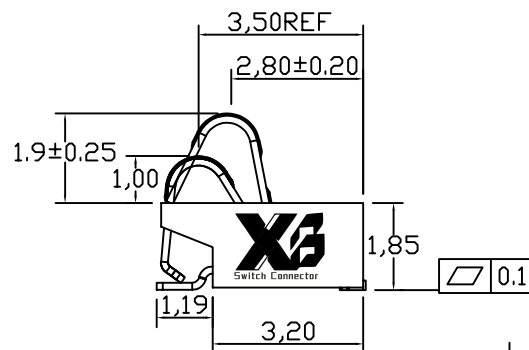
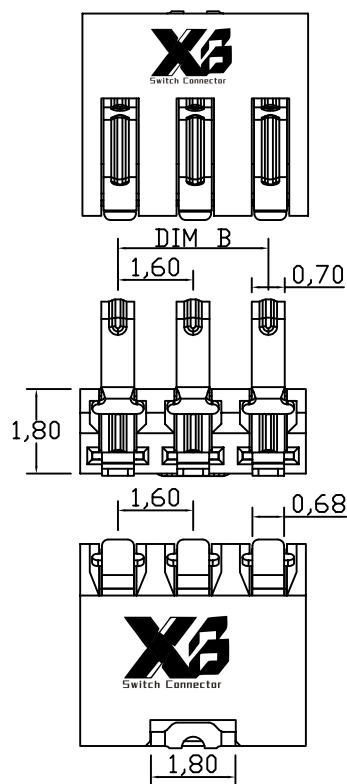


性能:

额定电流: 2.0A

额定电压: 12V

耐电压: 500V

接触电阻: 30mΩ MAX



绝缘电阻: 500MΩ

工作温度: -40℃~+85℃

塑件(材质): LCP

接触点(材质): 磷铜, 触点镀金3U",

使用寿命: 3000次以上

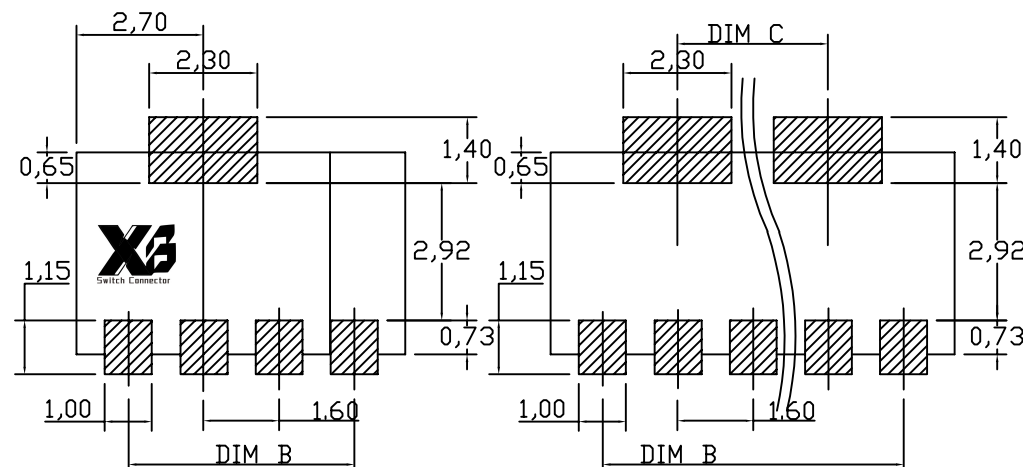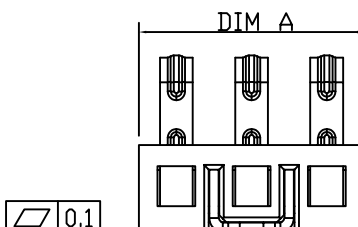


3&4PIN LAYOUT

5-10PIN LAYOUT

RECOMMENDED PCB LAYOUT

TOL:(±0.05)

XB-BC-16-10P180-R190	16.00	14.40	11.20
XB-BC-16-9P180-R190	14.40	12.80	9.60
XB-BC-16-8P180-R190	12.80	11.20	8.00
XB-BC-16-7P180-R190	11.20	9.60	6.40
XB-BC-16-6P180-R190	9.60	8.00	4.80
XB-BC-16-5P180-R190	8.00	6.40	3.20
XB-BC-16-4P180R1 90	6.40	4.80	0
XB-BC-16-3P180-R190	4.80	3.20	0
BE FILED	DIMA	DIMB	DIMC

版本REV.	更新标记REVISTONNOTE	日期DATE	未注公差 TOLERANCE	 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD	
			X. ±0.35		
			X.X ±0.25		
			X.XX ±0.15 X.XXX ±0.05		
绘制DRAWN	高鹏		视图方法 PROJECTION	品名ARTICLE: 弹片电池座连接器 Bullet Batteryholderconnector	
设计DES'D	庞东				
审核CHK'D	贺龙飞			图号MODEL: XB-BC-16系列 1.8H R1.9	
批准APPV'D	杨军		比例SCALE: 3: 1		
			单位UNIT: mm	页码SHEET: 共1页 第1页	