

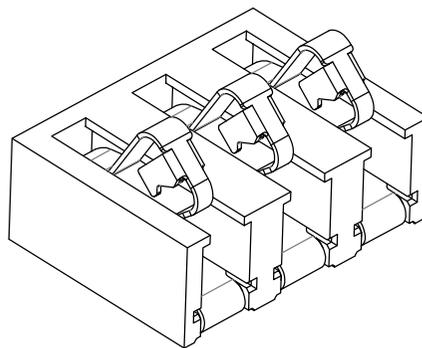

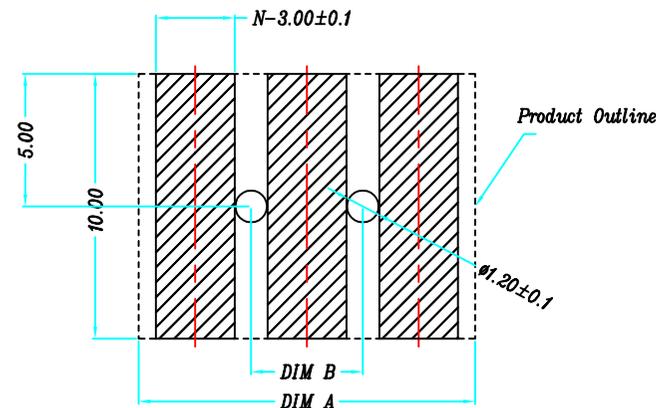
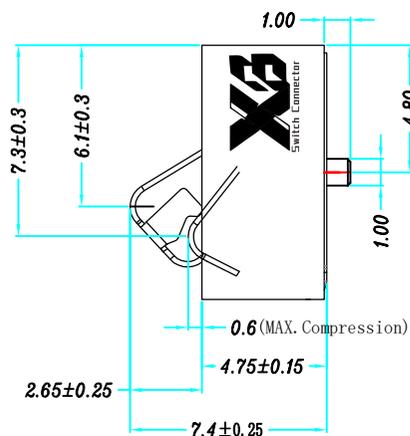


ROHS

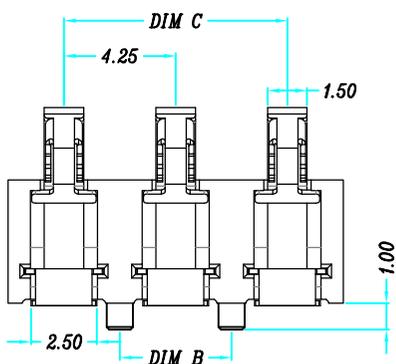

性能:

额定电流: 5.0A
 额定电压: 30V
 耐电压: 500V
 接触电阻: 30mΩ Max
 绝缘电阻: 500MΩ Min
 工作温度: -40℃~+85℃
 塑件(材质): LCP
 接触点(材质): 磷铜, 触点镀金3U"
 使用寿命: 10000次以上

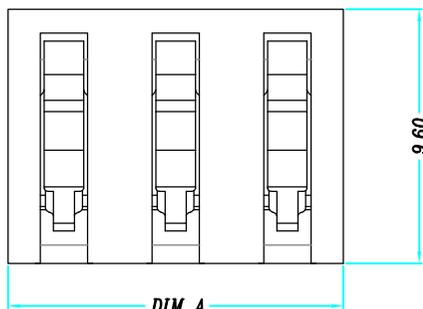

RECOMMENDED PCB LAYOUT
TOL: (±0.05)

Pin数(N)	PART NO.	DIM A	DIM B	DIM C
3Pin	XB-BC-45-3PD475	12.75	4.25	8.5
4Pin	XB-BC-45-4PD475	17.0	8.5	12.75
5Pin	XB-BC-45-5PD475	21.25	12.75	17.0
6Pin	XB-BC-45-6PD475	25.5	17.0	21.25

版本REV.	更新标记REVISION	日期DATE	未注公差 TOLERANCE	东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD
			X. ±0.35	
			X.X ±0.25	
			X.XX ±0.15	
绘制DRAWN	高鹏		X.XXX ±0.05	品名ARTICLE: 弹片电池座连接器
设计DES'D	庞东		视图方法 PROJECTION	Bullet Batteryholderconnector
审核CHK'D	贺龙飞			图号MODEL: XB-BC-45-3PD47有柱
批准APPV'D	杨军		比例SCALE:	A4
			单位UNIT: mm	页码SHEET: 共1页 第1页