


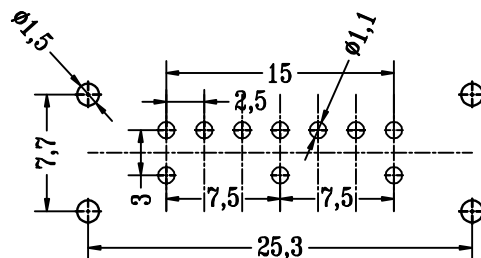
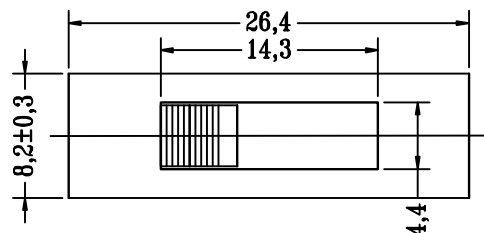


CAD FILE:

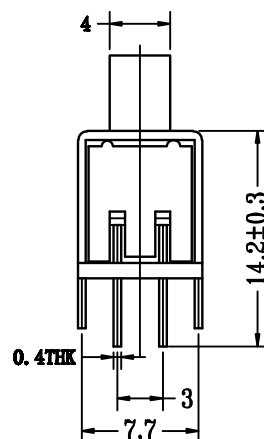

SCHEMATIC (SHORTING)

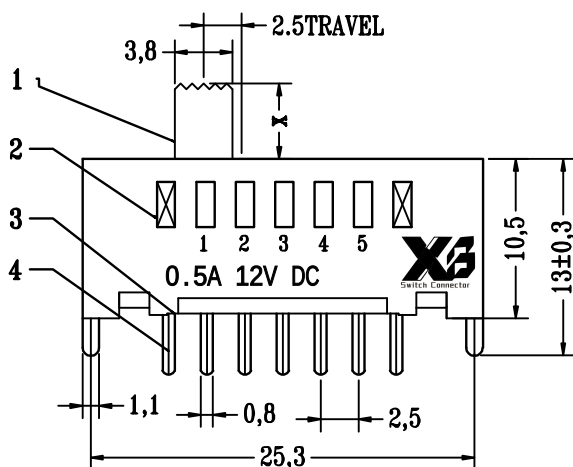

拨动开关技术参数：

1. 额定负荷: 0.5A 12V 30V DC
2. 接触阻抗: $\leq 50\text{m}\Omega$
3. 绝缘阻抗: $\geq 100\text{m}\Omega$ DC500V
4. 耐焊温度: $250\pm 5^\circ\text{C}$
5. 使用寿命: 10,000 cycles
6. 使用温度: -25 to 80
7. 使用湿度: $\leq 85\% \text{ RH}$
8. 操作力: 160gf 256gf 300gf 可定制
9. 手柄长度: 2mm-10mm 可定制

8					TOLERANCE				
7	STEEL BALL	STEEL	2	NATURAL	UNLESS SPECIFIED			初版	
6	CONTACT	BRASS STRIP	1	AG PLATED	WITHIN 1.5mm : $\pm 0.1\text{mm}$				
5	SPRING	STEEL WIRE	2	Ni PLATED	OVER 1.5mm : $\pm 0.2\text{mm}$	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	BACE	PHENOL IC RESIN	1	NATURAL	TITLE : VERTICAL SLIDE SWITCH		UNIT : mm	DRWG NO.: XB-SS-15E02	
3	TERMINAL	BRASS STRIP	10	Ag PLATED OVER Ni PLATED	MODEL: XB-SS-15E02		SCALE: 2:1	DWN.	高鹏
2	FRAME	STEEL STRIP	1	Ni PLATED	DONG GUAN XI BANG ELECTRONICS CO.,LTD			CHK'D	庞东
1	KNOB	POM	1	BLACK				APPD.	贺龙飞
NO.	PARTS	MATERIALS	Q'TY	FINISH					