

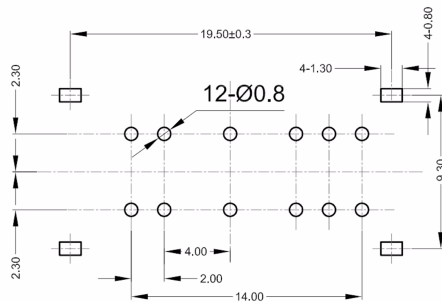
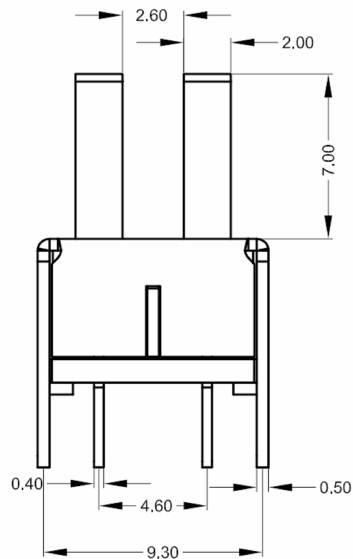


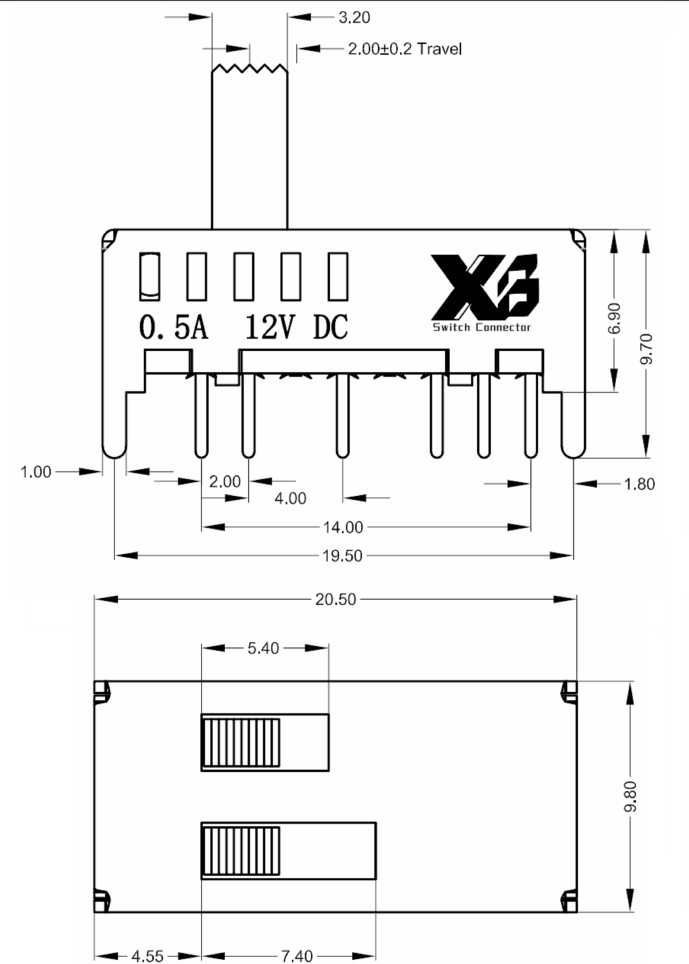

P.C.B LAYOUT
BOTTOM VIEW

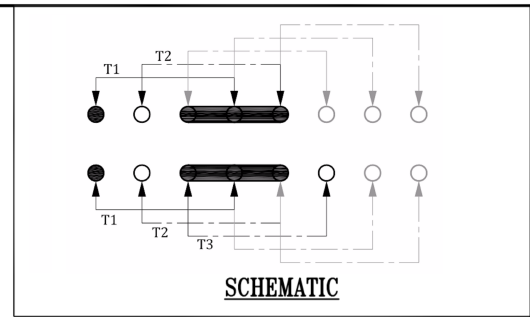

规格 Specification:

- 1.额定值 Rating:0.5A 50VDC
- 2.接触电阻 Contact resistance:≤100 mΩ
- 3.绝缘电阻 Insulation resistance:≥100 MΩ(DC500V/Min)
- 4.操作力 Operation force:300±150gf
- 5.所有材料符合Rohs要求 All materials are Rohs compliant

注：“*”表示关键尺寸 (6个)

8					TOLERANCE				
7					UNLESS SPECIFIED				
6	SPRING PLATE	SUS304	1	NATURAL	WITHIN 1.5mm : ±0.1mm	A/0	2024-5-24		
5	CONTACT CLIP	C5210R	1	Ag CLAD	OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	REMARK
4	TERMINAL	C2680R	6	Ag PLATED	TITLE : SLIDE SWITCH			UNIT : mm	DRWG XB-SS-H13Z15 1P3T+1P5T
3	BASE	PHENOLIC RESIN	1	NATURAL	MODEL: XB-SS-H13Z15 3档-5档 二合一			SCALE: 3:1	DWN. 高鹏 2024-7-8
2	FRAME	SPCC	1	Sn PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.				CHK'D 庞东 2024-7-8
1	KNOB	PA66	1	BLACK					APPD. 贺龙飞 2024-7-8
NO.	PARTS	MATERIALS	Q'TY	FINISH					