


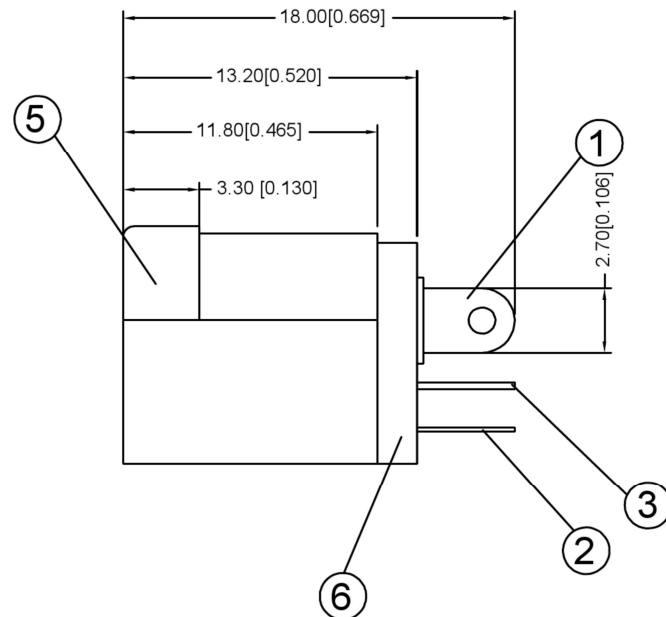



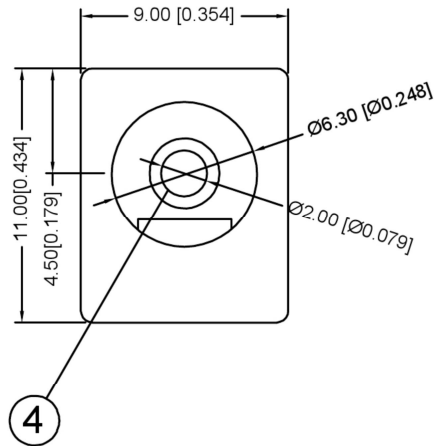

线路板按照尺寸示意图

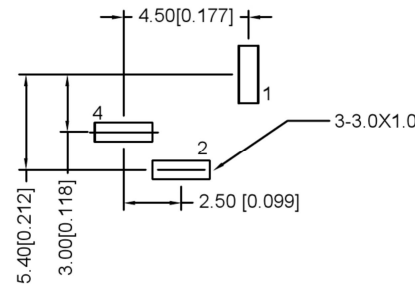

电路结构示意图

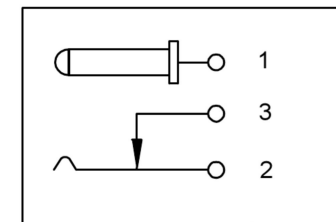

Technical requirement

技术要求

Service conditions: - 40 °C ~ 55 °C

使用条件:-40℃~55℃

Rated load: DC 30V 0.5A

额定负荷:DC 30V 0.5A

Contact resistance: ≤ 0.03 Ω

接触电阻:≤0.03Ω

Insulation resistance: ≥ 100m Ω dc250v

绝缘电阻:≥100MΩ DC250V

Withstand voltage: AC 500V (50Hz) / min

耐压:AC 500V(50Hz)/min

Plugging force: 3 ~ 20n

插拔力:3~20N

Mechanical life: 5000 times

机械寿命:5000次

							DSND		SCALE: N/A	MODEL TYPE: DC POWER JACK		
							DWN		VIEW: 	PART NO.: DC-012-2.5A-2.0		
							CHKD		UNIT: mm/in	DWG NO.:		
							APPD		SIZE: A4			
							DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISION
REVISIONS										1/1	A0	
www.alpsr.com www.gdxjdz.com www.xbswitch.com												