


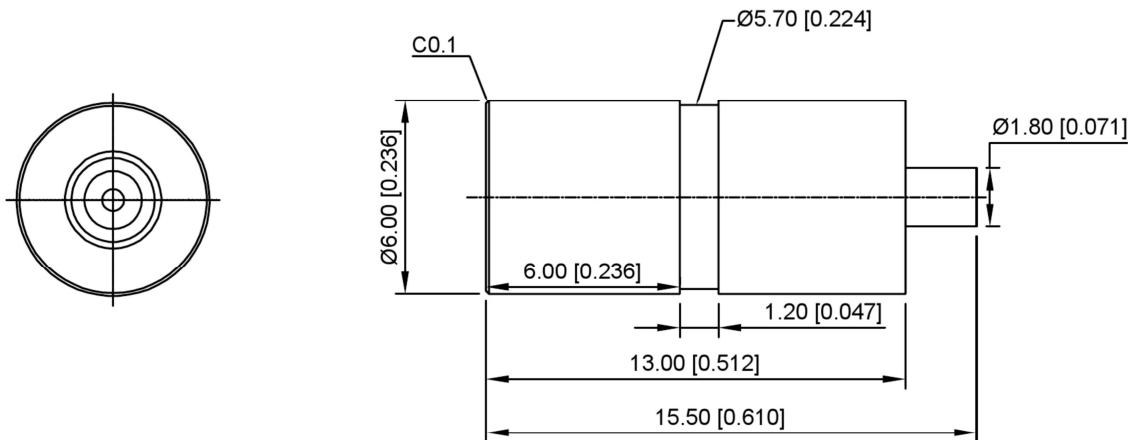

Technolo Request:

1.Outlook:

N0 burr,no hurt.

2.Electronic performance:

a:Insulation resistance:

Above DC500V/100MΩ ;

b:Endure voltage:


AC500V at 1 minute;

c:Contact resistance:

Under 30MΩ ;

3.Insertion fore & withdrawal force;0.3-3kgf.

4.Salt spray test :24H.

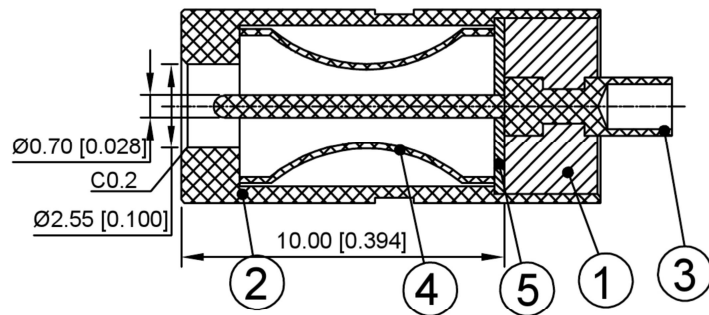

	MATERIAL	PLATING
plastic	Pbt	Black
Waterproof tube	C3604	NI
terminal	Brass	NI
Spring	phosphor bronze	NI
silicone pad		

							DSND		SCALE: N/A	MODEL TYPE: DC POWER JACK		
							DWN		VIEW: 	PART NO.: DC-F0760		
							CHKD		UNIT: mm/in	DWG NO.:		
							APPD		SIZE: A4			
REVISIONS				UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD				WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com											1/1	A0