
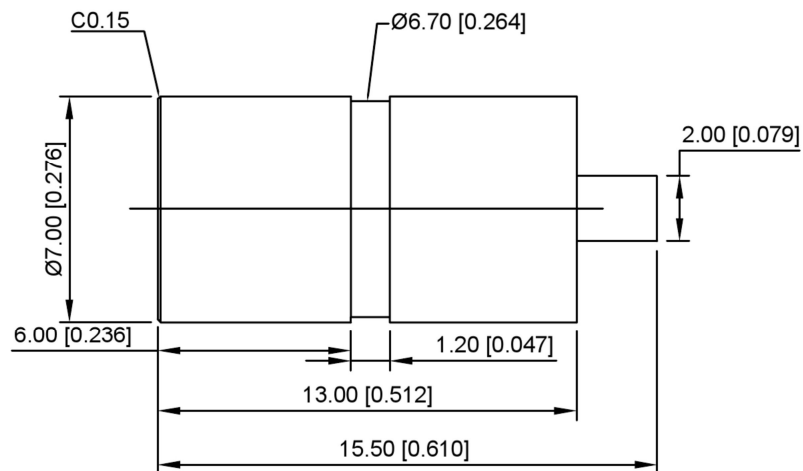




Technolo Request:

1.Outlook:

N0 burr,no hurt.

2.Electronic performance:

a:Insulation resistance:

Above DC500V/100MΩ ;

b:Endure voltage:



AC500V at 1 minute;

c:Contact resistance:


Under 30MΩ ;

3.Insertion fore & withdrawal force;0.3-3kgf.

4.Salt spray test :24H.

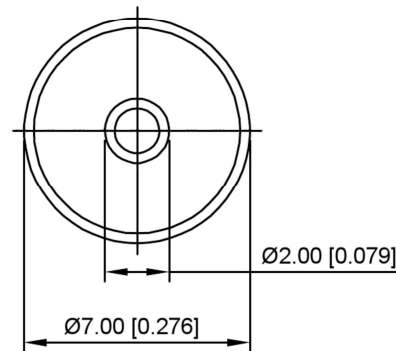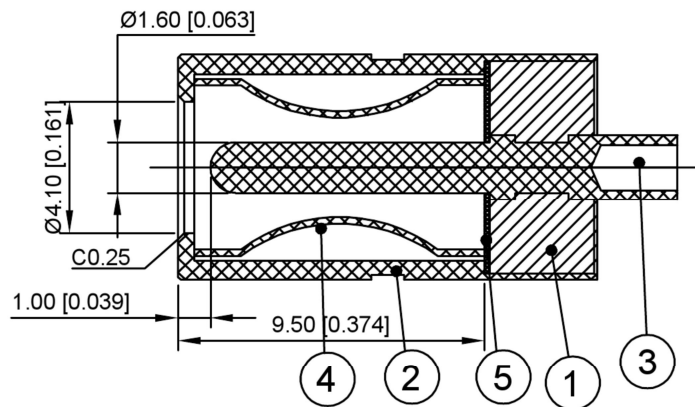

	MATERIAL	PLATING
plastic	Pbt	Black
Waterproof tube	C3604	NI
terminal	C3604	NI
Spring	phosphor bronze	NI
silicone pad		

							DSND		SCALE: N/A	MODEL TYPE: DC POWER JACK				
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: DC-F1670				
				L≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:				
				4<L≤ 16	±0.3		APPD		SIZE: A4					
				16<L≤ 63	±0.4									
				L> 63	±0.5									
				DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES							
REVISIONS												WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com													1/1	A0