

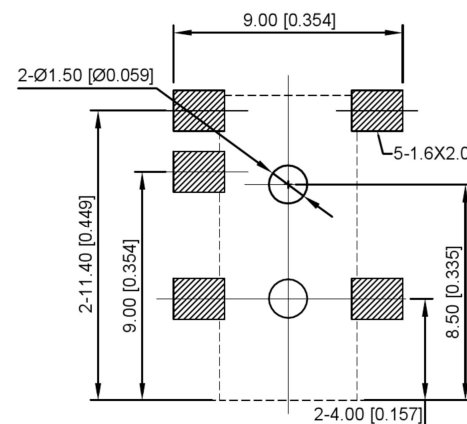
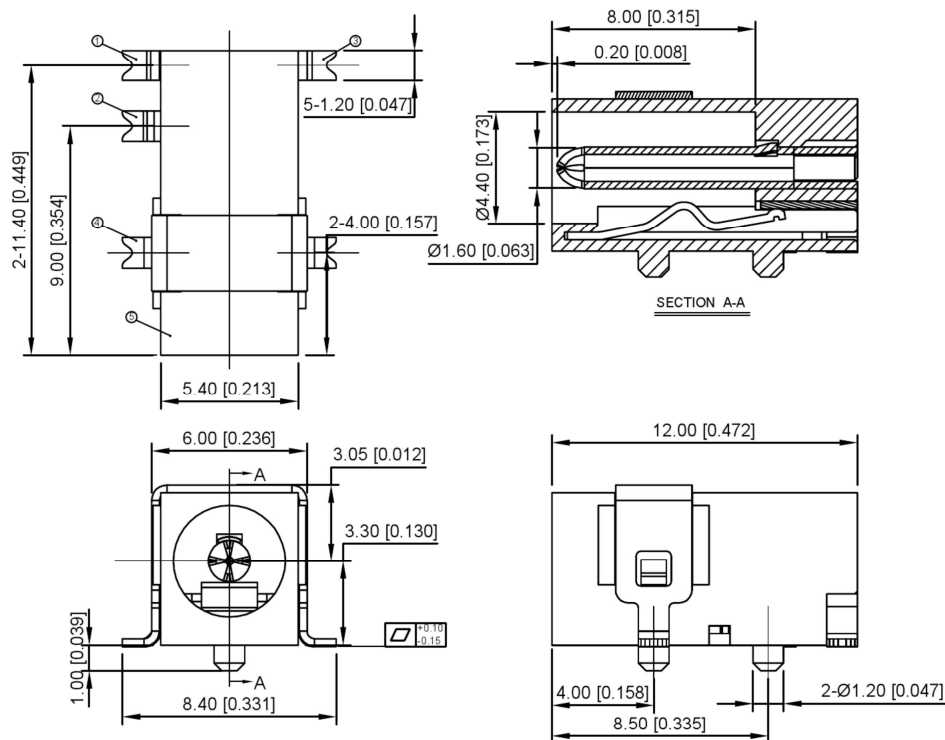




PCB LAYOUT TOP VIEW
TOLERANCES:±0.05

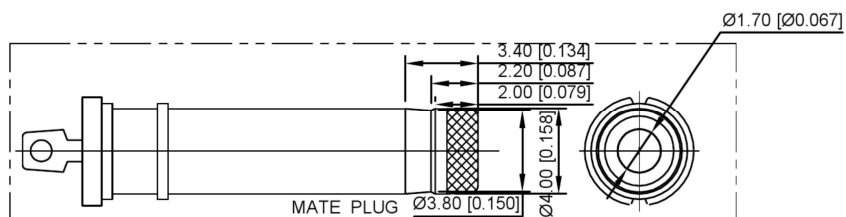

QTY	PART NAME	MATERIAL(THICK)	PLATING(COLOR)
1	HOUSING	PA9T	Black
1	TERMINAL 4#	C2680R-EH T=0.30	Ag100μ Ni 500μ"
1	TERMINAL 3#	C2680R-EH T=0.30	Ag100μ Ni 500μ"
1	TERMINAL 2#	C5210R-EH T=0.30	Ag100μ Ni 500μ"
1	TERMINAL 1#	C2680R-EH T=0.30	Ag100μ Ni 500μ"

SPECIFICATIONS:

1.ELECTRICAL CHARACTERISTICS:

1-1.RATING:12V, 4A Min.

1-2.CONTACT RESISTANCE

50 MILLIOHMS Max. FOR INITIAL,

80 MILLIOHMS Max. AFTER 5000 CYCLES

1-3.INSULATION RESISTANCE: 100 MEGAOHMS Min
BY 500V DE AFTER 1 MINUTE.

1-4.DIELECTRIC WITHSTANDING VOLTAGE:500V
RMS AFTER1 MINUTE

2.MECHANICAL CHARACTERISTICS:

2-1.INSERTION FORCE:0.3~3.0 KGF(2.94~29.4N)

2-2. WITHDRAWAL FORCE :0.3~3.0 KGF (2.94~29.4N)

3.LIFE TEST:5,000 CYCLES MIN.

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L > 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND		SCALE: N/A	MODEL TYPE: DC POWER JACK
DWN		VIEW:	PART NO.: DC-105-4A-1.6
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
			WEIGHT
			SHEET
			REVISION
			1/1
			A0