


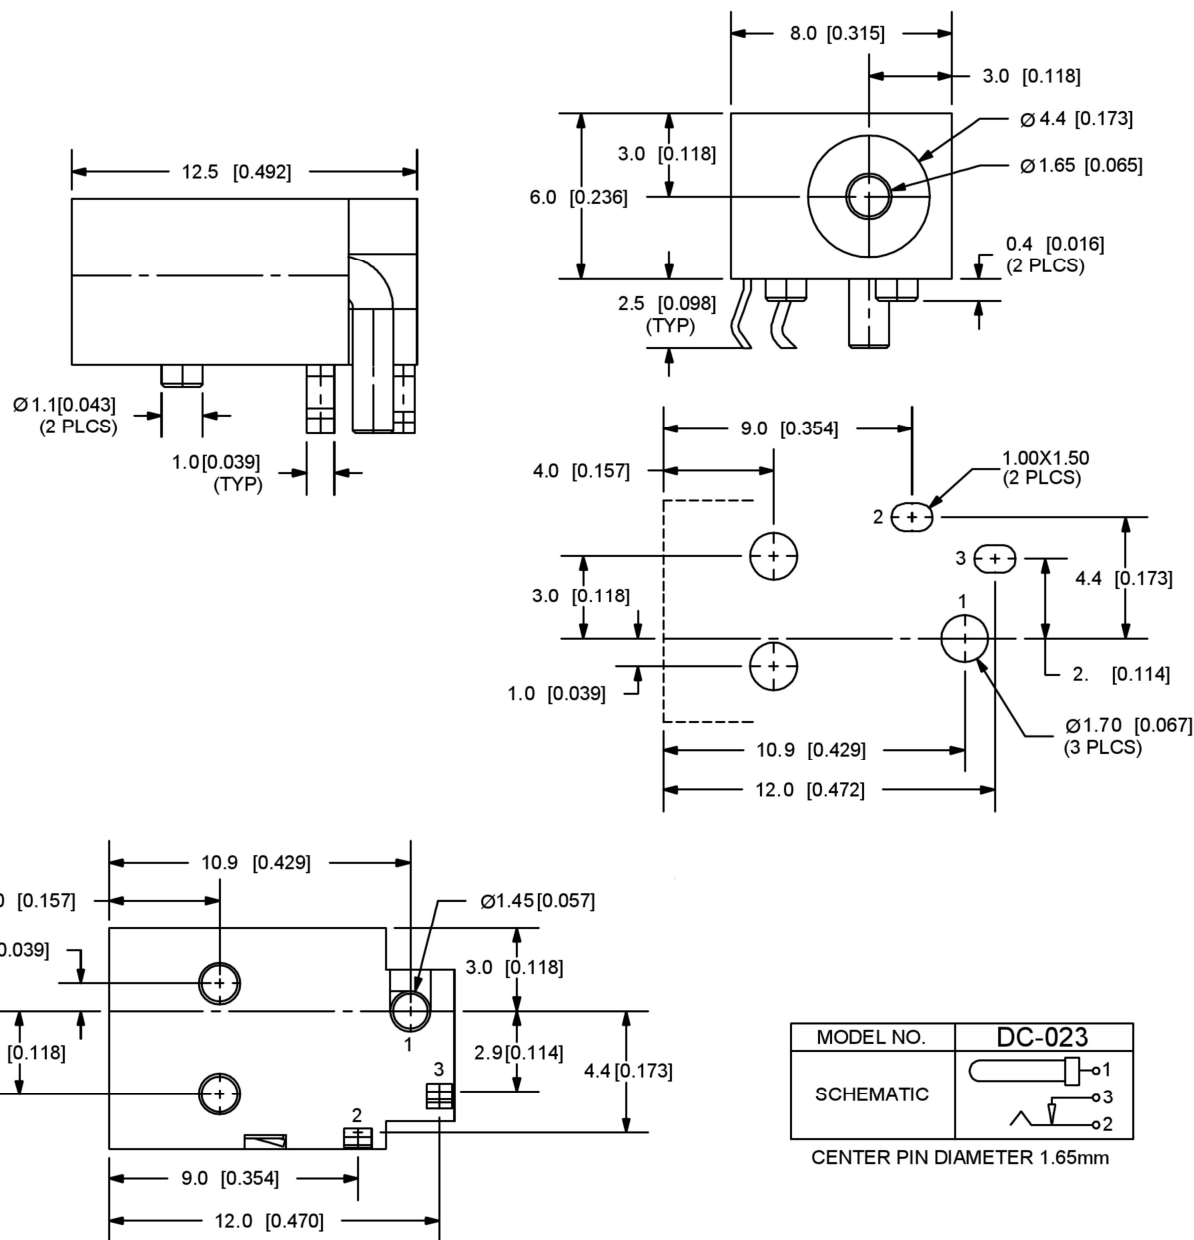

	MATERIAL	PLATING
center pin	Brass	tin
terminal 1	Brass	tin
terminal 2	Phosphor Bronze	tin
terminal 3	Brass	tin
plastic	Pbt	

SPECIFICATIONS:

规格:

RATING: 12V DC @ 1A

额定值: 12V DC@1A

CONTACT RESISTANCE: 30m OHMS MAX

接触电阻: 最大30m欧姆

INSULATION RESISTANCE: 100M OHMS MIN: 500V DC

绝缘电阻: 100M OHMS MIN: 500V DC

VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE

耐压: 500V AC R.M.S. FOR 1 MINUTE

LIFE: 5,000 CYCLES

寿命: 5000个周期

OPERATING TEMP: -20°~ +85°C

工作温度: -20°C~+85°C

DSND		SCALE: N/A	MODEL TYPE: DC POWER JACK
DWN		VIEW:	PART NO.: DC-023
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
REVISIONS			
DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
www.alpsr.com	www.gdxjdz.com	www.xbswitch.com	
DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT
			SHEET
			REVISION
			1/1
			A0