
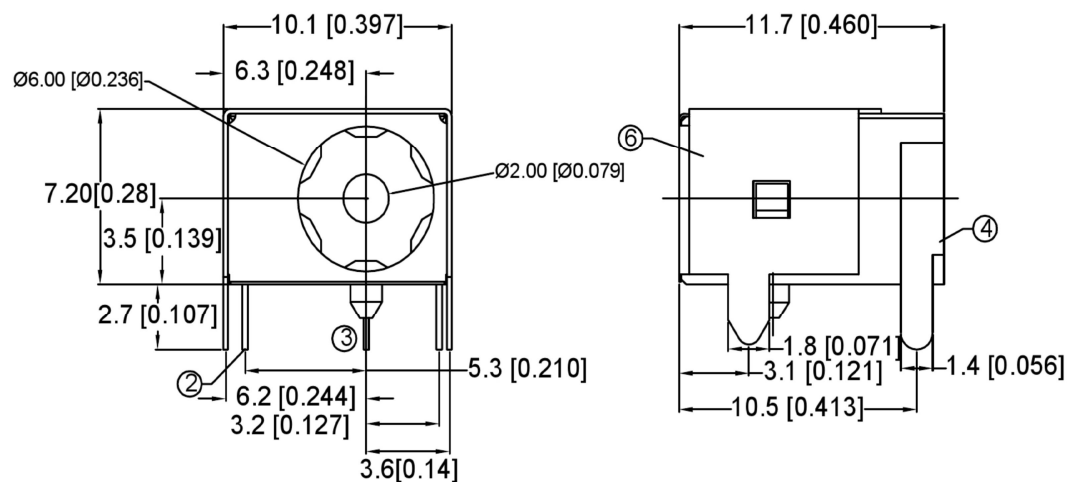
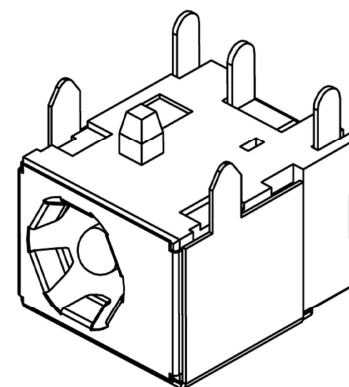
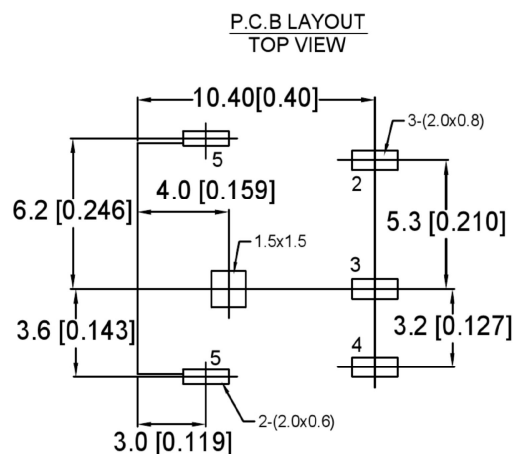


SPECIFICATION

1. Rating : DC 24V 5.0A;
2. Contact resistance: $\leq 0.03\Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles。

SCHEMATIC	
Model	DC-044B
Center Pin	Ø2.0 mm
	Ø2.5 mm

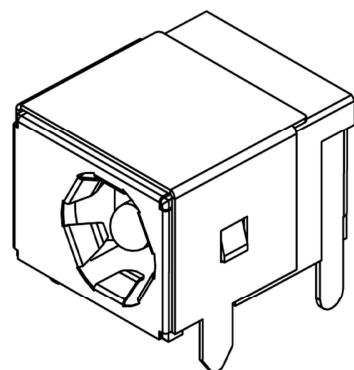

	MATERIAL	PLATING
housing	high thermoplastic	silver
terminal2	Phosphor Bronze	silver
terminal3	brass	silver
terminal4	brass	silver
conter pin	brass	NI
teminal6	Phosphor Bronze	NI
cover	sus	

							DSND		SCALE: N/A	MODEL TYPE: DC POWER JACK		
							DWN		VIEW: 	PART NO.: DC-044B-5A-2.0		
							CHKD		UNIT: mm/in	DWG NO.:		
							APPD		SIZE: A4			
REVISIONS						UNSPECIFIED TOLERANCES				WEIGHT		
www.alpsr.com www.gdxjdz.com www.xbswitch.com						DONG GUAN XI BANG ELECTRONIC CO., LTD				SHEET		
										1/1		
										A0		