

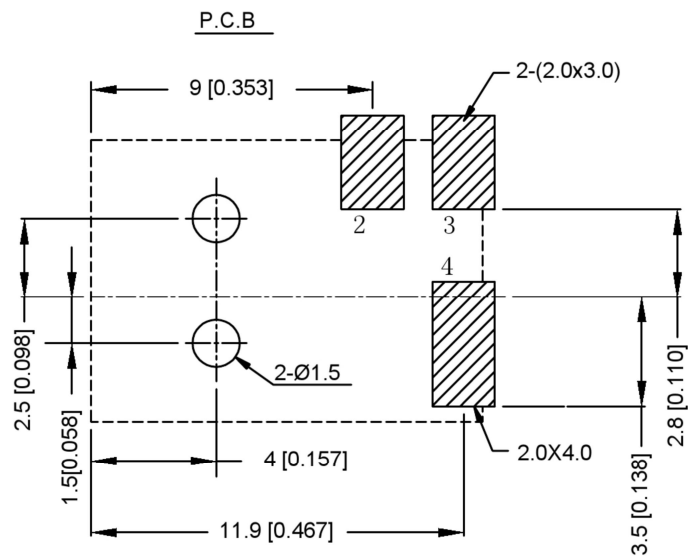
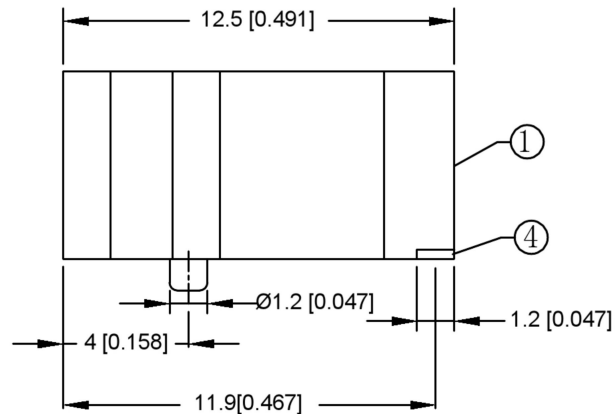


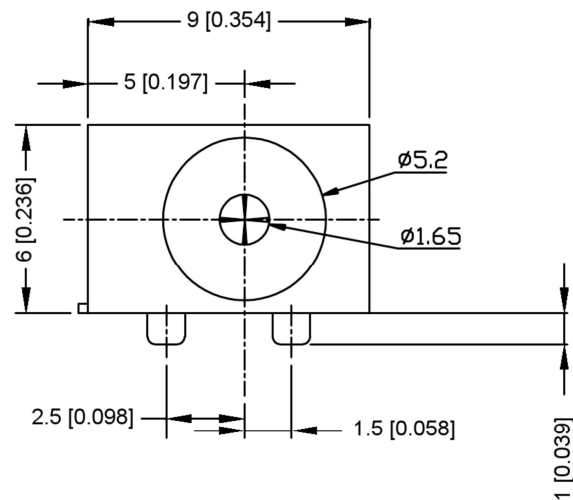

SCHEMATIC



NOTES

注释

- 1.VOLTAGE RATING:30V DC
额定电压: 30V DC
- 2.CONTACT CURRENT RATING: 0.5A
触点额定电流: 0.5 A
- 3.CONTACT RESISTANCE:30mΩ MIN
接触电阻: 最小30mΩ
- 4.INSULATION RESISTANCE:100MΩ MAX,
绝缘电阻: 最大100MΩ ,
5. DIELECTRIC WITHSTANDING:36V AC MIN.
耐介质电压: 500V AC MIN.
- 6.INSTRING AND EXTRACTION FORCE 3-15N
插拔力和拔出力: 3-15N
- 7.TEMPERATURE RANGE:-30℃-70℃
工作温度: -30℃-70℃
- LIFE TEST :5000次 CYCLES
寿命;5000次循环

DECRIPTON	MATERIAL	PLATING
PIN	BRONZE	Ag-Plating
SPRING	BRONZE	Ag-Plating
HURVE PIECE	BRASS	Ag-Plating
HOUSING	PBT/PA66	

							DSND		SCALE: N/A	MODEL TYPE: DC POWER JACK			
							DWN		VIEW: 	PART NO.: DC-049A-SMT			
							CHKD		UNIT: mm/in	DWG NO.:			
							APPD		SIZE: A4				
REVISIONS						UNSPECIFIED TOLERANCES			WEIGHT			SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com						DONG GUAN XI BANG ELECTRONIC CO., LTD						1/1	A0