
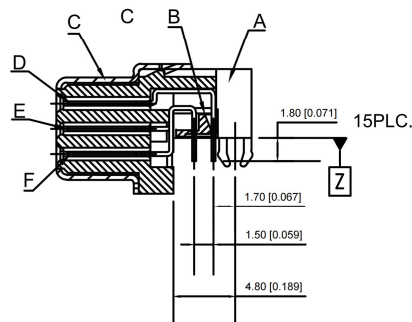
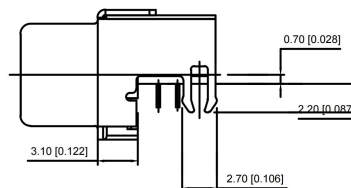


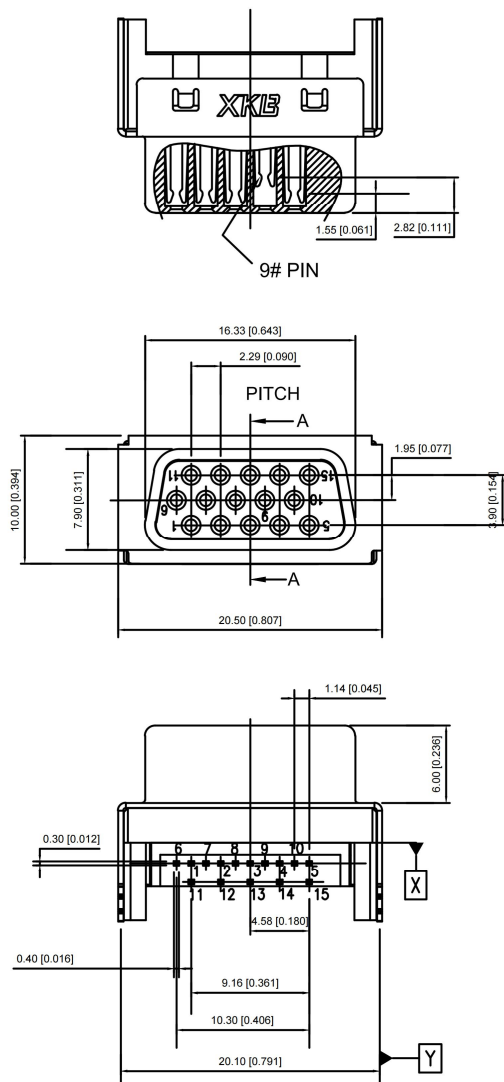

SECTION A-A

MATERIAL:

- ③ HOUSING: THERMOPLASTIC, GLASS FIBER FILLED.
UL 94V-0 RATED.
- ④ SPACER: THERMOPLASTIC, GLASS FIBER FILLED.
UL 94V-0 RATED.
- ⑤ CONTACT: C5191R-H (t=0.30mm).
- ⑥ FRONT SHIELD: SPCC (t=0.40mm).

FINISH:

CONTACT: UNDER PLATED 50u" MIN. NICKEL ALL
OVER 100u" MIN. MATTE TIN IN SOLDERING
AREA GOLD PLATED IN CONTACT AREA.
FRONT SHIELD: NICKEL PLATED WITH 100u"THICK.

HOUSING COLOR	PACKAGE
1:BLACK	0:TRAY
CONTACT GOLD PLATED	SHELL PLATING
A:G/F+MATTE TIN	N:NICKEL

PART NO. DESCRIPTION:

DOR02-15 - X
③
④ MARK
0:NON MARK
5: +D/C

							DSND		SCALE: N/A	MODEL TYPE: DB CONNECTOR		
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: DOR02-15-X		
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:		
				4<L ≤ 16	±0.3		APPD		SIZE: A4			
				16<L ≤ 63	±0.4							
				L > 63	±0.5							
REVISIONS						UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD				
www.alpsr.com www.gdxjdz.com www.xbswitch.com												
										WEIGHT	SHEET	REVISION
											1/1	A0