




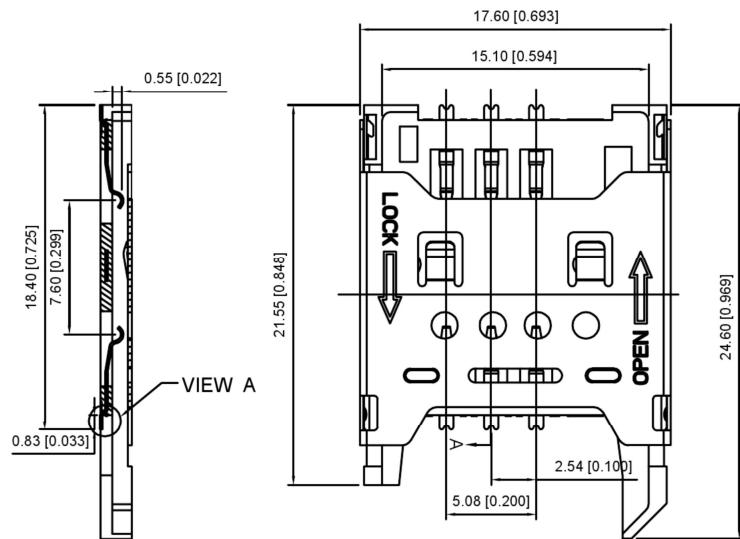


SECTION A-A

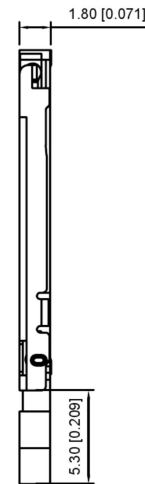




OPEN

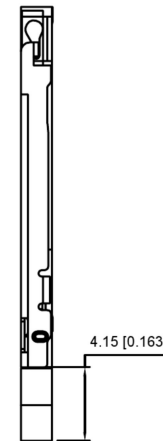

LOCK

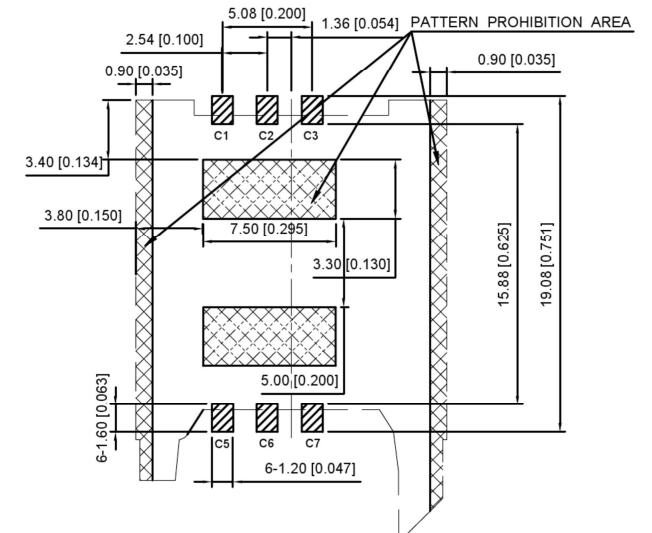

REFERENCE PC BOARD LAYOUT

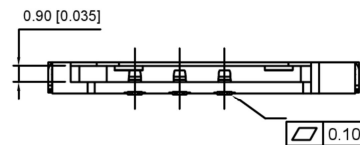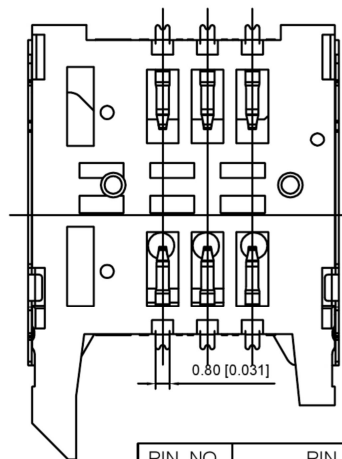

SIM CARD

PIN NO.	PIN NAME
C1	Supply Voltage Vcc
C2	Reset (RST)
C3	Clock (CLK)
C5	Ground
C6	Programming Voltage Vpp

NOTES:

1. MATERIAL:

- 1) HOUSING MATERIAL: THERMOPLASTIC UL94V-0; COLOR: BLACK
- 2) CONTACT MATERIAL: C2680, T=0.15mm
- 3) SHELL MATERIAL: STAINLESS STEEL T=0.20mm

2. FINISH:

- 1) CONTACT FINISH: 30U" MINNICKEL UNDER PLATED PLATED G/F" Au ON CONTACT AREA; PLATED GOLD FLASH ON SOLDER AREA.

3. ELECTRICAL SPECIFICATIONS:

- 1) VOLTAGE RATING: 12VAC
- 2) CURRENT: 1 AMPERES MAX. PER CONTACT
- 3) OPERATION TEMPERATURE RANGE: -25°C ~ +70°C
- 4) CONTACT RESISTANCE: 60MΩ MAX.
- 5) INSULATION RESISTANCE: 1000MΩ MIN
- 6) DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE
- 7) MAX PROCESSING TEMP: 260°C for 30 SECONDS

							DSND		SCALE: N/A	MODEL TYPE: SIM CARD CONN					
							DWN		VIEW: 	PART NO.: XKSIM-008					
							CHKD		UNIT: mm/in	DWG NO.:					
							APPD		SIZE: A4						
REVISIONS						UNSPECIFIED TOLERANCES									
www.alpsr.com www.gdxjdz.com www.xbswitch.com						DONG GUAN XI BANG ELECTRONIC CO., LTD							WEIGHT	SHEET	REVISION
														1/1	A0