
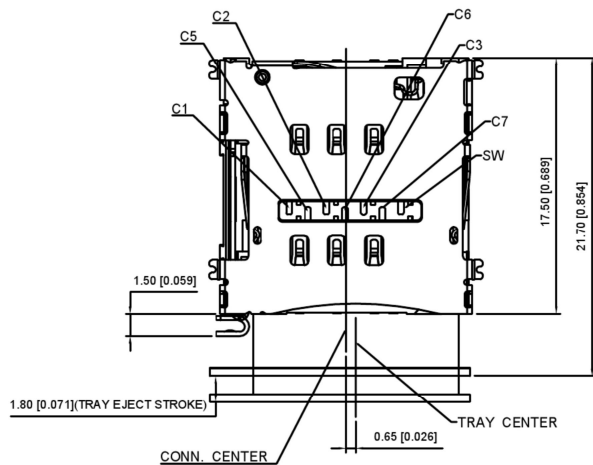
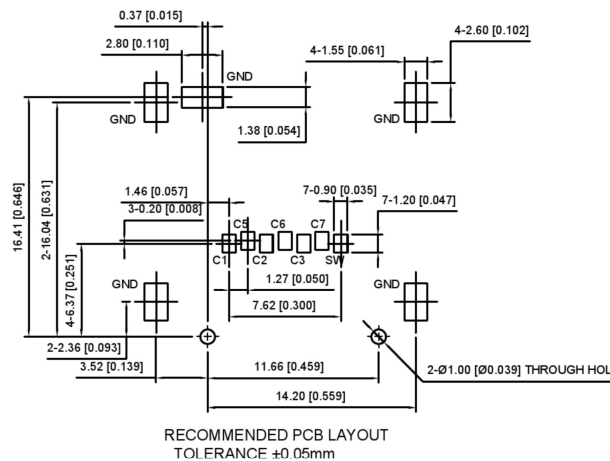
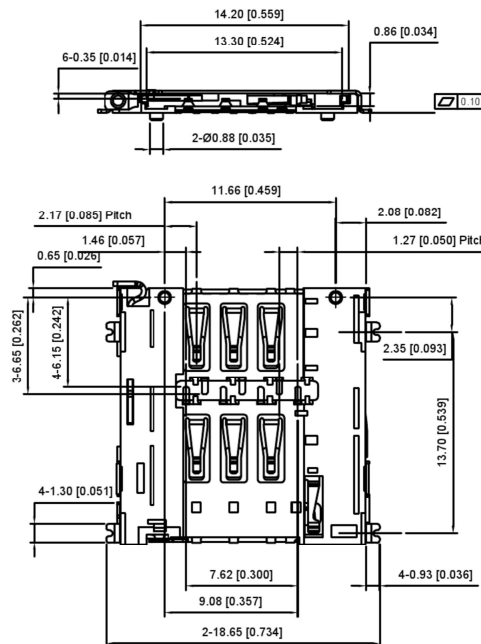


WITHOUT TRAY		TRAY INSERT	
			
Pin No.	Description		
C1	Supply Voltage (Vcc)		
C2	Reset (RST)		
C3	Clock (CLK)		
C5	Ground		
C6	Programming Voltage (Vcc)		
C7	I/O		
SW	Detect Switch		
GND	Shielding Ground		

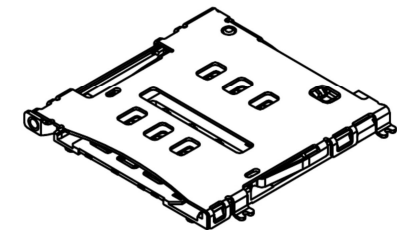

规格 Specification

材料 Material:

绝缘体 Insulator :High Temperature Thermoplastic , UL-94V-0

触点 Contact:Copper Alloy

保护壳 Shield Shell : Stainless Steel

电镀 Plating:

触点 Contact:Plated 50u"Ni overall, Contact Area 1u"Au

保护壳 Shield Shell : Plated 30u" min. Solderability Ni overall

电气 Electrical:

额定电流 Current Rating :0.5A

额定电压 Voltage Rating :30V AC/DC

环境温度 Ambient Temperature Range:-20℃~+85℃

保存温度范围 Storage Temperature Range:-50℃~+100℃

环境湿度范围 Ambient Humidity Range :95% R.H. Max.

接触电阻 Contact Resistance : 100mΩ Max.

绝缘电阻 Insulation Resistance:1000MΩ Min./500V DC

插拔次数 Mating Cycles : 3000Min Insertions

				ANGLAR	$\pm 5^\circ$
				$L \leq 4$	± 0.2
				$4 < L \leq 16$	± 0.3
				$16 < L \leq 63$	± 0.4
				$L > 63$	± 0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com	www.gdxjdz.com	www.xbswitch.com			
DATE	REVISED	APPROVED			



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND		SCALE: N/A	MODEL TYPE: SIM CARD CONN		
DWN		VIEW:	PART NO.: XKSIM-1130-1		
CHKD		UNIT: mm/in	DWG NO.:		
APPD		SIZE: A4			
			WEIGHT	SHEET	REVISION
				1/1	A0