




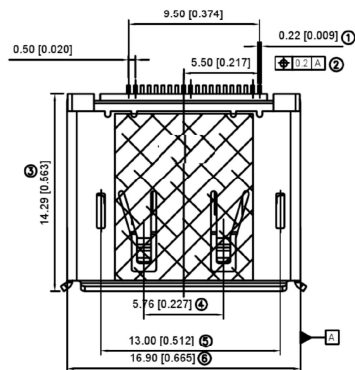




S:Scrolls

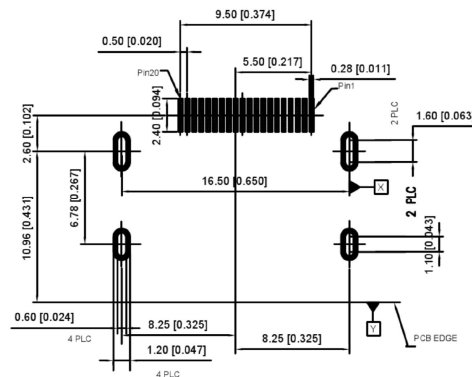

RECOMMENDED P.C.B LAYOUT (THICKNESS=1.2mm)
(COMPONENT SIDE) TOLERANCES ±0.05mm

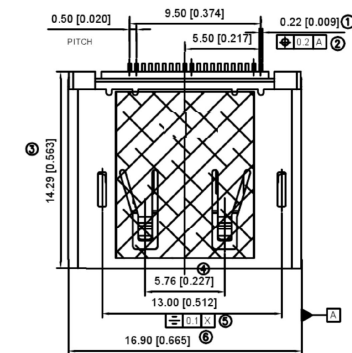

F:Flat

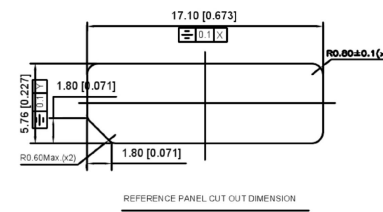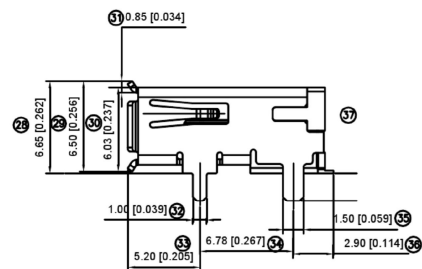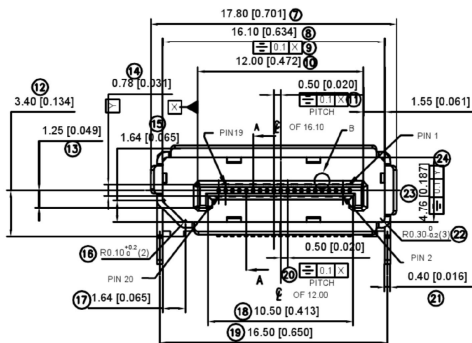

NOTES:

1. MATERIAL:

HOUSING: THERMOPLASTIC HIGH TEMP WITH 30% GF
(LCP E130I, E471I OR 6807LHF), UL94V-0.

CONTACT: C2680R-EH T=0.20mm

SHELL: C5191R-H T=0.40mm

MYLAR: KAPTON TAPE T=0.06mm

2. PLATING:

CONTACT: GOLD PLATING ON CONTACT AREA (SEE PART NO. DESCRIPTION),
MATTE TIN OVER NICKEL ON SOLDER TAIL.

SHELL: 40u"MIN. NICKEL PLATING OVERALL.

3. SOLDER TAIL COPLANARITY 0.10MAX.

4. PART NO. DESCRIPTION:

CAR03-20 1 C N X X

① DISPLAY PORT

② POS NO.:

20/20 POS.

③ HOUSING COLOR

1. BLACK

④ CONTACT PLATING

C: Au 30u" + MATTE TIN

A: Au G/F + MATTE TIN

G: Au 4u" + MATTE TIN

⑤ SHELL PLATING:
N=NICKEL PLATING

⑥ PACKAGE




2=TAPE REEL

5=TAPE REEL + MYLAR

⑦ Interface type

S:Scrolls

F:Flat

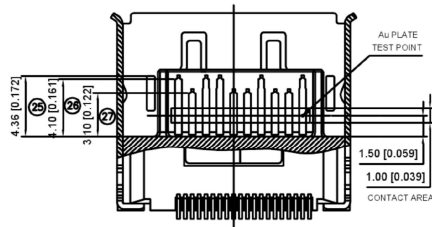

DSND	SCALE: N/A	MODEL TYPE: DP CONNECTOR
DWN	VIEW:	PART NO.:
CHKD	UNIT: mm/in	DWG NO.:
APPD	SIZE: A4	CAR03-201CNXX
DONG GUAN XI BANG ELECTRONIC CO., LTD		WEIGHT
		SHEET
		REVISION
		1/1
		A0

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
www.alpsr.com	www.gdxjdz.com	www.xbswitch.com		
ANGLAR	±5°			
L ≤ 4	±0.2			
4 < L ≤ 16	±0.3			
16 < L ≤ 63	±0.4			
L > 63	±0.5			