
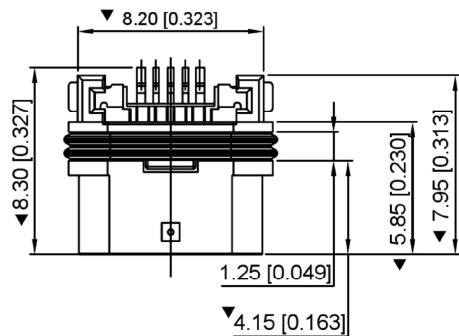
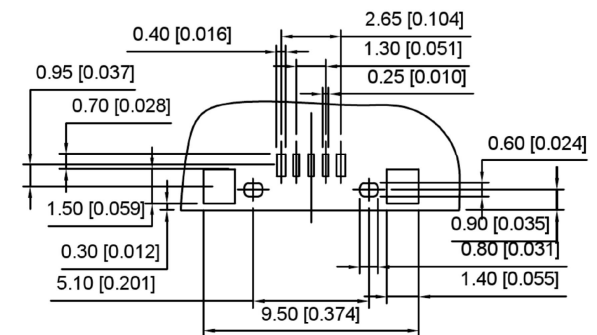

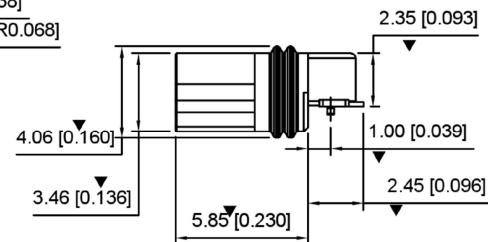
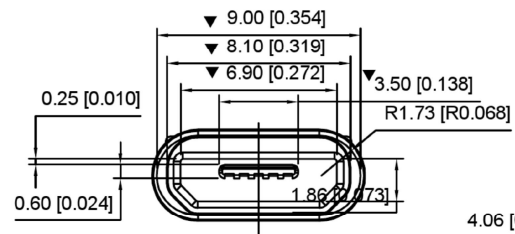


Notes:


1. Dimension shall be interpreted per ASME Y14.5M1994.
2. Dimension marked ∇ & $\blacktriangledown$ should be checked by Q.C. and process, engineers and ∇ should also check the CPK data.

Specification

1. Current Rating: 1.0 AMP
2. Voltage Rating: 30V AC,DC
3. Dielectric Strength: 500V AC RMS for 1 minute.
4. Contact Resistance: 30 m Ω Max.
5. Insulator Resistance: 500M Ω Min. AT 250V DC.
6. Mating/Unmating cycles: 2000cycles
7. Temperature: -30°C to +60°C

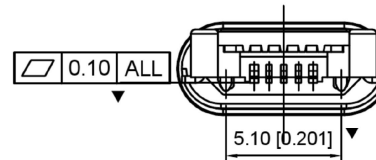

P.C.B LAYOUT

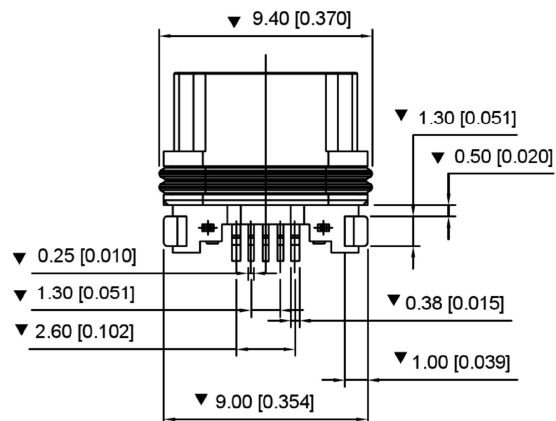

ITEM	PART NAME	QTY	MATERIAL	FINISHING
③	Shell	1	C2680R-H	Au/Ni Plating T=0.3mm
②	Terminal	5	Phosphor Bronze C5210R-EH	Au/Ni Plating T=0.2mm
①	Housing	1	HI-TEMP.PLASIC UL 94V-0	BLACK

							DSND		SCALE: N/A	MODEL TYPE: MICRO USB				
							DWN		VIEW: 	PART NO.:				
							CHKD		UNIT: mm/in	DWG NO.:				
							APPD		SIZE: A4	U-E-M1SS-Y-1				
REVISIONS												WEIGHT	SHEET	REVISION
UNSPECIFIED TOLERANCES													1/1	A0
www.alpsr.com www.gdxjdz.com www.xbswitch.com														