
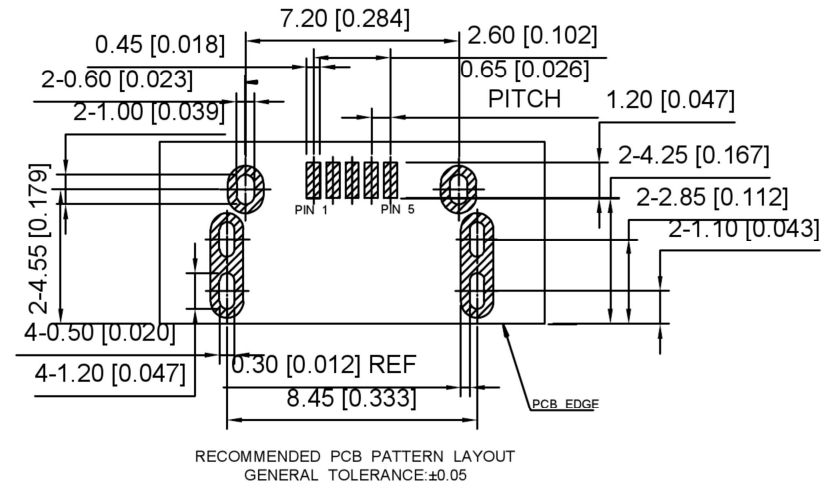
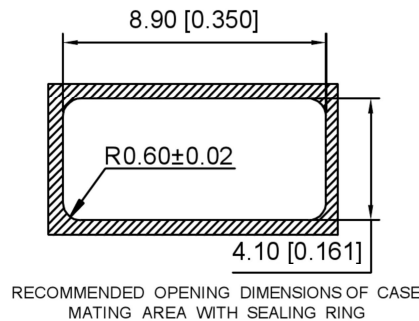
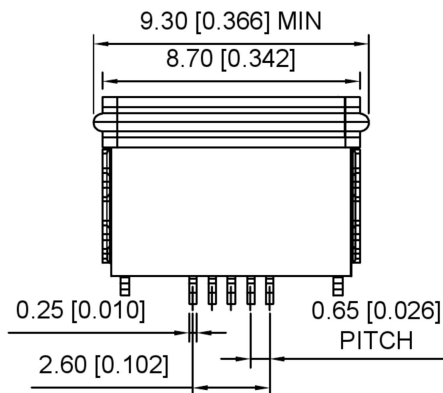
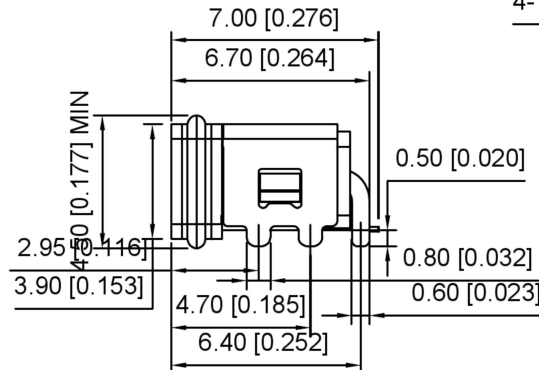
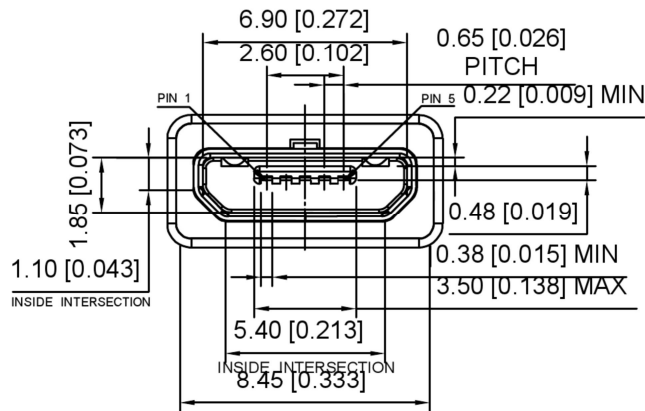
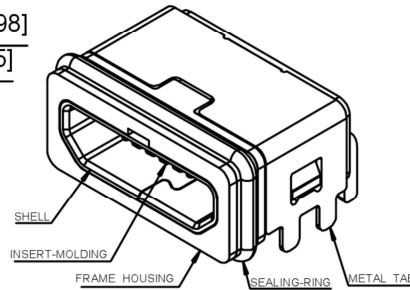


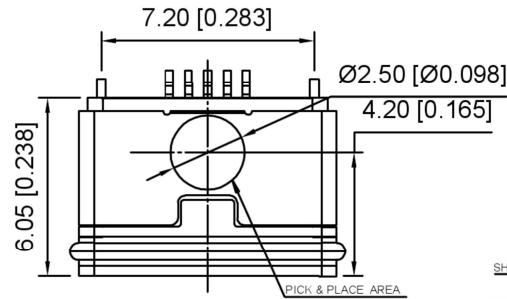

NOTES:

1. MATERIAL:

HOUSING: LCP, BLACKUL94V-0;
 TERMINAL: COPPER ALLOY. THICKNESS:0.15mm; SHELL: STAINLESS STEEL,
 THICKNESS:0.30mm;
 METAL TAB:STAINLESS STEELTHICKNESS:0.25mm;
 SEALING RING:SILICON RUBBER.

2.PLATING:

TERMINAL: CONTACT AREA: GOLD FLASH OVER MINIMUM 0.75MICRON Pd/Ni;
 SOLDER TAIL AREA: GOLD FLASHUNDER PLATING: NICKEL 2.0MICRON MINIMUM
 SHELL / METAL TAB: 2.0MICRON MINIMUM MATTE TIN OVER
 1.27MICRON MINIMUM NICKEL UNDER PLATING.

3.TAIL COPLANARITY 0.08mm MAXIMUM.

4.PRODUCT SPECIFICATION: PK-105296-002.

5. PACKAGE SPECIFICATION: PS-105296-001.

6.PRODUCTS MEET IP67 TEST REQUEST.

7.COMPLIANT TO ROHS DIRECTIVE 2011/65/EU AND ELV 2000/53/EC.

							DSND		SCALE: N/A	MODEL TYPE: MICRO USB				
							DWN		VIEW: 	PART NO.:				
							CHKD		UNIT: mm/in	DWG NO.:				
							APPD		SIZE: A4	U-E-M5SS-Y-6				
REVISIONS				DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES			WEIGHT	SHEET	REVISION		
www.alpsr.com				www.gdxjdz.com				www.xbswitch.com					1/1	A0