



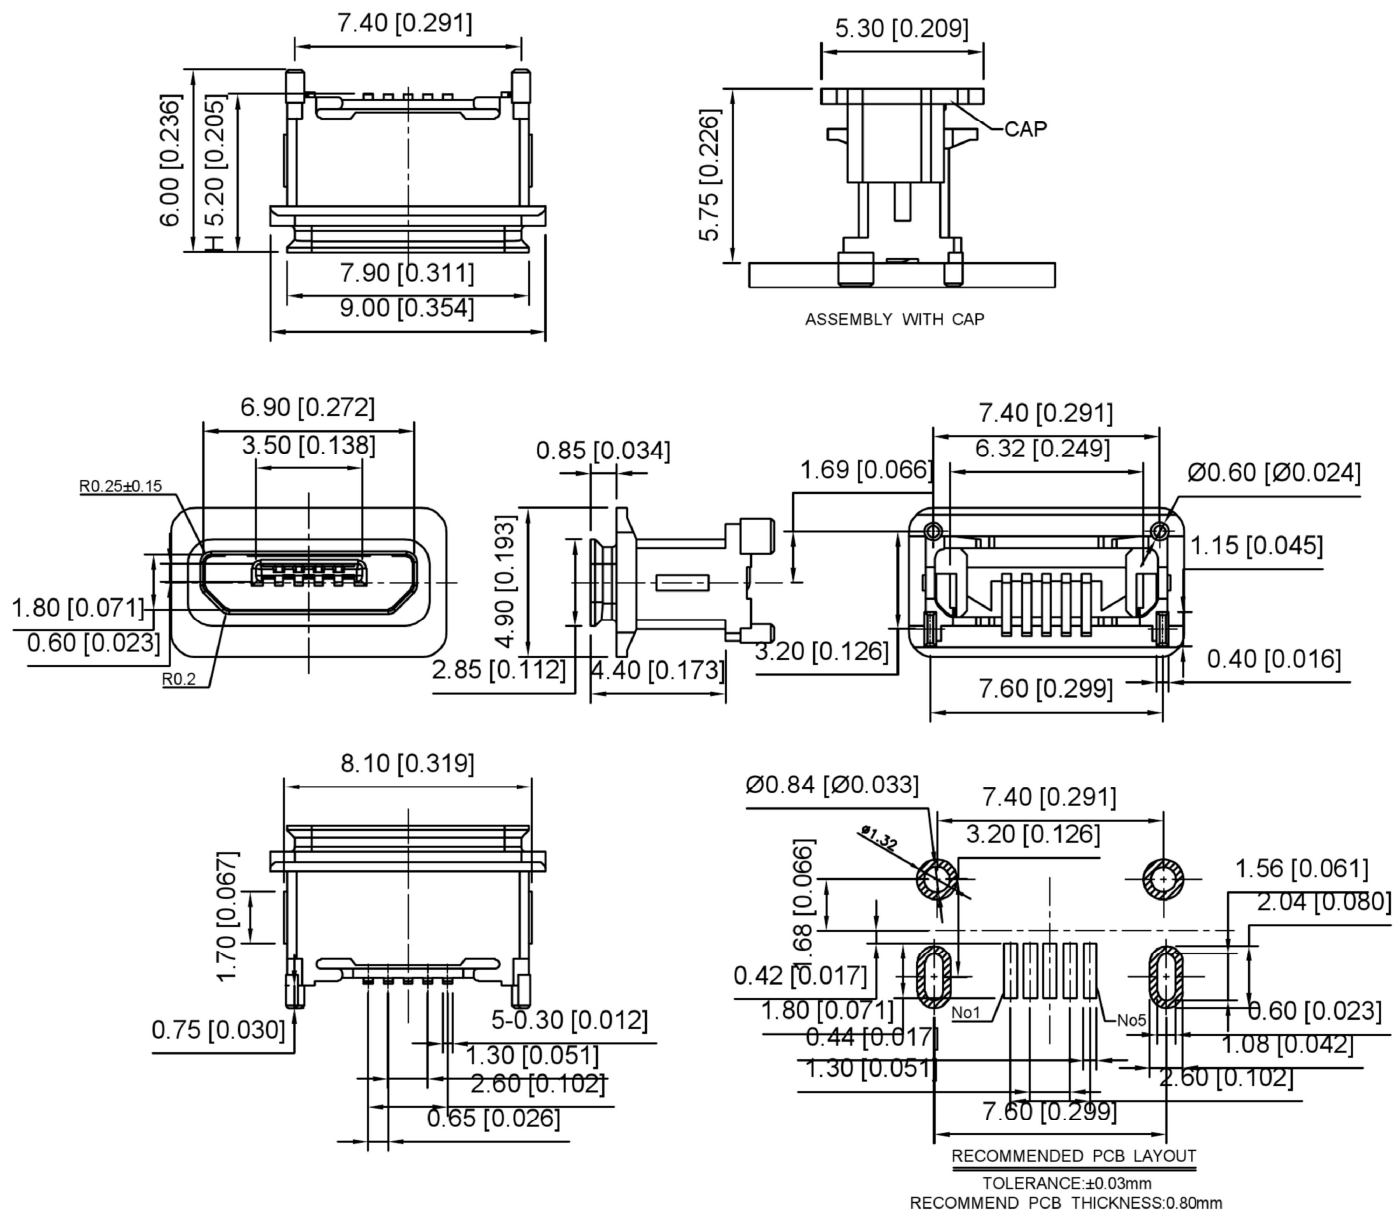

- NOTES:
1. MATERIAL:
HOUSING: THERMOPLASTIC HIGH-TEMP UL94V-0 BLACK COLOR.
CONTACT: COPPER ALLOY
SHELL: STAINLESS STEEL.
 2. FINISH:
CONTACT: SEE TABLE 1.
OUT SHELL: 50u" Min. NICKEL ALL OVER
 3. APPLIED TO IR SOLDERING PROCESS.
 4. SPECIFICATION:
4.1. ELECTRICAL CHARACTERISTICS
CONTACT CURRENT RATING: Signal pin 1A, Power pin 1.8A
VOLTAGE RATING: 30V AC rms.
CONTACT RESISTANCE: 30mΩ MAX.
DIELECTRIC WITHSTANDING VOLTAGE:
UNMATEP CONTACT 100V AC rms. 60MHZ FOR 1 MINUTE.
INSULATION RESISTANCE: 1000MΩ MIN. 100V DC
TEMPERATURE RANGE: -30°C TO +85°C
4.2. MECHANICAL:
INSERTION FORCE: 35N MAX.
WITHDRAWAL FORCE: 8N~25N.
DURABILITY: 10,000 CYCLES

U-E-M8SS-W-1

1: G/F 2.5u" 3: 10u"
4: 15u" 5: 30u"



IP-X8

							DSND		SCALE: N/A	MODEL TYPE: MICRO USB		
				ANGLAR	±5°		DWN		VIEW: 	PART NO.:		
				L ≤ 4	±0.2							
				4 < L ≤ 16	±0.3		CHKD		UNIT: mm/in	DWG NO.:		
				16 < L ≤ 63	±0.4					U-E-M8SS-W-1		
				L > 63	±0.5	APPD		SIZE: A4				
REVISIONS				UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD				WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com											1/1	A0