


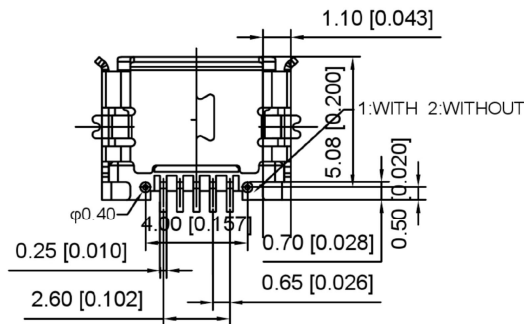
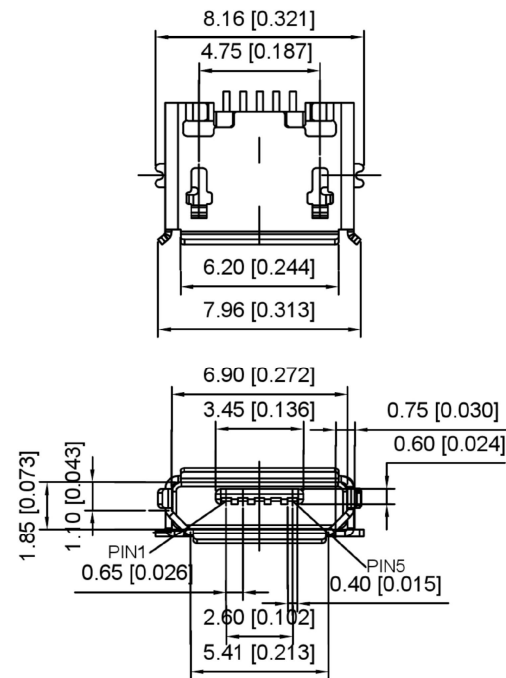


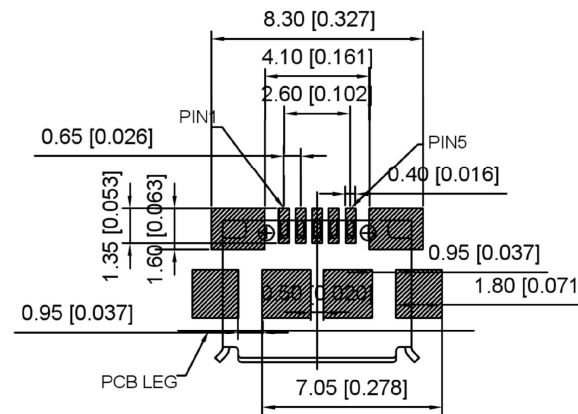

Scrolls (S)

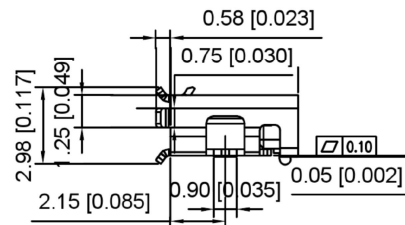

RECOMMENDED P.C.B. LAYOUT
TOP VIEW (TOLRANCE: ± 0.05)

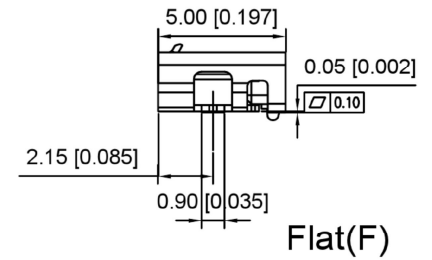

Flat(F)

Material

Housing Material: LCP, UL94V-0, black

Contact Terminal: Copper Alloy

Metallic Shell: Sus

Electrical

Voltage Rating: 30 V AC

Current Rating: Signal (Pins 2,3,4): 1.0A, Power (Pins 1,5): 1.8A

Contact Resistance: 30mΩ Max

Insulation resistance: 1000MΩ Min

Dielectric withstanding voltage: 250V AC/Minute

Mechanical

Durability: 10,000 cycles

Mating Force: 35N (3.57Kgf) Max

Unmating Force: 8N (0.82Kgf) Min.

U253-05XX-4BH89-XXS

1:AU 1U"

6:AU 30U"

T:TIN

N:NICKEL

S:Sus

1:WITH 2:WITHOUT

S:Scrolls F:Flat

							DSND		SCALE: N/A	MODEL TYPE: MICRO USB		
				ANGLAR	±5°		DWN		VIEW: 	PART NO.:		
				L ≤ 4	±0.2							
				4 < L ≤ 16	±0.3		CHKD		UNIT: mm/in	DWG NO.:		
				16 < L ≤ 63	±0.4					U253-05XX-4BH89-XXS		
				L > 63	±0.5		APPD		SIZE: A4			
				DATE	REVISED	APPROVED						
REVISIONS						UNSPECIFIED TOLERANCES						
www.alpsr.com www.gdxjdz.com www.xbswitch.com						DONG GUAN XI BANG ELECTRONIC CO., LTD						
									WEIGHT	SHEET	REVISION	
										1/1	A0	