
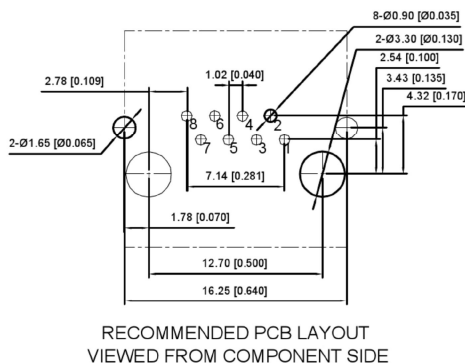


MATERIAL 材料:
HOUSING 外壳: PA46,UL94V-0,BLACK.
TERMINAL 端子: PHOSPHOR BRONZE ,Ø=0.46MM,
 GOLD PLATING ON CONTACT AREA.
SHIELD 保护物:C2680,T=0.20MM,20U" MIN NICKEL PLATING
 ON ALL AREA.

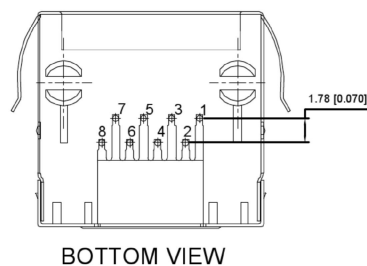

MECHANICAL 机械:
DURABILITY 耐用性: 750 CYCLES MIN.12.5MM/MINUTE
INSERTION FORCE 插入力: 2.2KG.F MAX
RETENTION STRENGTH 固位力:7.7KG.F BETWEEN JACK AND PLUG
OPERATING TEMPERATURE 工作温度: -40°C~+85°C.
STORAGE TEMPERATURE 储存温度: -40°C~+85°C.
 ALL CRITICAL DIMENSIONS WITH "MM"

ELECTRICAL 电动:
VOLTAGE 电压:125 VOLTS AC
CURRENT RATING 额定电流:1.5AMP
DIELECTRIC STRENGTH 介电强度:1000 VAC RMS 50HZ OR 60HZ,1MIN
INSULATION RESISTANCE 绝缘电阻:500 MEGA OHMS MIN.INITIAL
 AFTER 500V DC FOR 1 MINUTE
CONTACT RESISTANCE 接触电阻:SINGLE TERMINAL 30 MILLIOHMS MAX
 INITIAL 50 MILLIOHMS MAX.AFTER
 DURABILITY TEST

				ANGULAR	±5°		DSND	SCALE: N/A	MODEL TYPE:	RJ JACK	
				L ≤ 4	±0.2		DWN	VIEW:	PART NO.:		
				4 < L ≤ 16	±0.3		CHKD	UNIT: mm/in	DWG NO.:	X12ADHWA3DY1027	
				16 < L ≤ 63	±0.4		APPD	SIZE: A4	WEIGHT	SHEET	REVISION
				L > 63	±0.5		DONG GUAN XI BANG ELECTRONIC CO., LTD			1/1	A0
REVISIONS				UNSPECIFIED TOLERANCES							
www.alpsr.com www.gdxjdz.com www.xbswitch.com											