




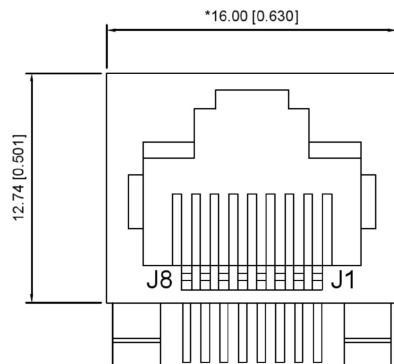


FRONT VIEW

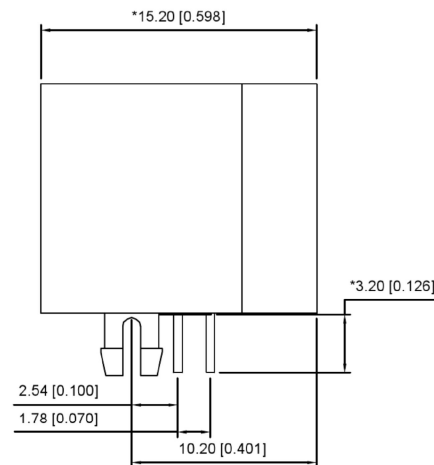


RIGHT SIDE VIEW



BOTTOM VIEW

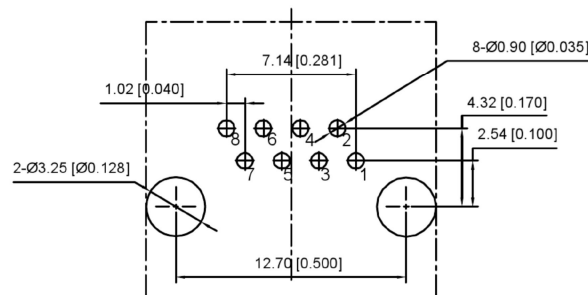

RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

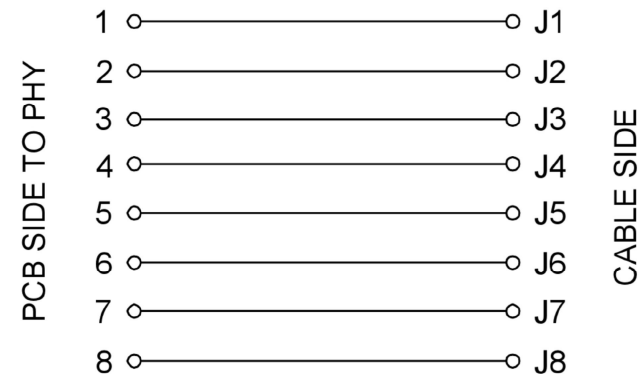

MATERIAL 材料:

HOUSING 外壳: PA46,UL94V-0,BLACK.

TERMINAL 端子: PHOSPHOR BRONZE ,Ø=0.46MM,
GOLD PLATING ON CONTACT AREA.

SHIELD:C2680,T=0.20MM,20U" MINNICKELPLATING
ON ALL AREA.

MECHANICAL 机械:

DURABILITY 耐用性: 750 CYCLES MIN.12.5MM/MINUTE

INSERTION FORCE 插入力: 2.2KG.F MAX

RETENTION STRENGTH 固位力:7.7KG.F BETWEEN JACK AND PLUG

OPERATING TEMPERATURE 工作温度: -40°C~+85°C.

STORAGE TEMPERATURE 储存温度: -40°C~+85°C.

ALL CRITICAL DIMENSIONS WITH ""

ELECTRICAL 电动:

VOLTAGE 电压:125 VOLTS AC

CURRENT RATING 额定电流:1.5AMP

DIELECTRIC STRENGTH 介电强度:1000 VAC RMS 50HZ OR 60HZ,1MIN

INSULATION RESISTANCE 绝缘电阻:500 MEGA OHMS MIN.INITIAL
AFTER 500V DC FOR 1 MINUTE

CONTACT RESISTANCE 接触电阻:SINGLE TERMINAL 30 MILLIOHMS MAX
INITIAL 50 MILLIOHMS MAX.AFTER
DURABILITY TEST

							DSND		SCALE: N/A	MODEL TYPE: RJ JACK		
							DWN		VIEW: 	PART NO.:		
							CHKD		UNIT: mm/in	DWG NO.:		
							APPD		SIZE: A4	X12ADIWA3DY1027		
							DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISION
REVISIONS										1/1	A0	
www.alpsr.com www.gdxjdz.com www.xbswitch.com												