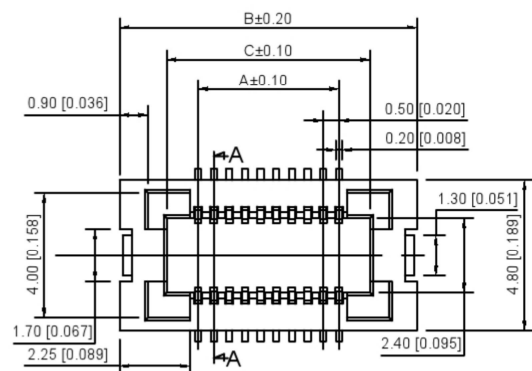


材料 Material:

*绝缘材料 Insulation:

Glass filled Polyamide UL 94V-0 color Black

*接触材料 Contact: Copper alloy, t=0.2mm

*固定翼片 Fixed Tab: Brass, t=0.2mm

*电镀 Plating code: Gold flash over Nickel

DIM.A = 0.50 * No. of Spaces

DIM.B = DIM.A + 5.0



DIM.C = DIM.A + 2.0

DIM.D = DIM.A + 2.5

*Available in 10 through 80 circuits

X1015 W F-XX X-X

① ②③④⑤⑥

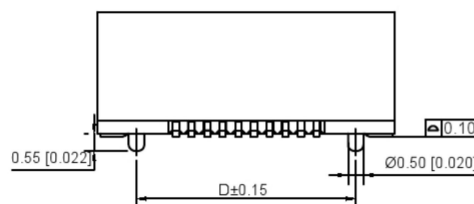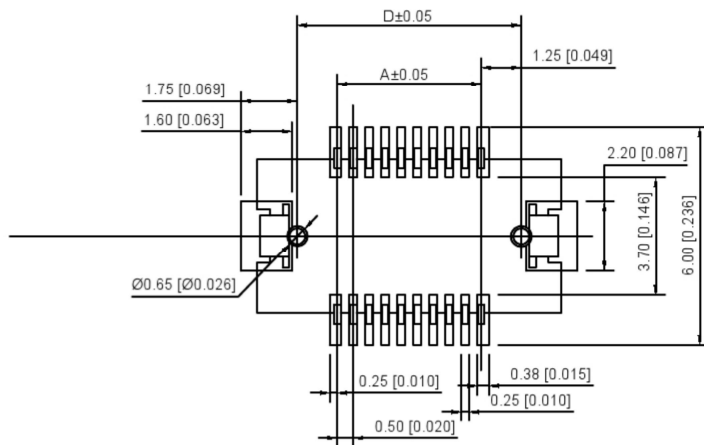

① Series No.

② Category: W-WAFER

③ Welding Board Angle: F-Female

④ No. of Circuits

⑤ Special No: S-With Positioning Column

⑥ Height:

A: DIM.E=2.0mm B: DIM.E=2.5mm F: DIM.E=4.5mm

C: DIM.D=3.0mm E: DIM.E=4.0mm

				ANGLAR	±5°
				L ≤ 4	±0.2
				4<L≤ 16	±0.3
				16<L≤ 63	±0.4
				L> 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND		SCALE: N/A	MODEL TYPE: BTB CONNECTOR
DWN		VIEW:	PART NO.:
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	X1015WF-XXX-X
		WEIGHT	SHEET
			1/1
		REVISION	A0