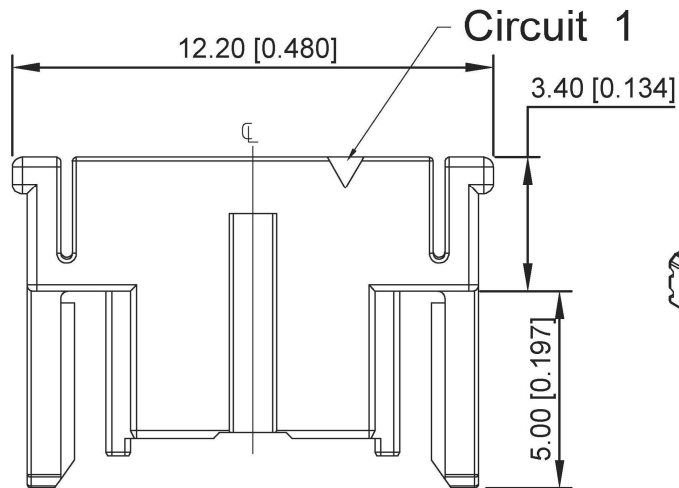


Specifications(规格):

Voltage rating(额定电压):500V AC/DC

Current rating(额定电流):2A AC/DC

Withstanding voltage(耐压值):1500V AC/minute

Temperature range(工作温度):-40℃~+85℃

Insulation resistance(绝缘电阻):1000MΩ

Contact resistance(接触电阻):<30mΩ

After environmental testing(环境测试后):<40mΩ

X3700 H-02-PT

① ② ③ ④

1.系列

2.类别:H-HSG

3.PIN数或防呆KEY形态:单排-XX

4.材质:PA66, UL94V-0

X3700H-02-PT	PA66 UL94V-0	X3700T	X3700W
PART NO	Material		

							DSND		SCALE: N/A	MODEL TYPE: X3700H-02-PT				
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: 3.70mm BTB Style Connectors				
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:				
				4 < L ≤ 16	±0.3		APPD		SIZE: A4					
				16 < L ≤ 63	±0.4									
				L > 63	±0.5									
				DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES							
REVISIONS												WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com													1/1	A0