

REV.	DESCRIPTION	DATE
A	RELEASE	Mar.22, 2019
B		Apr.02, 2019
C		May.28, 2019






MATERIALS

1. HOUSING : LCP (UL94V-0), BLACK.
2. TERMINAL : COPPER ALLOY, GOLD PLATING.
UNDER NICKEL PLATING.
3. SHELL : COPPER ALLOY, NICKEL PLATING.
4. MYLAR : POLYESTER FILM.

SPECIFICATION

1. CURRENT RATING : 0.5A. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 100M Ω MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m Ω MAX.
5. OPERATING TEMPERATURE : -25°C TO +85°C.
6. DURABILITY : 10000 CYCLES.
7. MATING FORCE : 4.5kgf MAX.
8. UNMATING FORCE : 1.0kgf MIN.

RECOMMENDED P.C.B LAYOUT
TOLERANCE ± 0.05
TOP VIEW

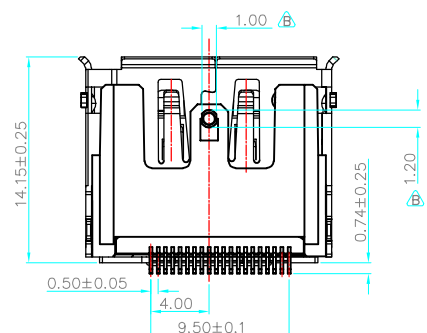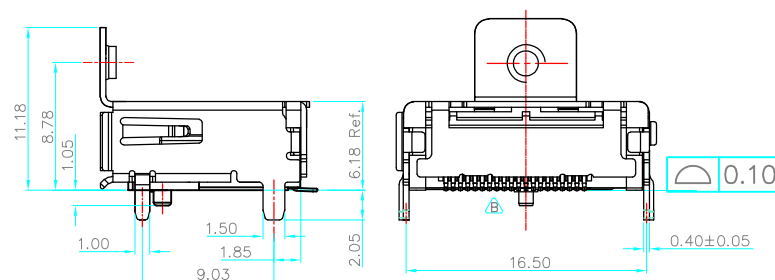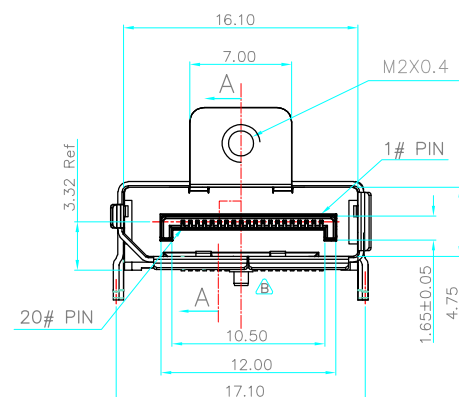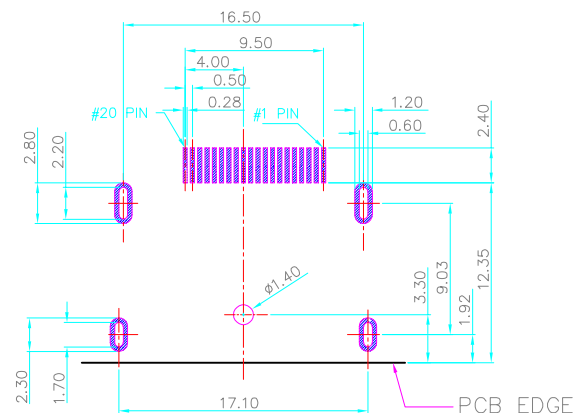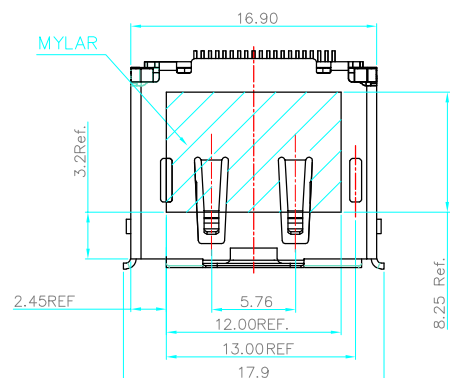

TOLERANCE .0= ± 0.25 .00= ± 0.15 .000= ± 0.05 ANG.= $\pm 3^\circ$		XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
APP'D STONY		NAME DISPLAYPORT SMT TYPE FEMALE (SCREW THREAD M2)-8.78mm	
PRODUCT SPEC. —		DRAW NO. XB-DP-CAR400	
UNITS : mm			
SCALE NONE	SIZE A4	SHEET 1 OF 2	REV. C

