

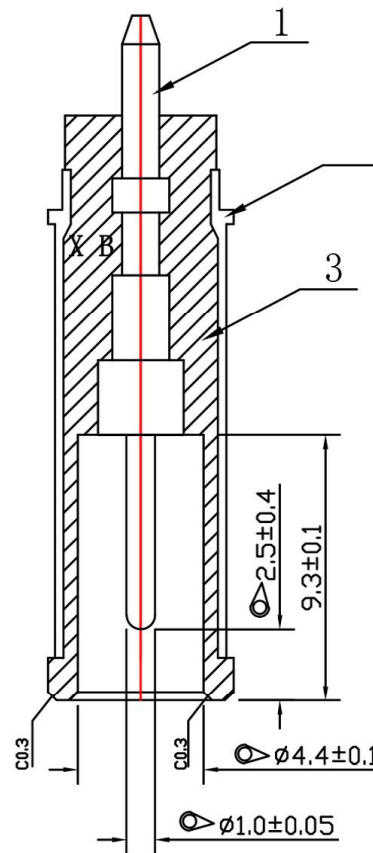


CAD FILE: 6.5*1.0*24.0全胶内缩2.5

ROHS

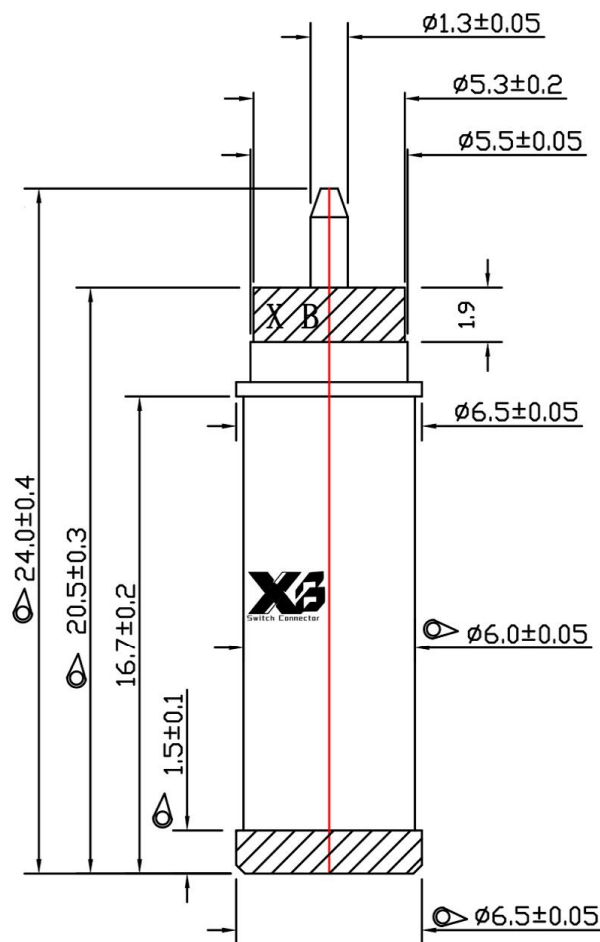

技术要求: (EIAJ RC5320A)

- 1、外观: 铜管端面无刮伤、凹点、露铜、无电镀不良; 绝缘胶需注胶饱满、无披锋、缩水、杂色等不良。
- 2、电气性能: a. 接触电阻: 与母座测试30mΩ以下; b. 绝缘阻抗测试: DC500V, 100MΩ 无异状; c. 耐压测试: AC500V, 漏电电流0.5mA, 1分钟无异状; d. 额定电压和电流: (RATED VOLTAGE/CURRENT) DC10.5V 2A。
- 3、机械性能: a. 用测试母座测试插拔力: 0.3-3.0kGf之间。
- 4、盐雾试验: 正常试验条件能过48小时, 盐水浓度5%。
- 5、工作温度: -20℃-45℃。

3	绝缘体	111-005	PBT+15%GF	黑色	UL 94V-0
2	铜管	61-650173-01-N	黄铜C3604	镀镍2-3UM	1
1	铜针	32-210215-01-N	黄铜C3604	镀镍2-3UM	1

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : DC Power Plug			UNIT : mm	DRWG NO.: 6.5平胶内缩
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-DC-6501T			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	DONG GUAN XI BANG ELECTRONICS CO., LTD.				