
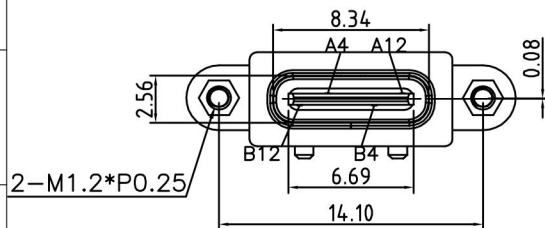
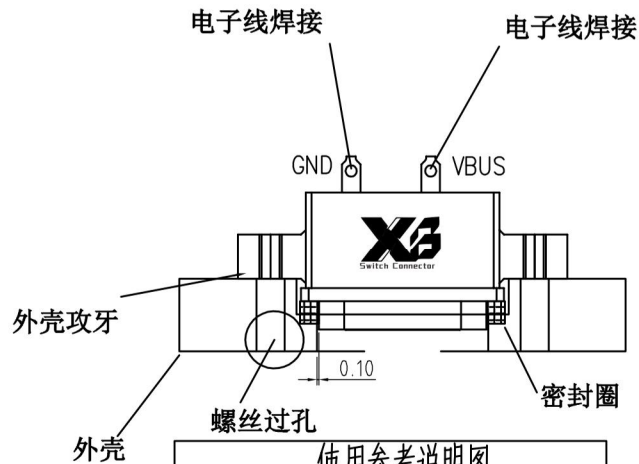





ROHS

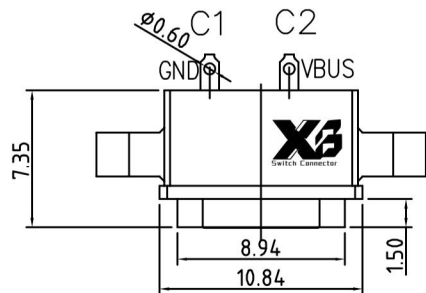

INTERFACE(FRONT VIEW)											
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
			VBUS								
GND								VBUS			GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

PIN ASSIGNMENT

PIN NO.	A12&B12	A4&B4
SIGNAL NAME	GND	VBUS
PCB PAD NO.	C1	C2

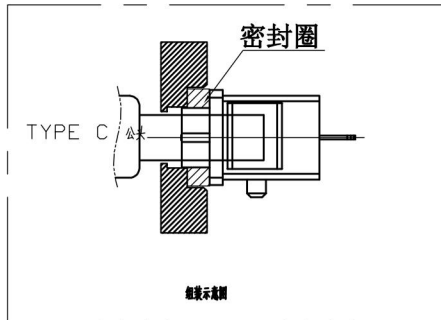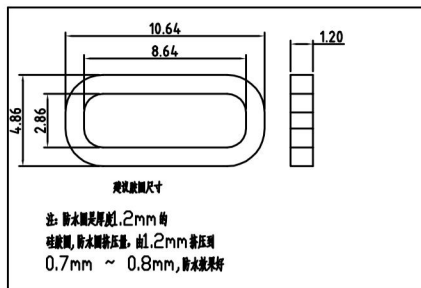

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:5000 CYCLES

		1		
4	Shell1	1	SUS304 Ni Plating T=0.3mm	Ni40~120u ⁺
3	Housing2	1	LCP(G.F30%)	
2	Contact	4	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	Ni40~160u ⁺ AuCONTACT AREA:3 OTHER AREA:G/F
1	Housing	1	PA9T (G.F30%)	
ITEM	PARTNAME	Q'TY	FINISH	NOTE

X, ± 0.50	X,* $\pm 2^{\circ}$
.X ± 0.30	.X,* $\pm 1^{\circ}$
.XX ± 0.10	.XX,* $\pm 0.5^{\circ}$
.XXX ± 0.05	

UNITS
mm

MAT'L

FINISH

Q'TY



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

PART NO.

XB-USB-C-2P-1129-IPX7

APPD: GAO. PENG

CHKD:	HE LONG FEI
-------	-------------


DR: PANG. DONG

TITLE:

7 2PIN带螺母焊线式防水TYPE C

DWG NO.:	
----------	--

XB-USB-C-2P-1129-IPX7



SCALE	SHEET	REV.
1/1	1/2	A1