

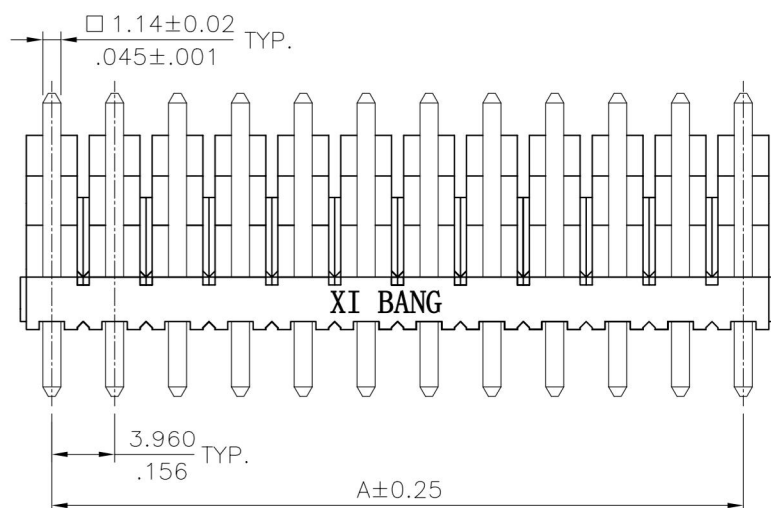
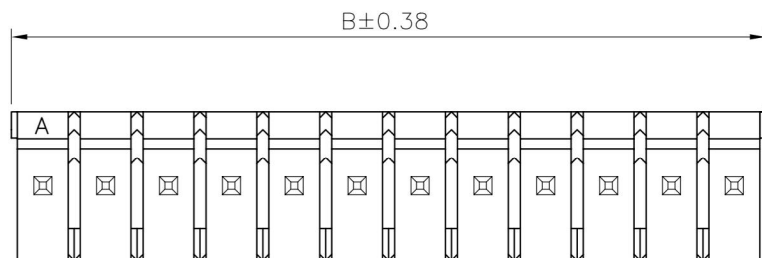


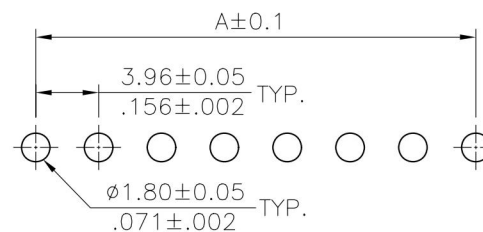

$A = 3.96 \times \text{No. of Spaces}$

$B = A + 3.96$

* Available in 2 through 24 circuits

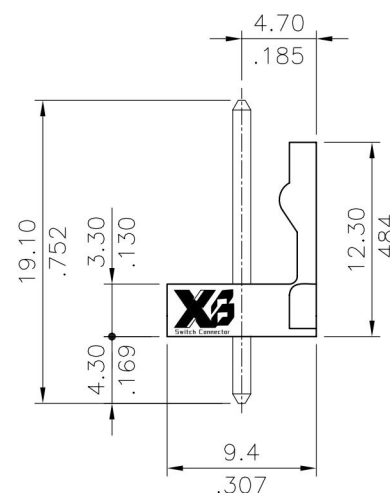

Recommended P.C. Board Layout

Material:

* Insulation: Glass filled polyester UL 94V-0

Color White(Nature)

* Contact: Brass

Ordering Code:

CI82 ** P * V 00
① ② ③ ④ ⑤ ⑥

① Series No.

② No. of Circuits

③ Contact type: P= Pin header

④ Plating option:

1= $3.05\mu\text{m}$ (120 μ ”) Min. Tin
over $0.76\mu\text{m}$ (30 μ ”) Nickel

2= Gold flash plated over
 $1.27\mu\text{m}$ (50 μ ”) Nickel

3= $0.38\mu\text{m}$ (15 μ ”) Gold plated
over $1.27\mu\text{m}$ (50 μ ”) Nickel

4= $0.76\mu\text{m}$ (30 μ ”) Gold plated
over $1.27\mu\text{m}$ (50 μ ”) Nickel



⑤ Tail Style: V= Straight

⑥ Option: 00= Standard

Tin-Lead Process

RoHS Compliant



4						DATE	UNIT: mm / inch	TITLE: 3.96MM(.156") STRAIGHT DIP HEADER	XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY:	Sun	11/02-04'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
2				ENGINEER:	Eisley	11/04-04'	.X ± 0.38/.015	X' ± 1"				
1	SUN	9/30/03'	ECN03330/ECR03030-0	CHECKED BY:	David	11/04-04'	.XX ± 0.25/.010	.X" ±				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	11/04-04'	.XXX ± 0.10/.004	.XX" ±				
									MATERIAL:			
									FINISH:			
									DRAWING NO.	CI8201SD	PART NO.	CI82**P*V00
									SCALE	2 / 1	SHEET	1 OF 1

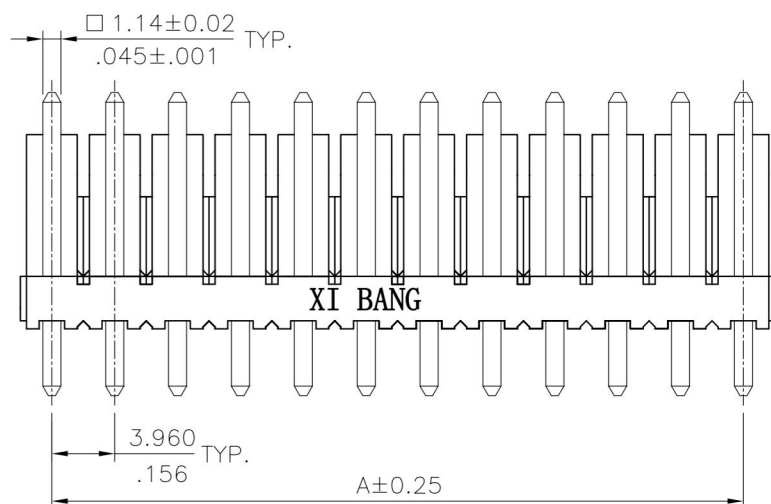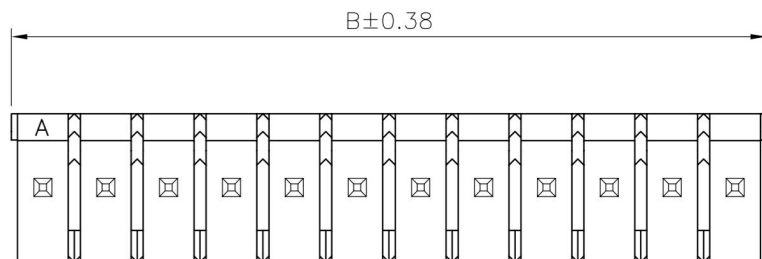

$A = 3.96 \times \text{No. of Spaces}$

$B = A + 3.96$

* Available in 2 through 24 circuits

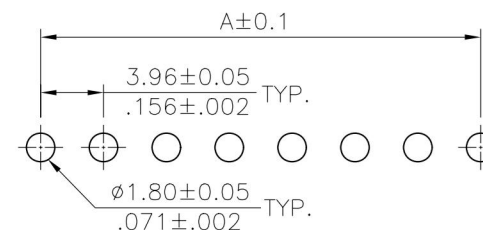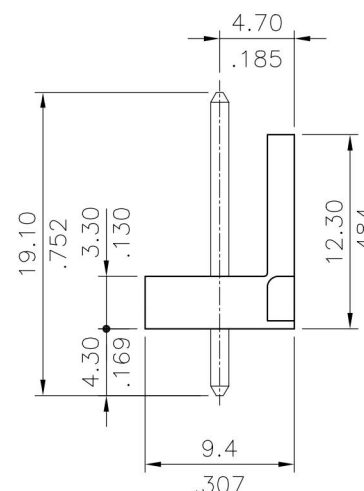

Recommended P.C. Board Layout

Material:

* Insulation: Glass filled polyester UL 94V-0
Color White(Nature)

* Contact: Brass

Ordering Code:

CI82 ** P * V OL
① ② ③ ④ ⑤ ⑥

① Series No.

② No. of Circuits

③ Contact type: P= Pin header

④ Plating option:

1= $3.05 \mu\text{m}$ (120μ) Min. Tin
over $0.76 \mu\text{m}$ (30μ) Nickel

2= Gold flash plated over
 $1.27 \mu\text{m}$ (50μ) Nickel

3= $0.38 \mu\text{m}$ (15μ) Gold plated
over $1.27 \mu\text{m}$ (50μ) Nickel

4= $0.76 \mu\text{m}$ (30μ) Gold plated
over $1.27 \mu\text{m}$ (50μ) Nickel

⑤ Tail Style: V= Straight

⑥ Option: OL= Without Locking Ramp

Tin-Lead Process

RoHS Compliant

4					DATE	UNIT: mm / inch		TITLE: 3.96MM(.156") STRAIGHT DIP HEADER	XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.				
3				DRAWN BY:	Sun	10/03-03'	TOLERANCE UNLESS OTHERWISE SPECIFIED			MATERIAL:			
2				ENGINEER:	Eisley	10/06-03'		.X ± 0.38/.015			X' ± 1'		
1	SUN	9/30/03'	ECN03330/ECR03030-0	CHECKED BY:	David	10/08-03'	.XX ± 0.25/.010	.X' ±		DRAWING NO.	CI8203SD	PART NO.	CI82**P*VOL
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	10/08-03'	.XXX ± 0.10/.004	.XX' ±	FINISH:	SCALE	2 / 1	SHEET 1 OF 1	