



XB-FPC -1013 S R 15 -XX X XX 01

XB connector

Series No

Termipoint
S-SMT

Angle
R-90°

Terminal Plating
MT-Matte tin
01-G/F

Housing Colour
S-Nature

Pin Q' PY
04~30






Height
15-1.50mm

XB-FPC specifications:

- 1.Current rated: 0.5A AC/DC
- 2.Voltage rating: 50V AC/DC
- 3.Withstanding voltage: 250V AC
- 4.Contact resistance: 40mΩ max.
- 5.Insulation resistance: 500MΩ min
- 6.Durability cycle: 20Cycles
- 7.Removal force: 0.03kgf/Pin min
- 8.Operating temperature range: -25°C ~ +85°C

Ordering Information:

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
4	8.60	3.00	5.07	17	21.60	16.00	18.07
5	9.60	4.00	6.07	18	22.60	17.00	19.07
6	10.60	5.00	7.07	19	23.60	18.00	20.07
7	11.60	6.00	8.07	20	24.60	19.00	21.07
8	12.60	7.00	9.07	21	25.60	20.00	22.07
9	13.60	8.00	10.07	22	26.60	21.00	23.07
10	14.60	9.00	11.07	23	27.60	22.00	24.07
11	15.60	10.00	12.07	24	28.60	23.00	25.07
12	16.60	11.00	13.07	25	29.60	24.00	26.07
13	17.60	12.00	14.07	26	30.60	25.00	27.07
14	18.60	13.00	15.07	27	31.60	26.00	28.07
15	19.60	14.00	16.07	28	32.60	27.00	29.07
16	20.60	15.00	17.07	30	34.60	29.00	31.07

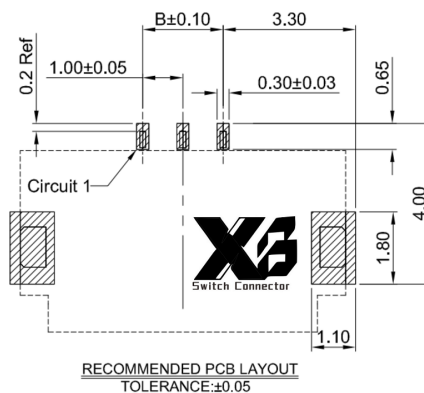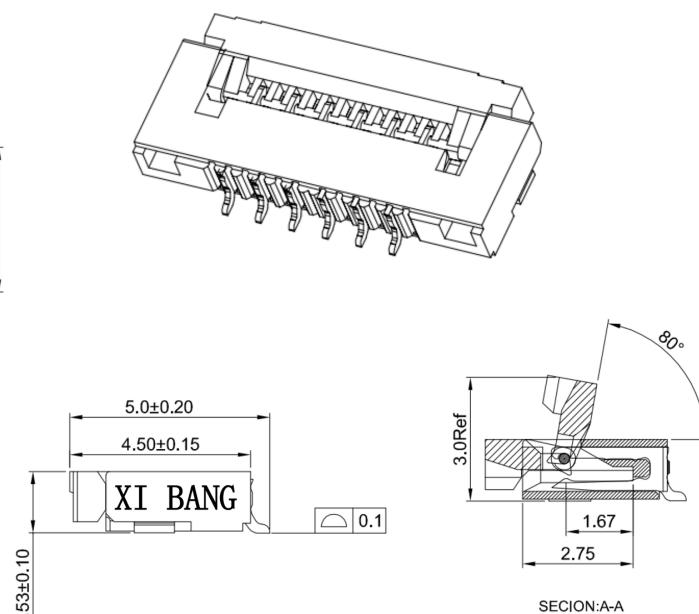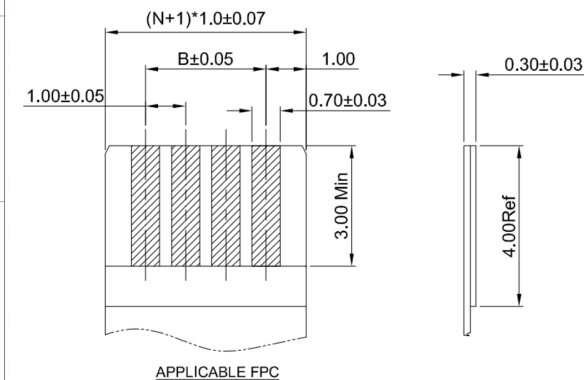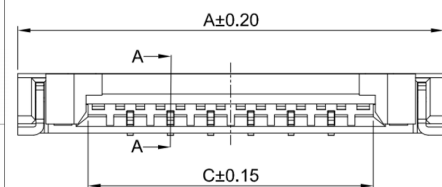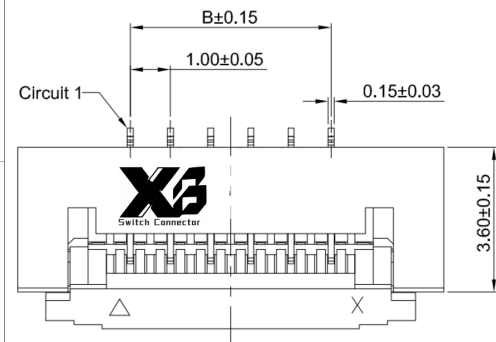

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新圖面	Jack	03/10/22



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	03/10/22
CHECKED BY:	DATE
Jacky Chen	03/10/22
APPROVED BY:	DATE
Tony Kao	03/10/22

MAT'L	TITLE	CONNECTOR
FINISH	MODLE	
SCALE	1 : 1	DWG NO. XB-FPC-1013SR15-XXXXX01
SHEET NO.	1 of 1	PART NO.

SIZE
A4
VER
R1