

RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	11/22'16			
A1	ECN1711008	取消D面胶面凸点, 增加重点标示	11/16'17	SUPER	SKY	WZX

NOTES:



1. MATERIAL:

INSULATOR: HIGH TEMPERATURE THERMO
PLASTICFLAMMABILITY RATING: UL94V-0 COLOR:
BLACK

CONTACT: COPPER ALLOYS

COVER: STAINLESS STEEL

2. CONTACT AREA PLATING: GOLD 15U" OVER NI
3. SOLDER TAIL COPLANARITY MUST BE WITHIN
0.10MAX.

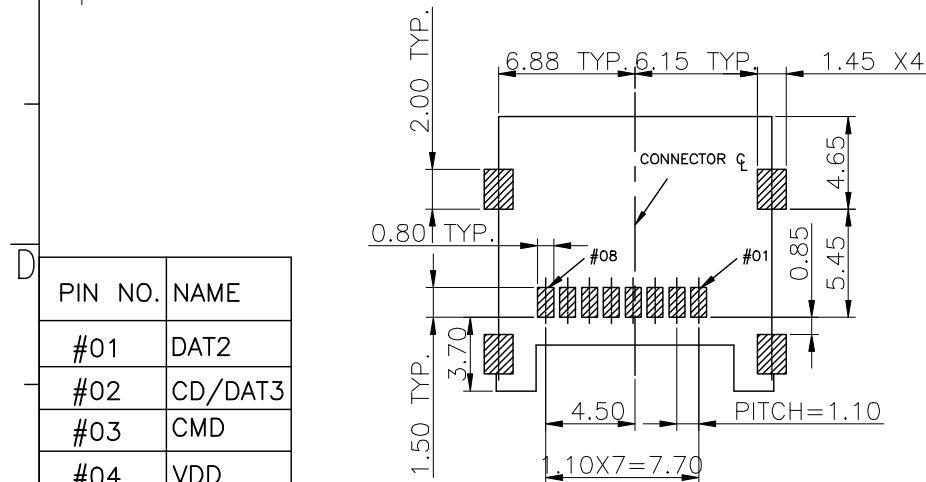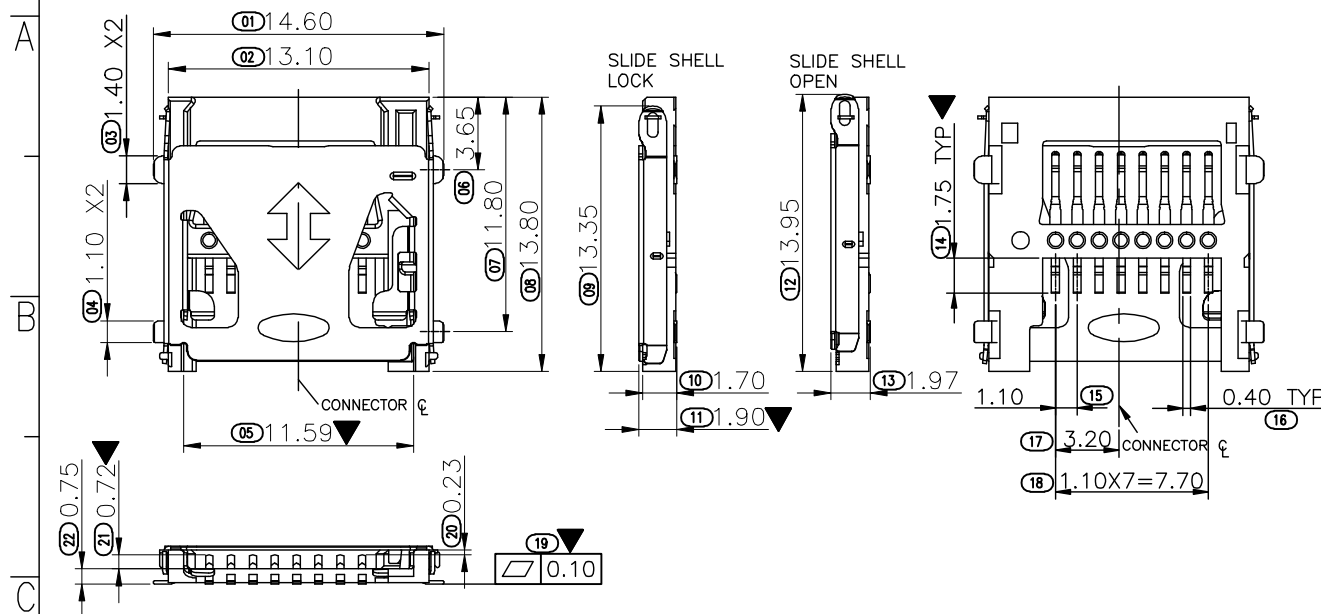



RECOMMENDED PCB LAYOUT(TOP VIEW)

GENERAL TOLERANCES:±0.05


 SOLDER AREA

PIN NO.	NAME
#01	DAT2
#02	CD/DAT3
#03	CMD
#04	VDD
#05	CLK
#06	VSS
#07	DAT0
#08	DAT1

MILLIMETERS	INCH	UNITS	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.										
X' ± 2'	X' ± 2'	MAT'L											
.X ± 0.30	.XX ± 0.012	SEE NOTES	PART NUMBER:		TITLE:								
.XX ± 0.20	.XXX ± 0.008	FINISH	XB-102151482		TF掀盖1.9卡座								
.XXX± 0.10	.XXXX± 0.004		APPD:		DWG NO.:								
		SEE NOTES	CHKD:		C-102151482-00								
		QTY	DR:		 <table><tr><td>SCALE</td><td>SHEET</td><td>REV.</td></tr><tr><td>1:1</td><td>1/2</td><td>A1</td></tr></table>			SCALE	SHEET	REV.	1:1	1/2	A1
		SCALE	SHEET	REV.									
1:1	1/2	A1											
SEE NOTES													


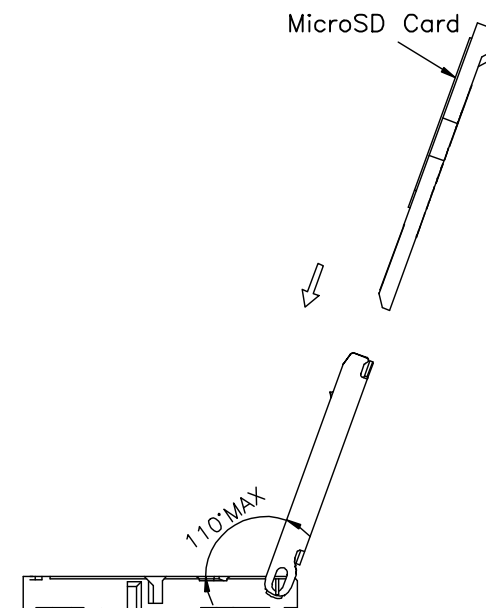


RoHS

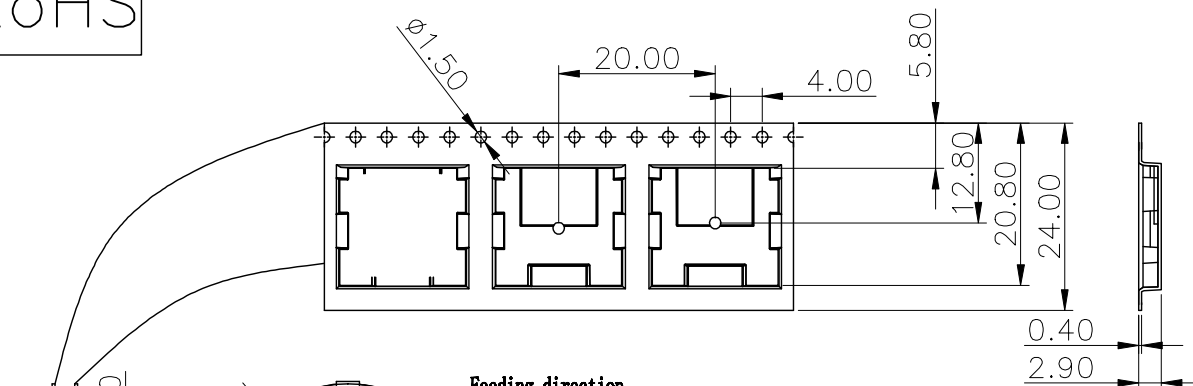


注:


1. 将检好的产品放入载带内, 每盘1000PCS/盘
2. 将检好的1盘产品装入相应的外箱, 每箱10盘, 并在纸箱四角放入护角, 纸箱底部和顶部各垫一块珍珠棉.
3. 用封胶将装好产品的纸箱以“工”形封好, 贴好产品标签.
4. 每箱包装数量:10000PCS/箱
5. 纸箱350mm*350mm*340mm(内部尺寸), 材质K-K

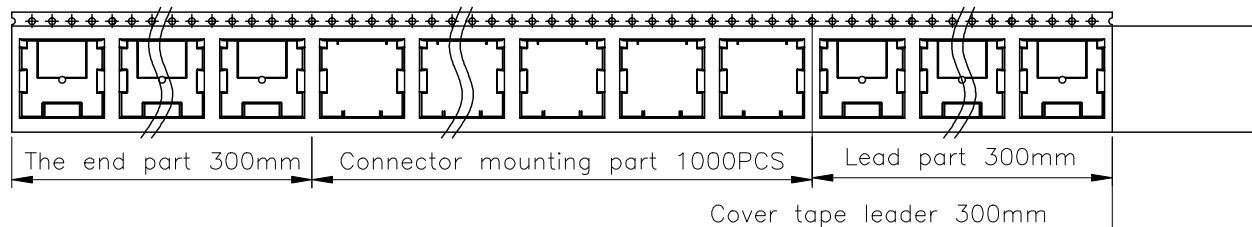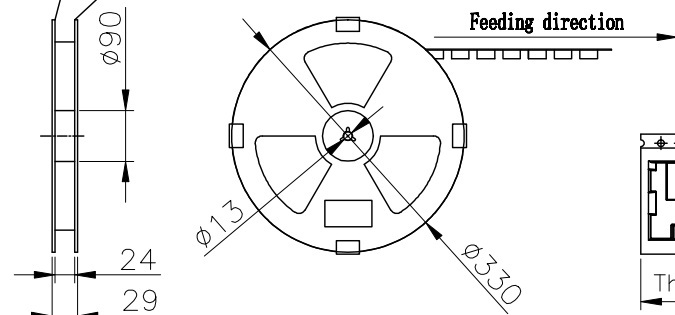

纸箱底部和顶部各垫一块珍珠棉



将10卷产品放入箱内

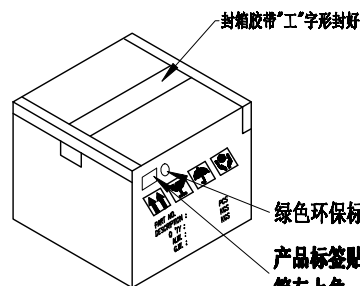

封箱胶带“工”字形封好

绿色环保标签 (RoHS)

产品标签贴在纸箱左上角

MILLIMETERS	INCH	UNITS	东 莞 市 溪 榜 电 子 有 限 公 司		
		MM	DONG GUAN XI BANG ELECTRONICS CO., LTD.		
X ± 2	X ± 2	MAT'L	PART NUMBER: XB-102151482		
.X ± 0.20	.XX ± 0.012	SEE NOTES	TITLE: 1.9卡座		
.XX ± 0.10	.XXX ± 0.008	FINISH	APPD: DWG NO.: C-102151482-00		
.XXX ± 0.05	.XXXX ± 0.008	SEE NOTES	CHKD: SCALE 1:1		
ARE			SHEET 2/2		
OUT			REV. A1		
SEE NOTES			DR:		